



ROHS
2002/95/EC

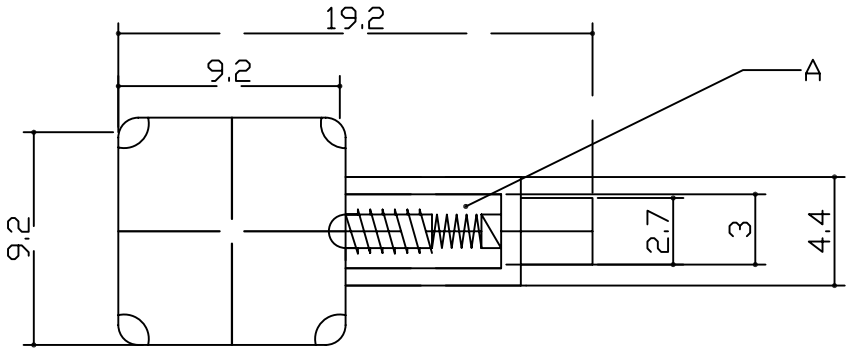

SPECIFICATION
RATING: DC 30V 0.3A
CONTACT RESISTANCE: 30M MAX (INITIAL)
INSULATION RESISTANCE: 100M AT 500V DC
WITHSTAND VOL TAGE: AC 500V FOR 1 MIN
OPERATIONFORCE: REFERATTACHSPECIFICATION
SWITCHING LIFE: 10000 CYCLES(15–18C/M UNL OAOING)

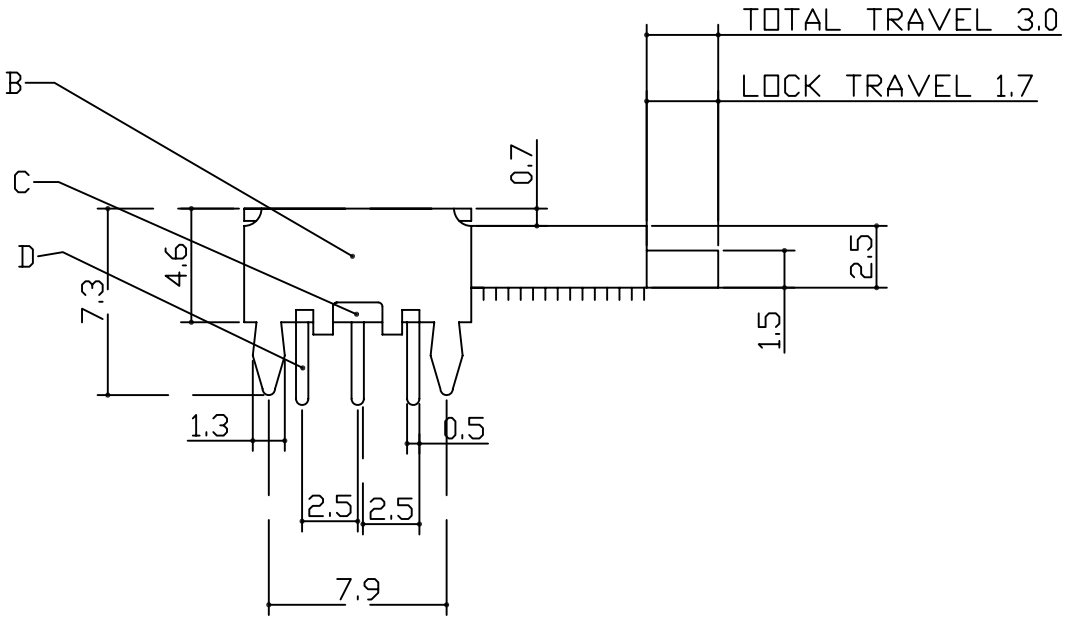

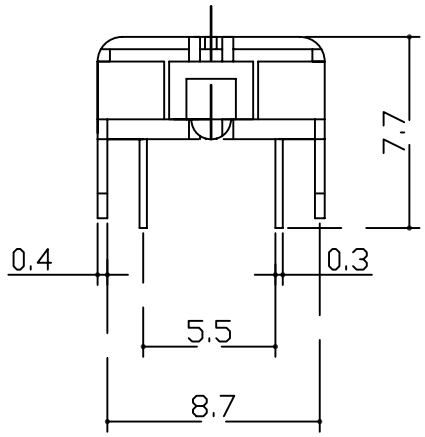

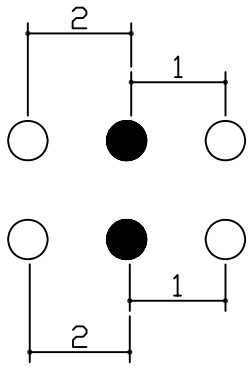

TITLE: PUSH SWTTCH			PLASTICTOL: ±0.20	
MODEL NO: PS–22E02			METAL TOL: ±0.10	
FILE NAME: PS–22E03			UNIT: mm	
DRAWN BY: S.Y.W	DATE: 1–4–9		SCALE: 3 :1	
APPROVEDBY:	DATE:			

东莞市皓宇电子有限公司

ITEM	PART	MATERIAL	QAY	REMARKS
G				
H				
G	STEEL BALL	STAINLESS STEEL	2	NATURAL
F	CONTACT(CLIP)	P.B.S STRIP	2	AG PLATED
E	SPRING	STEEL STRIP	1	NI PLATEDORNATURAL
D	TERMAINAL	BRASS STRIP	10	AG PLATED
C	TERMAINALBASE	PHENOL IC RESIN	1	NATURAL
B	FRAME	STEEL STRIP	1	NI PLATED
A	KNOB	POM	1	BLACK