

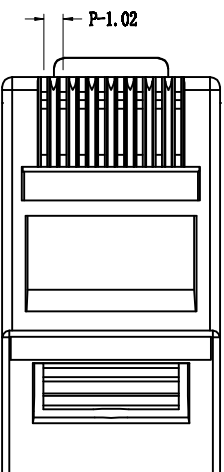


G		H	
ECN NO.	DATE	修改	批准

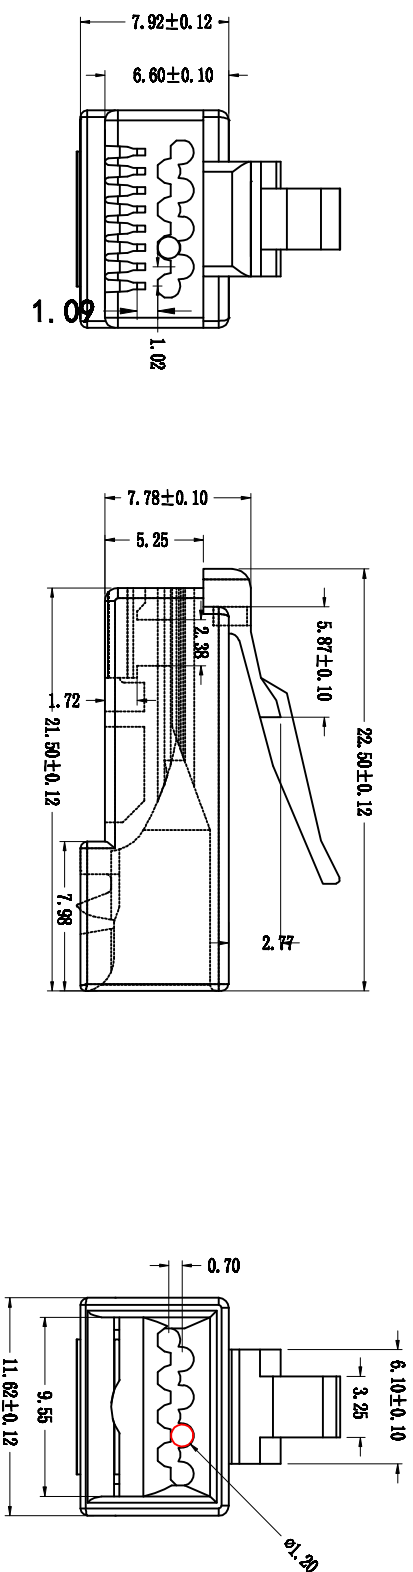

FEATURES:

1 Electrical Test:

- A. 250V AC max at 2 amps.
 - B. Dielectric with standing 500volts AC.
 - C. Insulation Resistance:500 megaohms.
 - D. Termination Resistance:35megaohms.
- ### 2 Mechanical:
- A. Cable-to-Plug tensile strength-20LBs (89N) min.
 - B. Durability:500 mating cycles.
 - C. gold plating(口01, 口03, 口06, 口15, 口30, 口50)u"

REV.	版本	DATE	日期	UNITS	单位	MM	TITLE	产品名称	MPR8C
DRAWN	绘图	2018.04.28	比例	FULL	产品编号	双排 8 孔	第三角法		
APPROVED	审核	PC	材质	TOL.	公差	0.00	±0.12	视图	
FIRING	防火等级	94V2	(聚碳酸酯)						

东莞市华翔电子有限公司