

SWITCH / PUSH SWITCH

PB-4066 Foot switches

Push button switches, up to 4A 125VAC, 2A 250VAC
ON-ON or (ON)-ON function, Solder or PC through hole terminals

[PDF Download](#)[Get Information](#)[ZOOM IN](#)

Feature


- Metal push button
- M12P0.75 busing
- Solder or PC through hole terminals
- ON-ON or (ON)-ON function
- Hardware accessories supplied

Specification

- Rating: 4A 125VAC/ 2A 250VAC
- Contact Resistance: 50m Ohms Max.
- Insulation Resistance: DC 500V 100M ohms Min.
- dielectric Strength: AC 1500V 1 min.


- Electrical Life: 20,000 cycles at full load.
- Operating Temperature: -20~ 65 degree C

Item

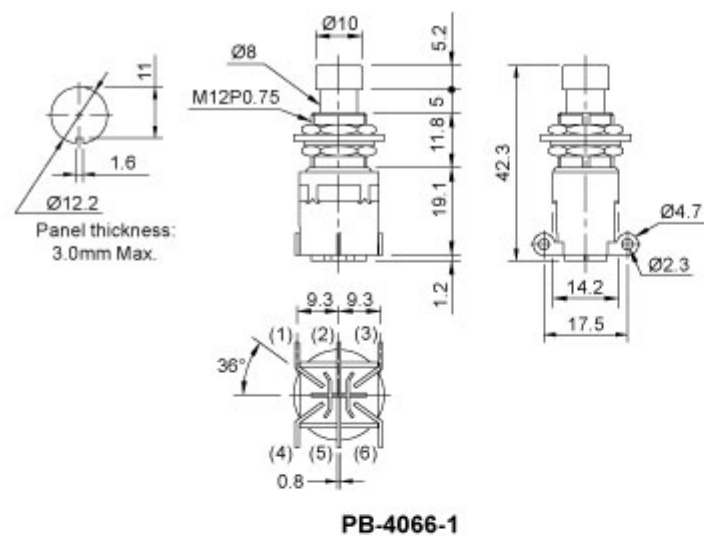

Solder Terminals

P/N	THROW	FUNCTION
PB-4066	SPDT	ON-ON
PB-4066M	SPDT	(ON)-ON
PB-4066-1	DPDT	ON-ON
PB-4066-1M	DPDT	(ON)-ON

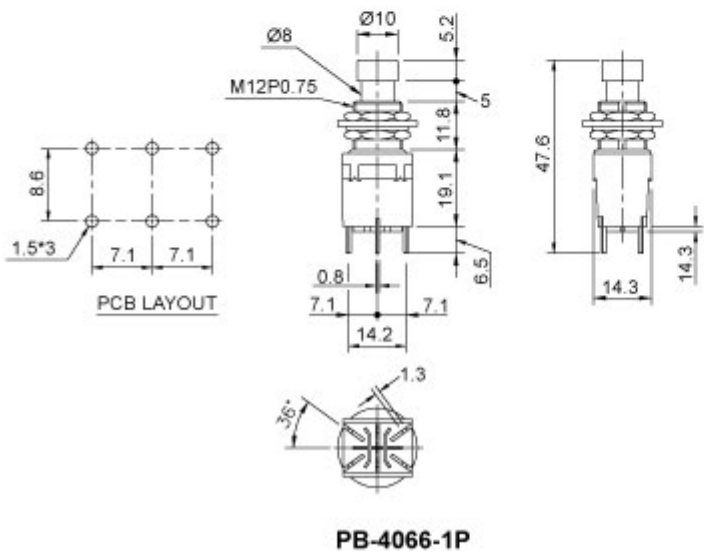

PC Terminals

P/N	THROW	FUNCTION
PB-4066P	SPDT	ON-ON
PB-4066PM	SPDT	(ON)-ON
PB-4066-1P	DPDT	ON-ON
PB-4066-1PM	DPDT	(ON)-ON

 Start Print

Canal Components Inc. Tel:+886-2-29161263 Fax:+886-2-29117574
Copyright ©2009 Canal Components Inc.. All rights reserved.