
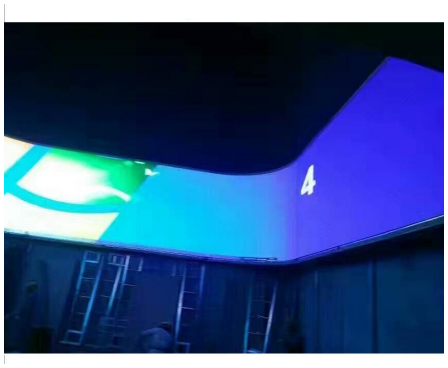
深圳市星光彩科技有限公司
Shenzhen Xing Guang Cai Technology Co.,Limited

Add: No.2505 Songbai Road Shiyan Town, Baoan District, Shenzhen, China
Contact Person:Ms Helen Qin Skype:helenqin32 Mob/WhatsApp/ Wechat: +86 17688933149
Email:sales02@szxgcled.com
Web：www.xgcled.com

P10 outdoor LED display parameter

LED Module		
	pixel pitch	10mm
	module size	320*160mm
	module resolution	**32*16**
	LED	SMD3535
	Scan	1/2scan
	Application	Outdoor
	Weight	0.42KG
	LED encapsulation mode	**Kinglight /Nationstar**

LED Cabinet		
 	Cabinet Size	960*960mm or customized
	Cabinet resolution	96*96dots
	module quantity	3*6pcs
	LED driver	5V 60A 300W
	Material	**Iron**
	Receiving card	**1pcs**

LED Screen				
	Pixel density	10000dots/㎡	Continuous Working Hours	>72 hours
	Ave power consumption	200W/㎡	Using Life	100,000 hours
	Max power consumption	800W/㎡	MTBF	>10,000H
	Optimum Viewing Distance(m)	⩾10m	Scatter OOC Point	<0.01%
	Brightness(cd/m^2)	⩾7500cd	Continuous OOC Point	None
	Refresh Rate	300---2440 frame/s	IP Grade	IP65/IP54
	LED Drive mode	Constant Current	Working Temperature	-35C----+60C
	Display color	1M——69G	Working Humidity	10---90%