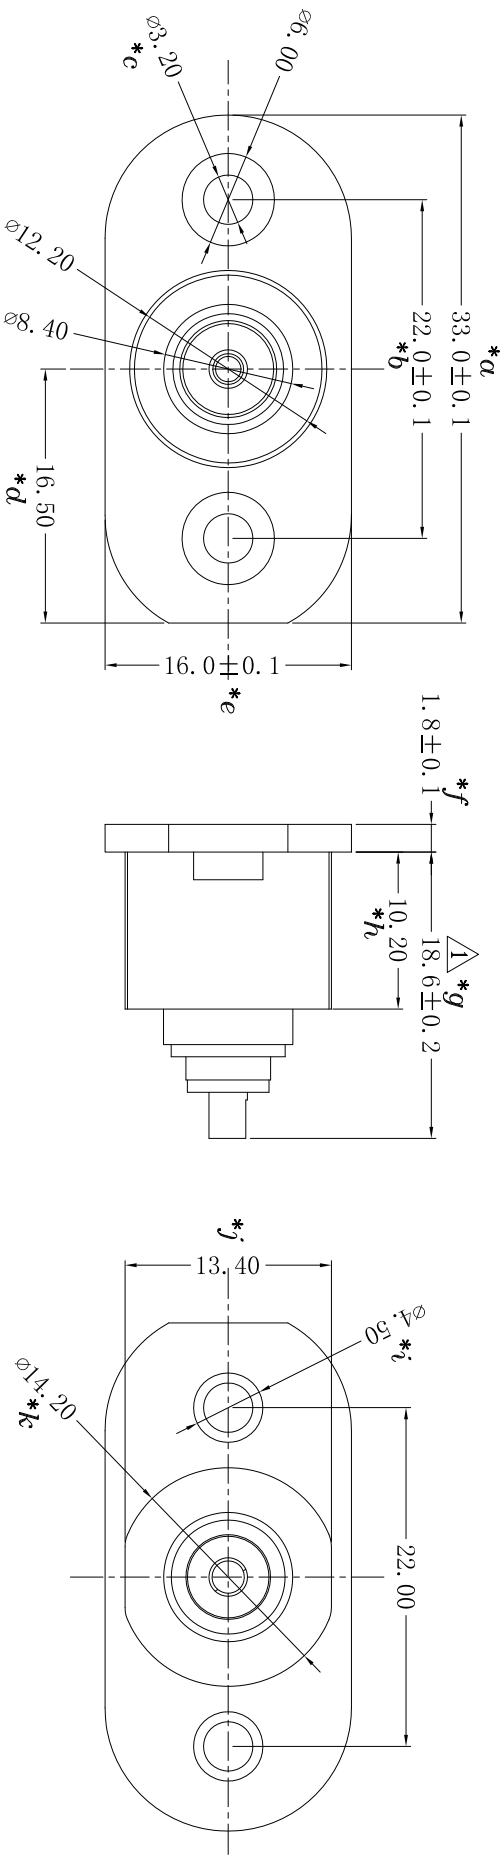


- 技术要求:
1. 额定电压DV48V 12A, 接触电阻<50mΩ
 2. 机械插拔寿命5000次
 3. 产品外露面细火花纹
 4. 进料口, 合模线, 靠破孔等毛边<0.10mm.
 5. 重点监控密封胶位披锋
 6. “*”重点管控尺寸.

TOLERANCE UNLESS SPECIFIED									
UP TO 5mm : ±0.05	ANGULAR ±1°	A1	2024.12.11	△1 配合焊线需求, 正负极PIN针加高1.0	GYW				
ABOVE 5mm :		A0	2024.07.22	首次发行	GYW				
PART NAME : RTC35B-BCPB-B00	NO	DATE		REVISIONS					
FOR MODEL : RT-C35B-B3	MATERIAL : PBT4130			ROHS COMPLIANT	DWN	BY	APPD		
UNIT : MM	FINISHING : BLACK				CHK'D				
SCALE : 8 : 1	REV : A1				APPD				
皓宇 HAOYA				DONGGUANG HAOYU ELECTRONICS CO., LTD				PRO.AGL :	
东莞市弘皓电子有限公司									

截面 X-X