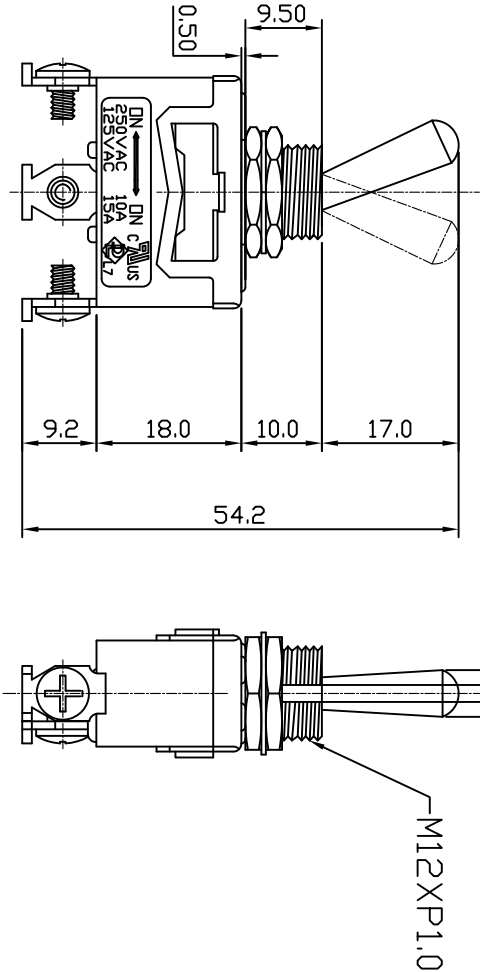
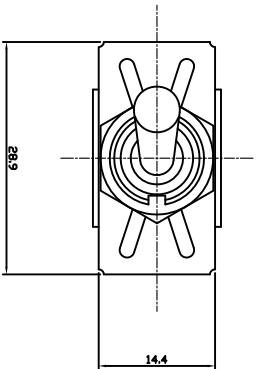


ND.	MODEL	SWITCH FUNCTION			TERMINAL		CONNECTED TERMINALS	
		POS.1	POS.1	POS.1	QUANTITY	POS.1	POS.1	POS.1
POLES	ND. UL							
SPDT	704-2 67-A-11-23	DN	NONE	DN	3P	1-2	—	2-3

MDM=MDMENTARY

SPECIFICATION

- 1.PATING:10A 250VAC,15A 125VAC
- 2.INSULATION RESISTANCE:DC 500V 200MΩ OR MORE
- 3.CONTACT RESISTANCE:DC 2-4V 1A 20MΩ OR LESS
- 4.WITHSTAND VOLTAGE:AC 1500V DR MORE
- 5.UL NO:E217512

端子種類尺寸 Termination Options

H1	H2	H3	H4	H5

產品 PRODUCT	POWER TOGGLE SWITCH			喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION
比例 SCALE	1:1	單位 UNIT	MM	公差 TOLERANCE
				±0.3MM