

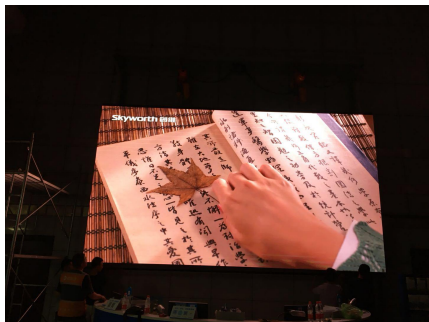


深圳市星光彩科技有限公司
Shenzhen Xing Guang Cai Technology Co.,Limited

Indoor P2.5 Full Color LED Display Parameter

LED Module		
	pixel pitch	2.5mm
	module size	160*160mm
	module resolution	64*64
	LED	SMD2121
	Scan	1/32scan
	Application	Indoor

LED Cabinet		
	Cabinet Size	480mm (W) *480mm (H)
	Cabinet resolution	192*192dots
	Module quantity	3*3pcs
	Power supply	5V 40A (220V)
	Material	Die casting aluminum
	Receiving card	1pcs

LED Screen				
	Pixel density	160000dots/m²	Continuous Working Hours	>72 hours
	Ave power consumption	500W/m²	Using Life	100,000 hours
	Max power consumption	1000W/m²	MTBF	>10,000H
	Optimum Viewing Distance(m)	≥2.5m	Scatter OOC Point	<0.01%
	Brightness(cd/m²)	≥1200cd	Continuous OOC Point	None
	Refresh Rate	1920HZ	IP Grade	IP45/IP30
	LED Drive mode	Constant Current	Working Temperature	-35℃ ~ +60℃
	Display color	17M——69G	Working Humidity	10-70%