

XQJ 托盘式电缆桥架


XQJ Tray-type Support

托盘式桥架是石油、化工、电力、电视电讯等方面最广泛应用的理想敷设装置。它具有重量轻、载荷大、造型美观、结构简单、安装方便、散热透气性好等优点、既适用于动力电缆的安装，也适用于控制电缆的敷设。

Tray-type cable support systems are ideal cable laying devices most broadly applied in petroleum industry, chemical industry, power and light industries, television and telecommunication. It is featured by such advantages as small weight, great loading capacity, good-looking shape, simple structure, convenient erection, quick heat dissipation and fine permeability.

XQJ-P-01 托盘式直通

XQJ-P-01 Tray type straight support

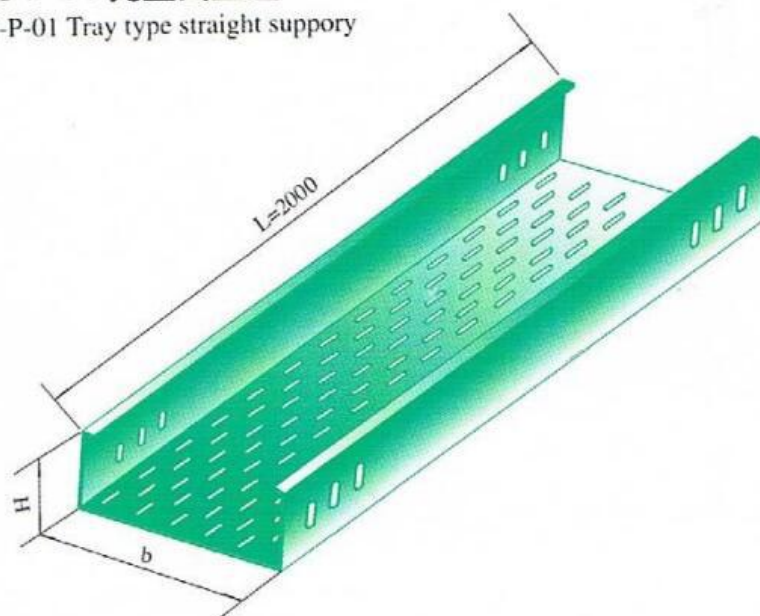


型号 Model	b (mm)	H (mm)	重量 kg Weight
P-01-6-2	200	60	17.65
P-01-10-2		100	24.85
P-01-15-2		150	29.82
P-01-20-2		200	35.78
P-01-6-3	300	60	26.04
P-01-10-3		100	29.19
P-01-15-3		150	35.14
P-01-20-3		200	40.99
P-01-6-4	400	60	39.64
P-01-10-4		100	44.94
P-01-15-4		150	51.52
P-01-20-4		200	58.88
P-01-6-5	500	60	46.35
P-01-10-5		100	51.53
P-01-15-5		150	58.52
P-01-20-5		200	65.39
P-01-6-6	600	60	57.12
P-01-10-6		100	62.29
P-01-15-6		150	68.85
P-01-20-6		200	76.99
P-01-6-8	800	60	70.95
P-01-10-8		100	77.12
P-01-15-8		150	84.83
P-01-20-8		200	92.54

说明: 高度 h=60,100 为单排连接孔, 高 h=150 为双排连接孔。

Description: h=60, single-row connection holes; h=150, double-row connection holes

XQJ-P-02 水平弯通

XQJ-P-02 Tray type horizontal bend

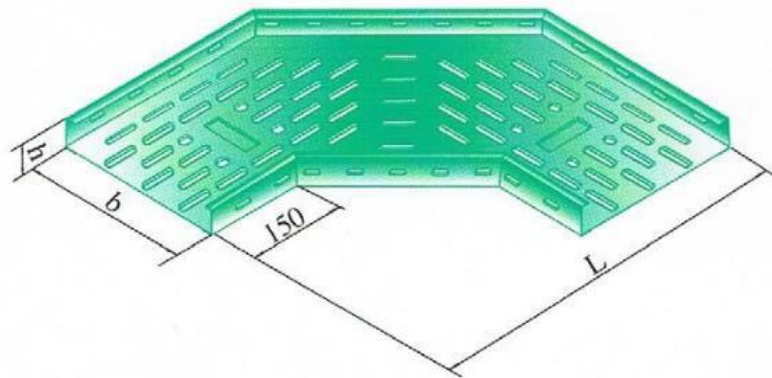


型号 Model	b (mm)	h (mm)	L (mm)	重量 kgWeight
P-02-6-2	200	60	550	6.83
P-02-10-2		100		8.03
P-02-15-2		150		12.60
P-02-20-2		200		15.12
P-02-6-3	300	60	650	9.50
P-02-10-3		100		10.99
P-02-15-3		150		17.48
P-02-20-3		200		19.98
P-02-6-4	400	60	750	19.23
P-02-10-4		100		21.80
P-02-15-4		150		29.62
P-02-20-4		200		33.85
P-02-6-5	500	60	850	25.22
P-02-10-5		100		28.19
P-02-15-5		150		36.94
P-02-20-5		200		41.56
P-02-6-6	600	60	950	31.87
P-02-10-6		100		35.07
P-02-15-6		150		44.59
P-02-20-6		200		49.54
P-02-6-8	800	60	1150	41.87
P-02-10-8		100		46.80
P-02-15-8		150		63.22
P-02-20-8		200		68.97

说明: 高度 h=60,100 为单排连接孔, 高 h=150 为双排连接孔。

Description:h=60,single-row connection holes,h=150,double-row connection holes

XQJ-P-03 水平三通

XQJ-P-03 Tray type horizontal Tee

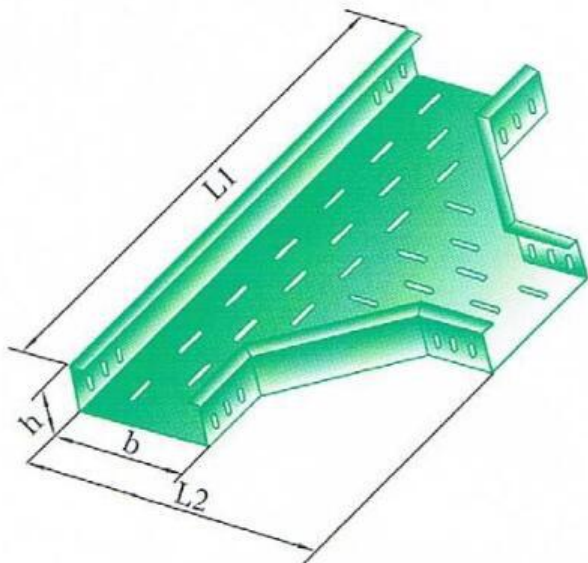

型号 Model	b (mm)	h (mm)	L1 (mm)	L2 (mm)	重量 kg Weight
P-03-6-2	200	60	900	550	10.02
P-03-10-2		100			14.10
P-03-15-2		150			21.24
P-03-20-2		200			25.49
P-03-6-3	300	60	1000	650	16.40
P-03-10-3		100			18.36
P-03-15-3		150			26.39
P-03-20-3		200			30.79
P-03-6-4	400	60	1100	750	26.34
P-03-10-4		100			29.21
P-03-15-4		150			41.75
P-03-20-4		200			47.71
P-03-6-5	500	60	1200	850	33.18
P-03-10-5		100			36.32
P-03-15-5		150			48.46
P-03-20-5		200			54.52
P-03-6-6	600	60	1300	950	40.47
P-03-10-6		100			43.77
P-03-15-6		150			59.40
P-03-20-6		200			66.00
P-03-6-8	800	60	1500	1150	57.57
P-03-10-8		100			60.86
P-03-15-8		150			70.29
P-03-20-8		200			76.68

说明: 高度 h=60,100 为单排连接孔, 高 h=150 为双排连接孔。
Description: h=60, single-row connection holes; h=150, double-row connection holes

XQJ 梯级式电缆桥架


XQJ Ladder-type Support

梯级式桥架是根据国外有关技术及我厂产品的特点改进而成，它具有重量轻、成本低、造型别致、通风散热性能好等特点。它适用于一般直径较大的电缆敷设，特别适用于高、低压动力电缆的敷设。

Ladder-type cable support systems are products manufactured at this factory by referring to relevant technical data of other countries and maintaining the characteristics of the original products of this factory. It features small weight, low cost, unique shaping, fine permeability and quick heat dissipation. It is applicable for laying of big-diameter cables, especially high-voltage, low-voltage and power cables.

XQJ-T-01 梯级直通

XQJ-T-01 Ladder-type straight Cable support

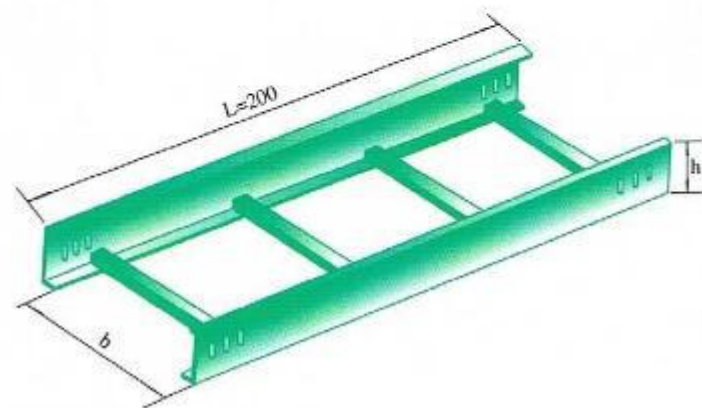


序号 No.	型号 Model	b (mm)	h (mm)	重量 kg Weight
1	T-01-6-2	200	60	13.11
2	T-01-10-2		100	20.02
3	T-01-15-2		150	29.80
4	T-01-6-3	300	60	14.43
5	T-01-10-3		100	21.38
6	T-01-15-3		150	31.05
7	T-01-6-4	400	60	21.51
8	T-01-10-4		100	26.11
9	T-01-15-4		150	32.45
10	T-01-20-4	500	200	43.28
11	T-01-6-5		60	24.01
12	T-01-10-5		100	27.46
13	T-01-15-5	600	150	33.79
14	T-01-20-5		200	45.05
15	T-01-6-6		60	25.34
16	T-01-10-6	800	100	28.79
17	T-01-15-6		150	35.11
18	T-01-20-6		200	46.82
19	T-01-6-8	800	60	29.14
20	T-01-10-8		100	31.44
21	T-01-15-8		150	37.77
22	T-01-20-8		200	50.36

说明: 高度 h=60, 100 为单排连接孔, 高 h=150 为双排连接孔。
Description: h=60, single-row connection holes; h=150, double-row connection holes

XQJ-T-02 水平彎通

XQJ-T-02 Ladder-type horizontal bend

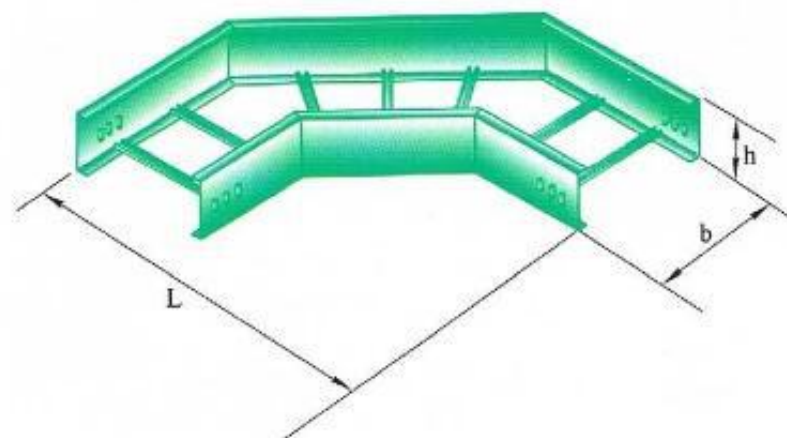


序号 No.	型号 Model	b (mm)	h (mm)	L (mm)	重量 kg Weight
1	T-02-6-2	200	60	500	6.77
2	T-02-10-2		100		8.00
3	T-02-15-2		150		14.38
4	T-02-6-3	300	60	600	8.58
5	T-02-10-3		100		9.96
6	T-02-15-3		150		17.19
7	T-02-6-4	400	60	700	9.17
8	T-02-10-4		100		11.33
9	T-02-15-4		150		19.23
10	T-02-20-4	500	200	800	25.65
11	T-02-6-5		60		12.11
12	T-02-10-5		100		14.50
13	T-02-15-5	600	150	900	22.31
14	T-02-20-5		200		29.75
15	T-02-6-6		60	1000	14.03
16	T-02-10-6	800	100		16.79
17	T-02-15-6		150		24.61
18	T-02-20-6		200	1100	32.81
19	T-02-6-8	800	60		15.63
20	T-02-10-8		100	1200	18.69
21	T-02-15-8		150		29.21
22	T-02-20-8		200		38.95

说明: 高度 h=60,100 为单排连接孔, 高 h=150 为双排连接孔。

Description: h=60, single-row connection holes; h=150, double-row connection holes

XQJ-T-03 水平三通

XQJ-T-03 Ladder type horizontal Tee

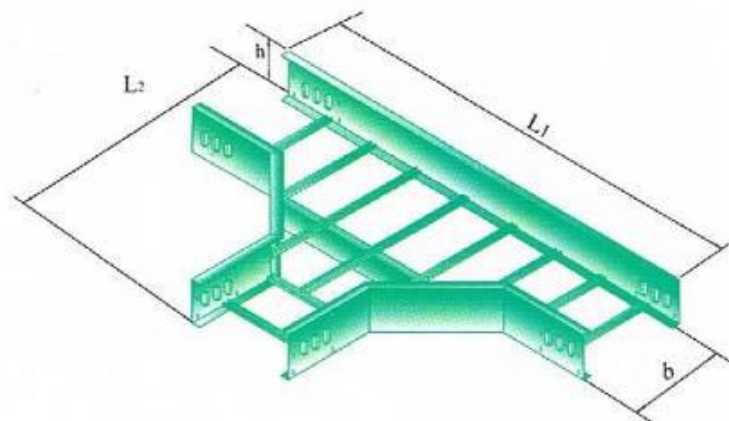

序号 No.	型号 Model	规格 Size	h (mm)	L ₁ (mm)	L ₂ (mm)	重量 kg Weight
1	T-03-6-2	200	60	800	500	9.29
2	T-03-10-2		100			12.26
3	T-03-15-2		150			21.94
4	T-03-6-3	300	60	900	600	11.52
5	T-03-10-3		100			14.20
6	T-03-15-3		150			24.38
7	T-03-6-4	400	60	1100	700	14.72
8	T-03-10-4		100			16.74
9	T-03-15-4		150			27.65
10	T-03-20-4	500	200	1200	800	36.86
11	T-03-6-5		60			15.85
12	T-03-10-5		100			18.77
13	T-03-15-5	600	150	1300	900	29.98
14	T-03-20-5		200			39.97
15	T-03-6-6		60	1200	1000	17.71
16	T-03-10-6	800	100			20.72
17	T-03-15-6		150	1400	1100	32.43
18	T-03-20-6		200			43.24
19	T-03-6-8	800	60	1600	1200	21.53
20	T-03-10-8		100			24.82
21	T-03-15-8		150			35.43
22	T-03-20-8		200			46.09

说明: 高度 h=60,100 为单排连接孔, 高 h=150 为双排连接孔。

Description:h=60,single-row connection holes,h=150,double-row connection holes