




**7101
SERIES**



SPECIFICATION

RATING	: 16A 125/ 250VAC (UL,C-UL)
INSULATION RESISTANCE	: DC 500V 100MΩ OR MORE
CONTACT RESISTANCE	: DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE	: AC 1500V FOR 1 Min
AMBIENT TEMPERATURE	: 0 °C TO 55 °C
ELECTRICAL LIFE	: 6,000 CYCLES

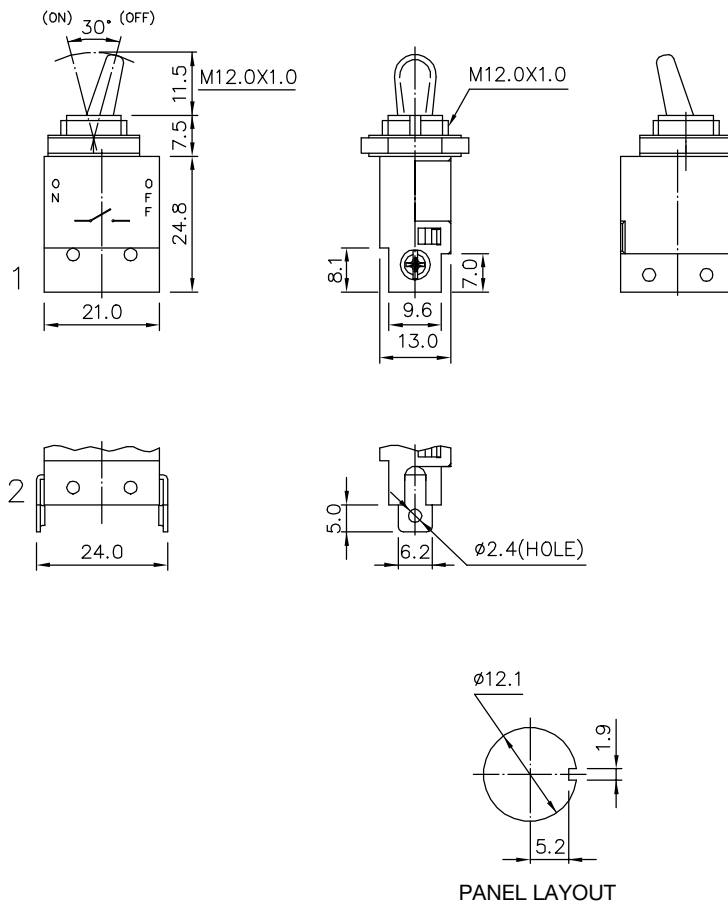

SWITCH FUNCTION				
MODEL NO.	KEY WAY	KEY WAY	KEY WAY	OPERATIONS
7101	ON	----	OFF	SPST

TERMINAL'S TYPE	
1	SCREW TERMINAL
2	SOLDER TERMINAL