



KCD3-20 (带圆蘑菇头)

额定电流、电压

16A 125/250VAC




16(8)A 250VAC T125/55

接触电阻: $\leq 50\text{m}\Omega$

绝缘电阻: $\geq 100\text{M}\Omega$

介电强度: $\geq 1500\text{VAC}/5\text{S}$

电气寿命: ≥ 10000 次

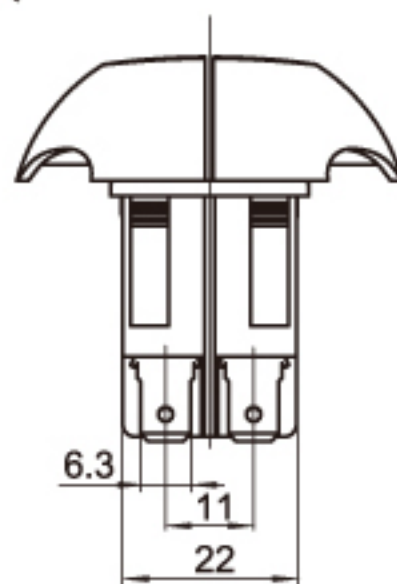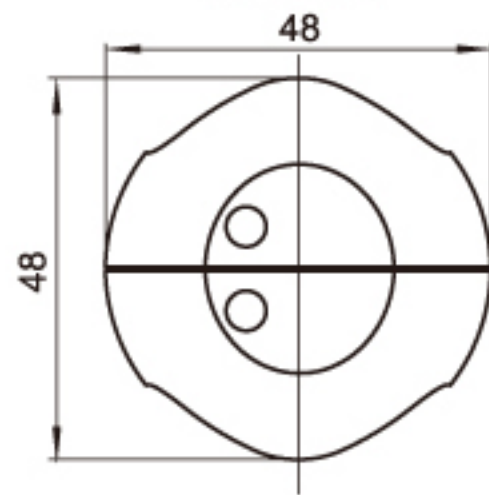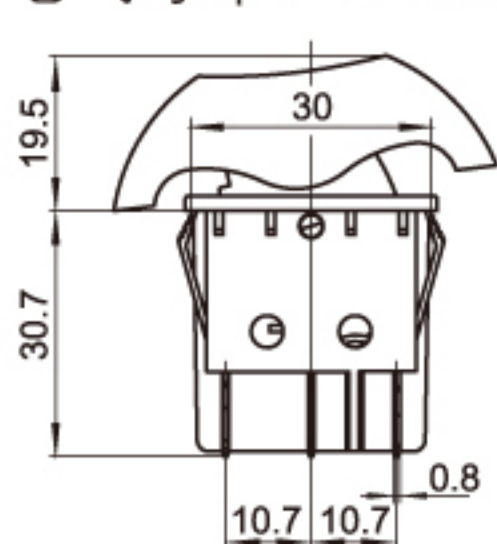

Rating:

16A 125/250VAC

16(8)A 250VAC T125/55

Contact resistance: $\leq 50\text{m}\Omega$

Insulation resistance: $\geq 100\text{M}\Omega$


Dielectric intensity: $\geq 1500\text{VAC}/5\text{S}$

Life: ≥ 10000 Cycles

序列号

电路图

KCD3-201N(MY)



端子规格

