
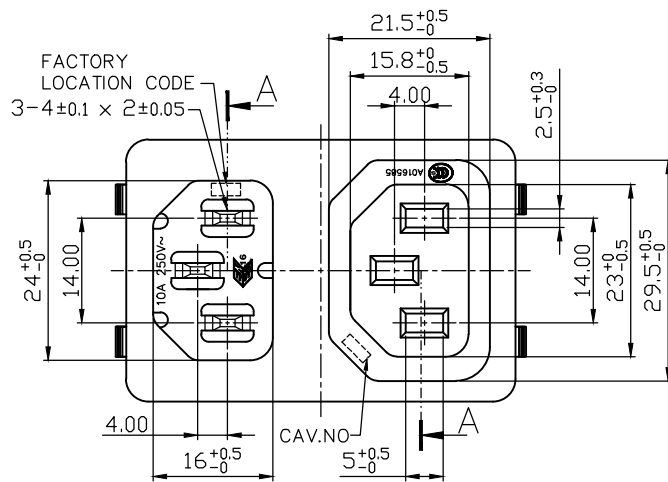
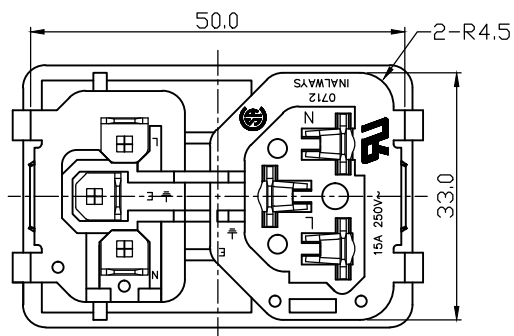



SECTION A-A

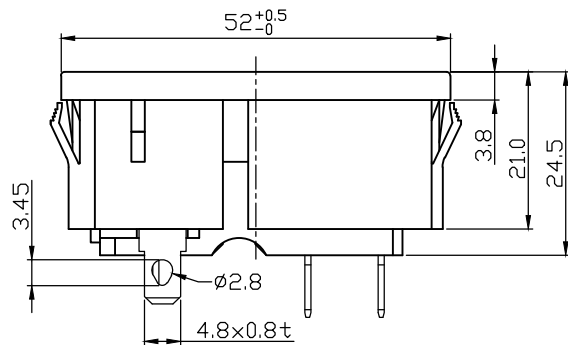

SPECIFICATION

A: MATERIAL:

1. HOUSING: NYLON 66 FLAMMABILITY, UL 94V-0
2. TERMINAL: COPPER ALLOY, TIN PLATED

B: CHARACTERISTICS:

1. RATING: 15A 250V~ NORTH AMERICA
10A 250V~ EUROPE
2. INSULATION RESISTANCE: 100 MΩ MIN, AT 500 VDC
3. ELECTRIC STRENGTH: AC 2,000 V FOR ONE MINUTE


C: APPROVALS:

UL, CSA, ENEC & CCC

THICKNESS:

0.8~1.2t, X=50.5

1.3~2.0t, X=50.8

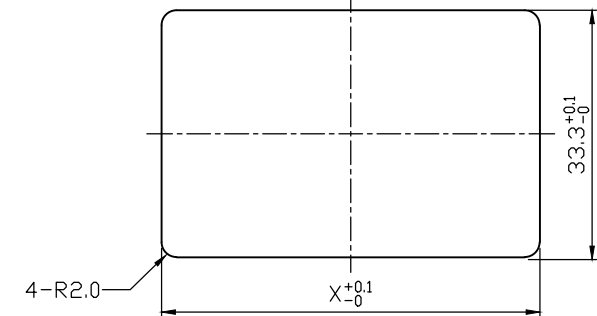

PANEL CUT-OUT

E				TOLERANCE UNLESS OTHERWISE MARKED DIMENSION: ANGULAR: 			
---	--	--	--	--	--	--	--