



Category

SWITCH

SOCKET

- INLET

- OUTLET

- IEC EMI FILTER

- RECEPTACLE

- PLUG

WIRE HARNESS

BREAKER

FUSE HOLDER

FUSE

ENCODER

INDICATOR

POTENTIOMETER

CONNECTOR

WATERPROOF CONNECTOR

WATERPROOF PARTS

PCBA

NEW PRODUCT



OUR PRODUCT

Home » Our Product » CW2A Series » CW2A Series

SOCKET / IEC EMI FILTER

CW2A Series
IEC60320 C14 Inlet, with EMI Filter,
Single or Twin Fuses, 3A, 6A or 10A
Rating in UL

Power entry module with EMI filter for electromagnetic protection
Approved by UL, CUL, CE & CQC
Standard C14 socket
Quick connect terminals
Mounted by screws



 ZOOM IN

PDF Download

Get Information

 [Print this page](#)

Feature



- Rated Voltage: 115V/250VAC
- Frequency: 50/60Hz
- Rated Current: 3A/6A/10A
- Operating Temp: -25~+85°C
- Dielectric strength: 1450VDC (line to line): 2250VDC(line to ground)/1 min.
- Max. Leakage Current line to ground:
 - 0.25mA 115VAC 60Hz
 - 0.45mA 250VAC 50Hz

Specification


How to order


PART/NO. □□:03,06,10(A)	CX (uF)	CY (pF)	R (MΩ)	Lg (μ F)	SCHEMATIC
CW2A-□□A-T(00)	0.1	3300			11
CW2A-□□A-T(01)			1.0		5
CW2A-□□A-T(02)				100	6
CW2A-□□A-T(03)		2200			5
CW2A-□□A-T(04)				100	6
CW2A-□□A-T(05)					

L(mH):01A:3.7 03A:1.8 06A:0.7 10A:0.3


Products Search

Search




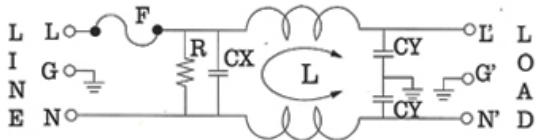

ELECTRICAL SCHEMATIC 5

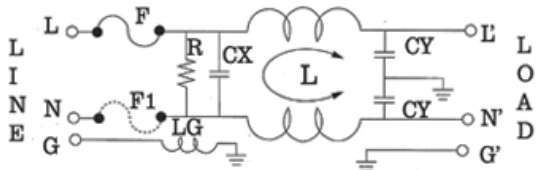

F1:optional fuse
ELECTRICAL SCHEMATIC 6

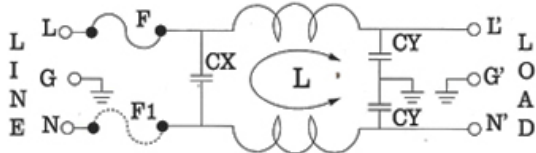


F1:optional fuse
ELECTRICAL SCHEMATIC 11

Min.Insertion Loss (dB) in 50 ohm system

Comm.Mode(L-G)in MHz							Diff.Mode(L-L)in MHz					
Amt	0.15	0.5	1	5	10	30	0.15	0.5	1	5	10	30
1A	34	38	40	32	28	11	9	25	37	68	62	15
3A	28	36	39	45	48	39	9	19	27	58	65	16
6A	19	29	36	49	53	39	8	18	25	57	60	32
10A	14	18	22	38	49	42	17	42	64	58	59	30

Item

Drawing

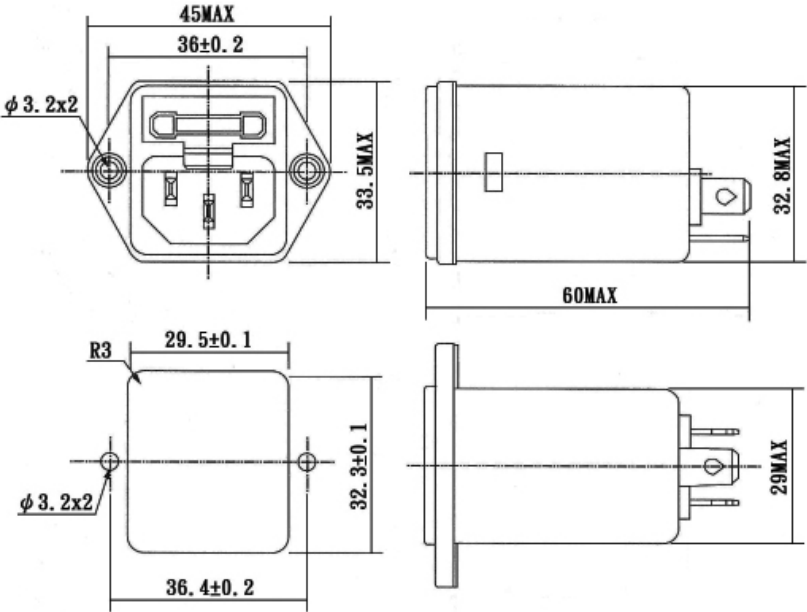

BACK

