零件图	成品图	客户图
		○

REVISION DATA

REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	Songjun	2020-09-28

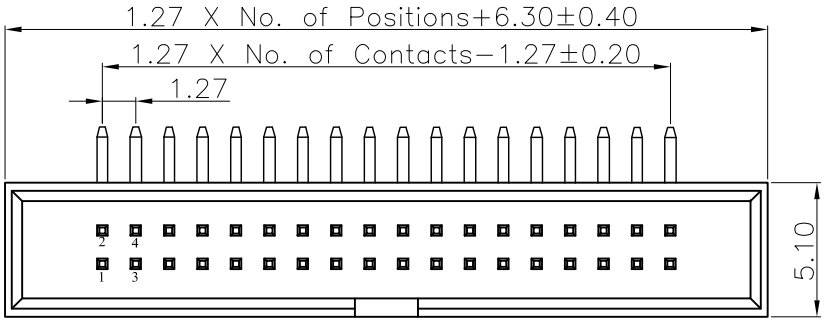

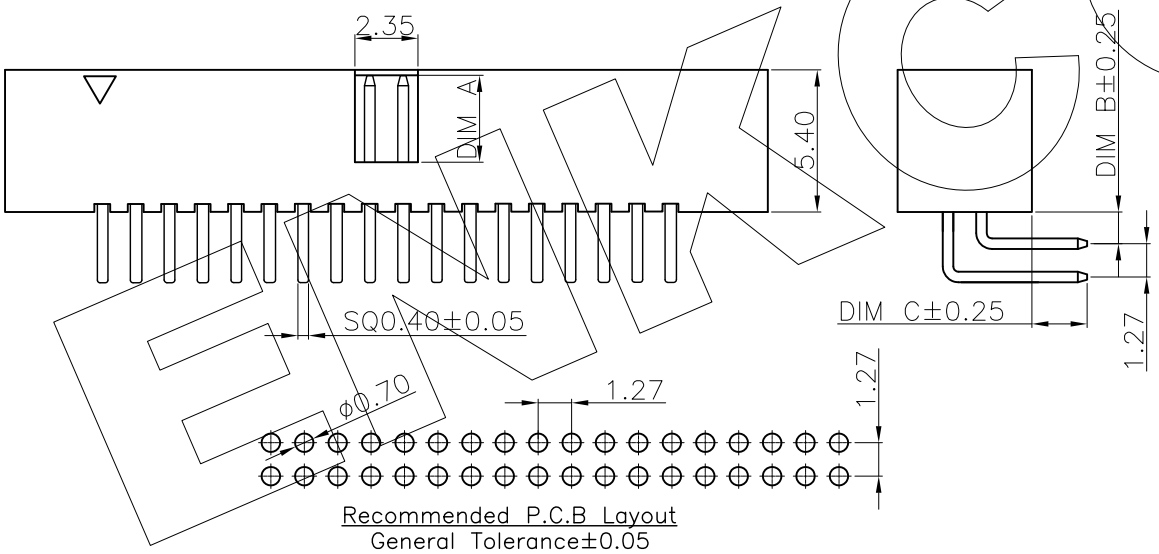

Technical Data

Material:
Contact Material: Brass
Contact plating:Au or Sn Over Ni
Insulator Material:Black Polyester UL94 V−0
Standard:PA6T+30%G/F.

Electrical:
Rating current:1.0Amps/contact max.
Rating voltage :100 V AC/DC
Contact resistance: ≤20mΩ/contact
Insulation resistance: ≥1000MΩ
Withstanding Voltage:500V AC/minute

Mechanical:
Mechanical life cycle:min.200
Operaing temperatures: Gold Plated:−55°C to+105°C
Tin plated:−40°C to+105°C
Soldering temperature:+260°C max(PA6T).

DIM A&B&C CAN BE CUSTOMIZED BY CUSTOMERS

BHF	XXX	12	R	XX	C	X	N	RXXX
HOUSING TYPE F PH1.27 H5.4	PIN No. No. of Positions XXX Positions	PRODUCT TYPE 12 Dual Row Single Base	ANGLE OPTIONS R 90° D 180° S SMT	PIN PLATING G0 Gold Flash G1 1u" Au G6 Au10u" S1 Sn+Au1u" S7 Sn+Au15u" S8 Sn+Au30u" T3 Matte Sn	INSULATOR MATERIAL C PA6T+30%GF	COLOR B BLACK W WHITE L BLUE G GREEN Y YELLOW R RED N NATURAL		PIN LENGTH L=XXXXmm

ENKCOM®
www.enkcom.com
TEL:+86(0)769 8904 9672
FAX:+86(0)769 8904 9671
E-MAIL:sales@anycom.tw

东莞市恩康电子科技有限公司
DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD

TOLERANCE		DATE :	2020-09-28	TITLE: PH2.54 H8.90 Double Row Straight Box Header			
ANGLE	±5°	DRAWN :	Songjun				
X.XXX	±0.15	CHECKED :		PART NO: BHFXXX12RXXCXNRXXX			
X.XX	±0.25	APPROVED :					
X.X	±0.38						
X.	±0.50	PROJECTON		REV: A0	UNIT: mm	SCALE: 1:1	SIZE: A4	PAGE: 1/1