
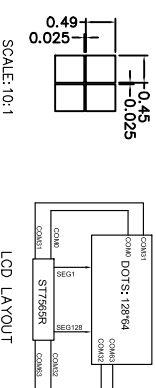


Customer approval :

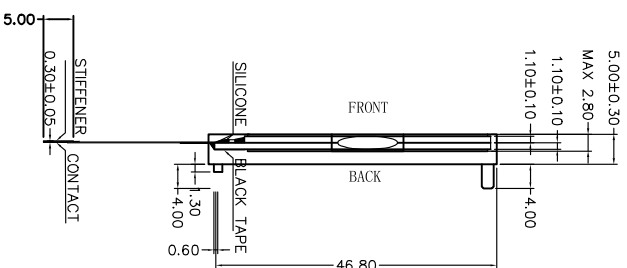

PIN	SYMBOL	PIN	SYMBOL
1	NC	19	C3+
2	NC	20	C1-
3	CS	21	C1+
4	RST	22	C2+
5	A0	23	C2-
6	WR	24	NC
7	RD	25	V4
8	D0	26	V3
9	D1	27	V2
10	D2	28	V1
11	D3	29	V0
12	D4	30	VR
13	D5	31	NC
14	D6	32	C86
15	D7	33	PS
16	VDD	34	NC
17	VSS	35	IRS
18	VOUT	36	NC

1. Display Mode: FSTN/Transmissive/Positive.
2. Viewing Angle: 6:00°clock.
3. Drive Method: 1/64 Duty, 1/9 Bias, Vop=9.0V, Vdd=3.3V.
4. Top: -10°C~+60°C, Tst: -20°C~+70°C.
5. Connector: COG+PFC.
6. Drive IC: ST7565R
7. Backlight: 4PCS GREEN LEDs, If=80mA & Vf=3.0±0.1V
8. With " * " Mark Dimensions are Important Dimensions.

REV	REVISION RECORD	DATE	 深圳市三元晶科技有限公司 ShenZhen TCCLCD HI-Tech Co., Ltd.					
A	FIRST ISSUE	2015/11/03						
B			MODEL NO. 模组型号	SYG12864G103-3C39GLN2R8B/MCF-1A052836		GENERAL TOL: 未注公差		± 0.3
C			APPROVED BY 审核	CHECKED BY 检查	DRAWING BY 绘图	PAGE: 页面 1 OF 1	UNIT: 单位:mm	
D			Liu 2015/11/03	Francis 2015/11/03	Luoxian 2015/11/03	PROJECTION 三角法		