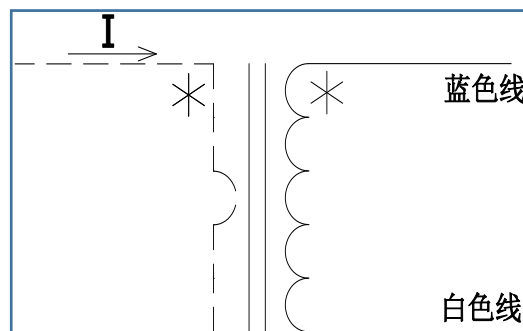
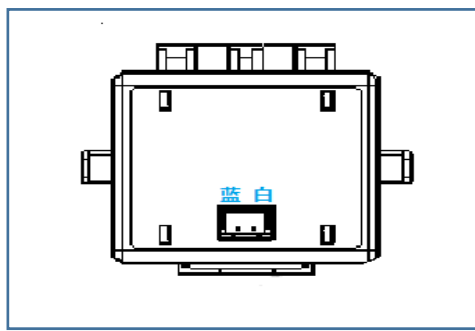
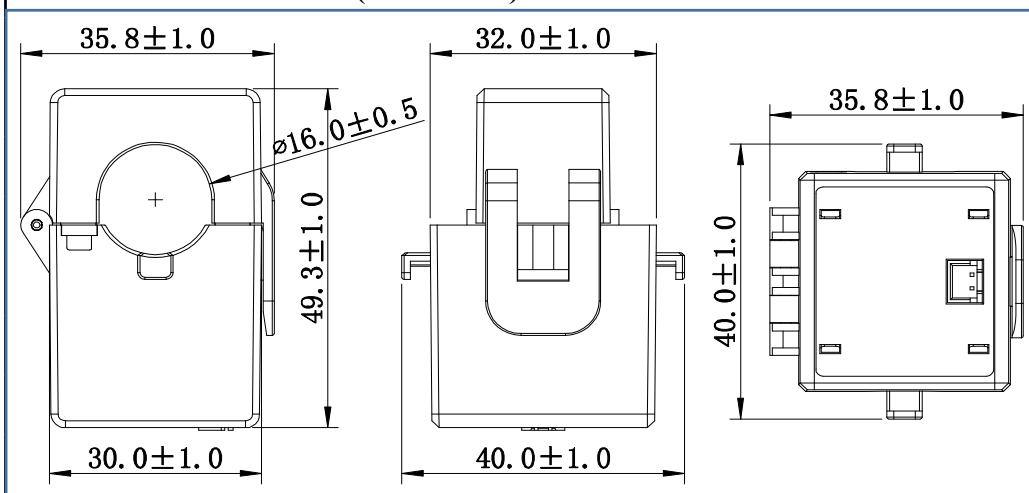


CUSTOMER		DESCRIPTION	电流互感器
----------	--	-------------	-------

OUTLINE DIMENSION(UNIT:mm):

ELECTRICAL CHARACTERISTIC:

NO.	ITEM	MEASURED POINT	TECHNICAL DATA	REMARK
1	Normal Primary Current	穿芯	100A	
2	Normal Secondary current	蓝色--白色	40mA	
3	Accuracy		0.20%	角差≤60'
4	Primary/secondary ratio	蓝色--白色	2500TS	
5	Load Resistance		≤30Ω	
6	DC Resistance	蓝色--白色	240 Ω MAX	at 25℃
7	Nominal working frequency		50-60Hz	
8	Operation Temperature		-20℃ to +50℃	
9	HI-POT	P-S	3000VAC 50Hz 1mA/10s	

 BELTA SHENZHEN BELTA TECHNOLOGY CO., LTD	DRAWN BY	CHECKED BY	VERIFIED BY	APPROVED BY	CUSTOMER P/N	CTF16T-2K5-100 100A/40mA
	苏孝芳	张传芝	王小川	邱方	MODEL	CTF16T
					DATE	2020/8/17
					REV. NO.	A
					PAGE	3 of 3