

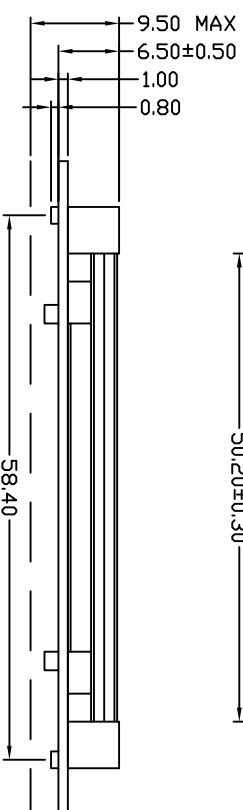


接口名	CN1	接口号	CN2
管脚号	管脚描述	管脚号	管脚描述
1	/CS1	1	/CS1
2	/RST	2	/RST
3	A0	3	A0
4	WR(RW)	4	WR(RW)
5	RD(E)	5	RD(E)
6	DB0	6	DB0
7	DB1	7	DB1
8	DB2	8	DB2
9	DB3	9	DB3
10	DB4	10	DB4
11	DB5	11	DB5
12	DB6(SCL)	12	DB6(SCL)
13	DB7(SI)	13	DB7(SI)
14	VDD	14	VDD
15	VSS	15	VSS
16	C86	16	C86
17	P/S	17	P/S
18	LED(+)	18	LED(+)

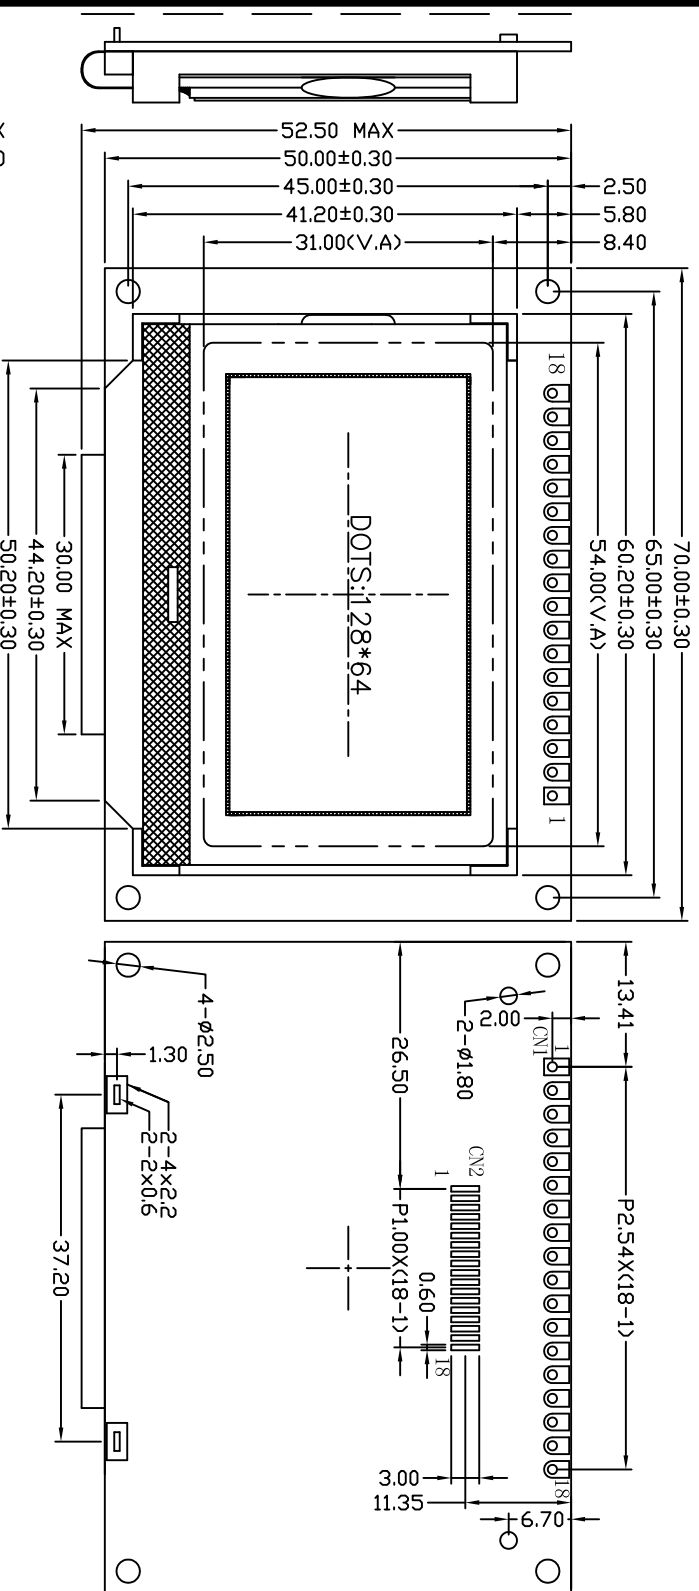

DETAIL DOTS

- ### 技术要求:

- 1.显示模式: FSTN
- 2.视角: 6点钟
- 3.偏光片类型: 半透/正性(白底)
- 4.工作温度: -20℃--+70℃
- 5.储存温度: -30℃--+80℃
- 6.工作电压: +3.3V
- 7.驱动模式: 1/64D;1/9B
- 8.背光类型: LED(白光;+3.3V)
- 9.备注公差: $\pm 0.2\text{mm}/\pm 0.5^\circ$



Shenzhen Goodview Electronic Technology Co., Ltd

[illegible]