
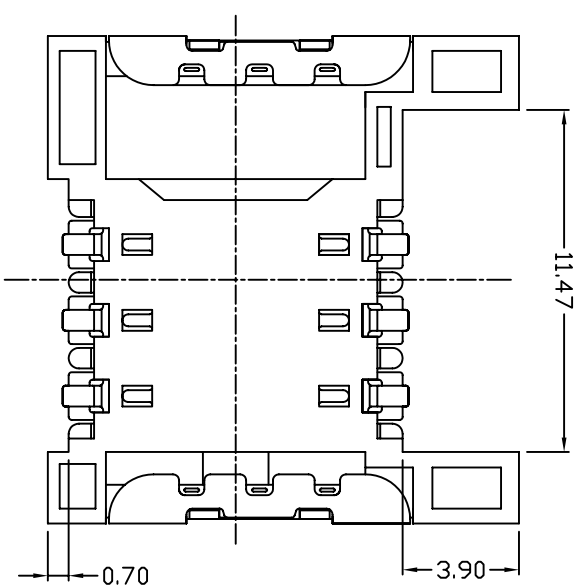


SPECIFICATIONS

Current Rating: 3 Amps
Insulator body: LCP
Insulator Resistance: 5000M Ω Min
Dielectric Withstanding: DC 500V
Contact Resistance: 20M Ω Max
Durability: 100gf Cycles Min
Contact Material: Copper alloy
Finish : Tin Gold or Duplex plated
Standard: Gold flash all over Nickel
Operating Temperature: -55° C+105° C
Contact plating: 5Au

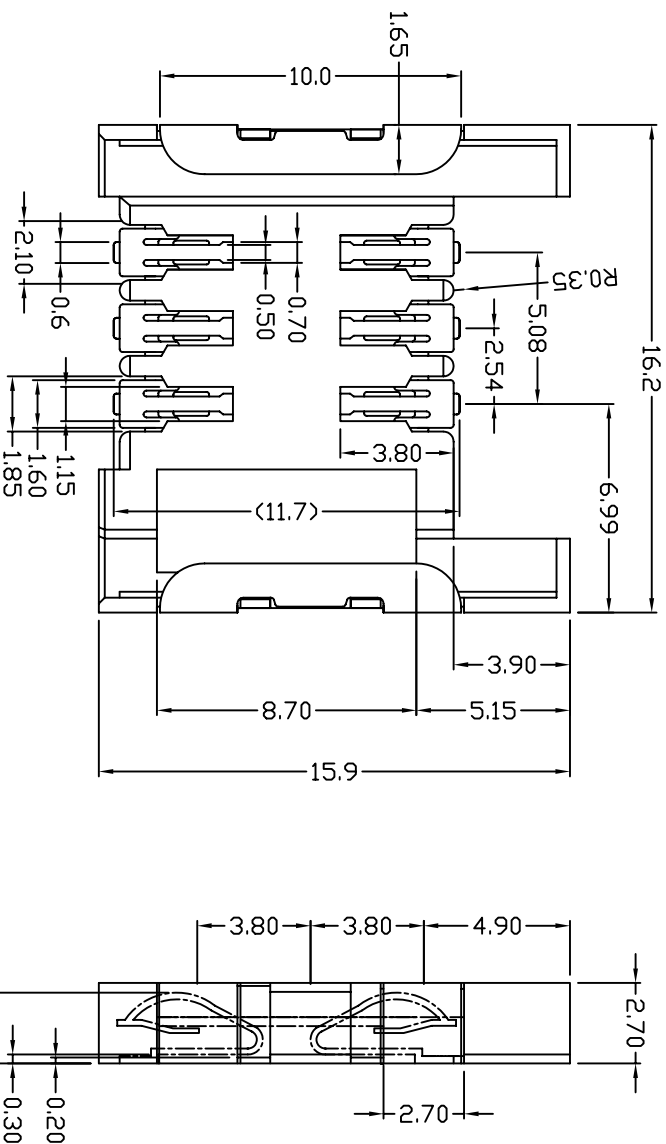

UNLESS OTHERWISE
SPECIFIED TOLERANCE

ANG
 $\pm 5^\circ$
0
0.0
0.00

± 0.3
 ± 0.15
 ± 0.05

SCALE

UNIT

DRAWN

mm

CHECKED

APPROVED

/



SIZE
A4

REV
A

深圳市锦凌电子有限公司

电话: 86-0755-2997-5806

传真: 86-0755-2997-5992

DRAWN NAME

SIM卡 6Pin 短卡座

PROUCT NO.

654006MS0BA02

PILE NAME: