



Category

SWITCH

- MICRO/DETECTOR SW
- ROCKER SW
- PUSH SW
- TOGGLE SW
- ANTI-VANDAL SW
- CAPACITANCE SW
- SLIDE SW
- PRESSURE SW
- ROTARY SW
- DIP SW
- TACT SW
- LIGHTED TACT SW
- KEYLOCK SW
- SAFETY & CONTROL SW
- VEHICLE SW

SOCKET

WIRE HARNESS

BREAKER

FUSE HOLDER

FUSE

ENCODER

INDICATOR

CONNECTOR

WATERPROOF CONNECTOR

WATERPROOF PARTS

NEW PRODUCT

Products Search

Search



OUR PRODUCT

Home ▶ Our Product ▶ S-14 SERIES ▶ S-14 SERIES

SWITCH / MICRO/DETECTOR SW

S-14 SERIES
General-Purpose Micro Switches SPDT,
with Phenolic Housing for High Temp
Application, 25A 125/250VAC

SPDT, SPST NO, SPST NC, General Purpose Micro
Switches for Industrial Applications
Different Lever or Roller Actuator Available
Consult the Factory for Optional High Temp Applications
up to 200°C

PDF Download

Get Information

Print this page



ZOOM IN

Feature



SPECIFICATIONS

- 25A 125/250VAC (UL,CUL,CCC,CE)
- 1HP 125VAC, 2HP 250VAC (UL,CUL,CCC,CE)
- Temperature rating: 105°C standard (150°C & 200°C optional)
- Flammability rating: UL94V-0
- Case: Phenolic
- Actuating Button: Thermoplastic Nylon
- Terminals: Silver-Plated Brass
- Moving Blade: Silver-Plated Beryllium Copper
- Spring: Stainless Steel
- Auxiliary Actuators: Cold-Rolled Steel (Nickel-Plated)
- Roller: Sintered Stainless Steel
- Contacts: Silver-Cadmium Oxide


FEATURES

- Safety approved internationally by UL,CUL,CCC,CE
- HP rating up to 2HP 250VAC
- Choice of actuator styles
- Solder, quick-connect and optional screw terminal
- 3 contact arrangements
- Long-life coil spring mechanism
- High-temperature up to 150°C & 200°C
- SPDT, SPST NO, SPST NC is available upon request
- 30A model available on request


Item




S-14E

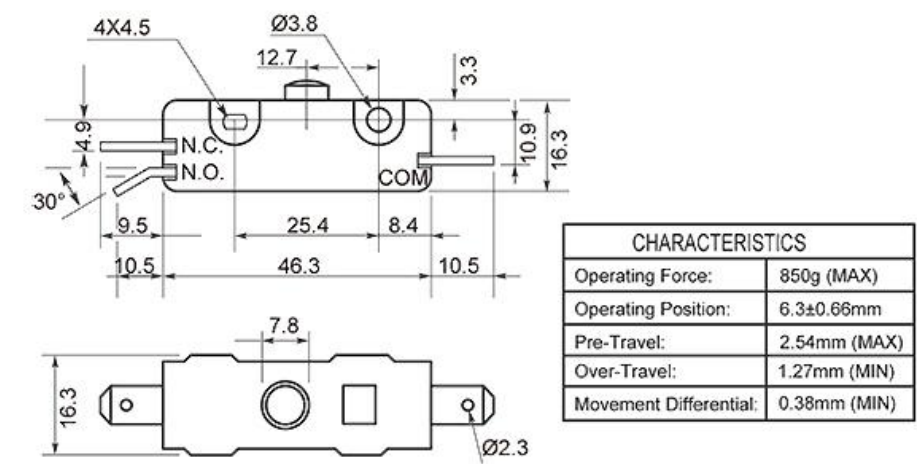

S-14E1

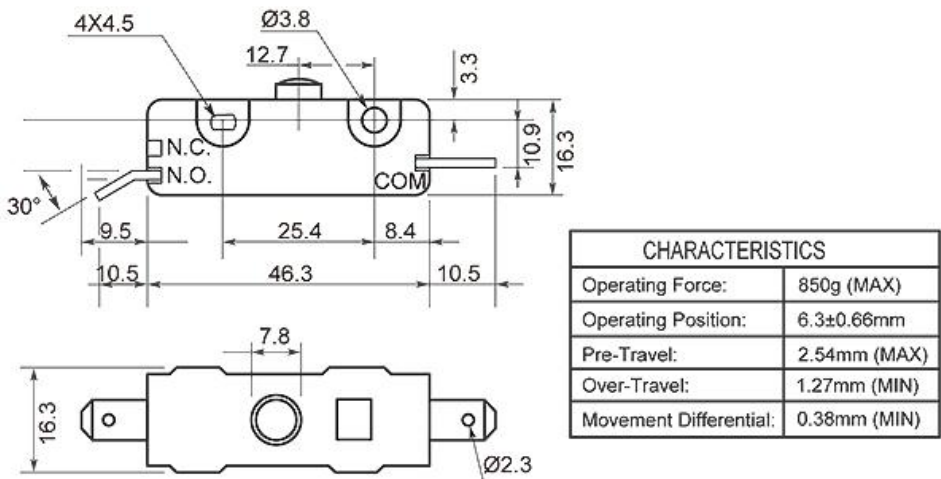

S-14J2

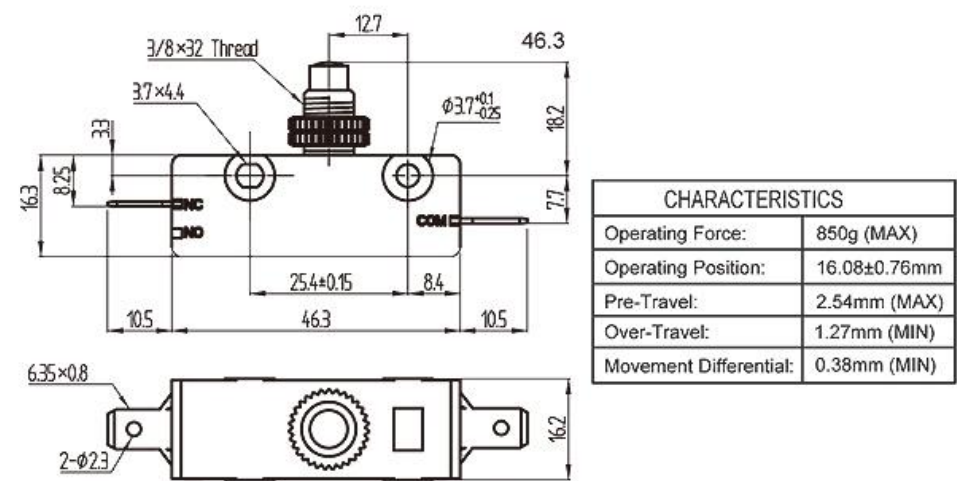

BACK



5F., No.10, Lane 218, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, R. O. C.
Tel: +886-2-29161263 Fax: +886-2-29117574 canal@c-components.com.tw

©2009 Canal Components Inc. All Rights Reserved