



Category

SWITCH

SOCKET

- INLET

- OUTLET

- IEC EMI FILTER

RECEPTACI F

- PLUG

INDICATOR

SENSOR

ELECTRO-MODULE

BREAKER

FUSE HOLDER

FUSE

ENCODER


POTENTIOMETER

CONNECTOR

WIRE HARNESS

NEW PRODUCT

Products Search

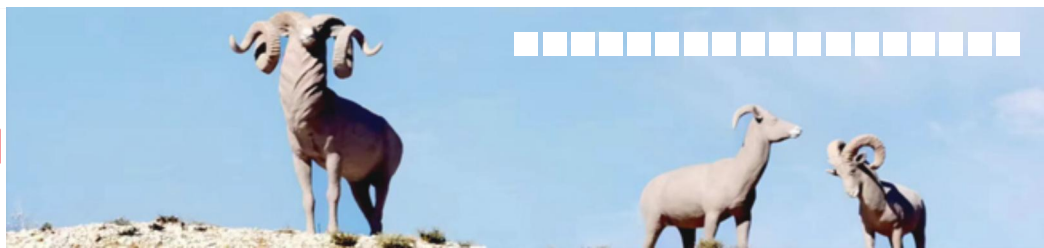

OUR PRODUCT

[Home](#) ▶ [Our Product](#) ▶ [KS-607](#) ▶ [KS-607](#)

SOCKET / INLET

KS-607

Multi-Fuction Socket, up to 15A 250VAC power inlet with mini rocker switch

IEC 60320 AC power inlet with switch

C14 inlet up to 15A 250VAC

Screw mounting

Solder lug or quick connect terminals.

 ZOOM IN

Feature




- 15A 250VAC (UL, CUL)
- 10A 250VAC (ENEC)
- 10A 250VAC (CCC Pending)
- Meet EN60320 requirements
- Insulation resistance : 100M Ω (min.), DC 500V
- Dielectric Strength : 2000Vac for 1 minute
- Housing: PBT, PA66 or PC, UL rated 94V-2 min
- Temperature range : -20°C~ 85°C
- Terminals: Tin-plated brass
- Switch size: for 6.8*19mm mini rocker switch with SPST, SPDT circuit

* For detailed specifications of the switch, please link to the following product website:

- MR-H
- MR3-H

Specification



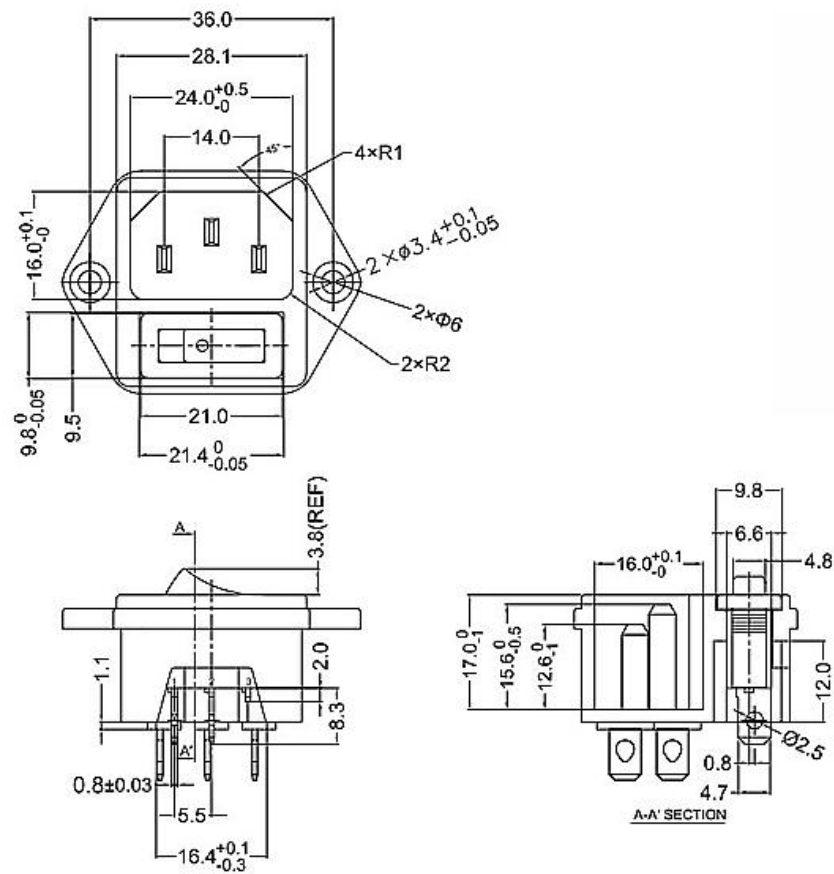

KS-607-1-A1

◀ BACK



5F., No.10, Lane 218, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, R. O. C.

Tel: +886-2-29161263 Fax: +886-2-29117574 canal@c-components.com.tw

©2009 Canal Components Inc. All Rights Reserved