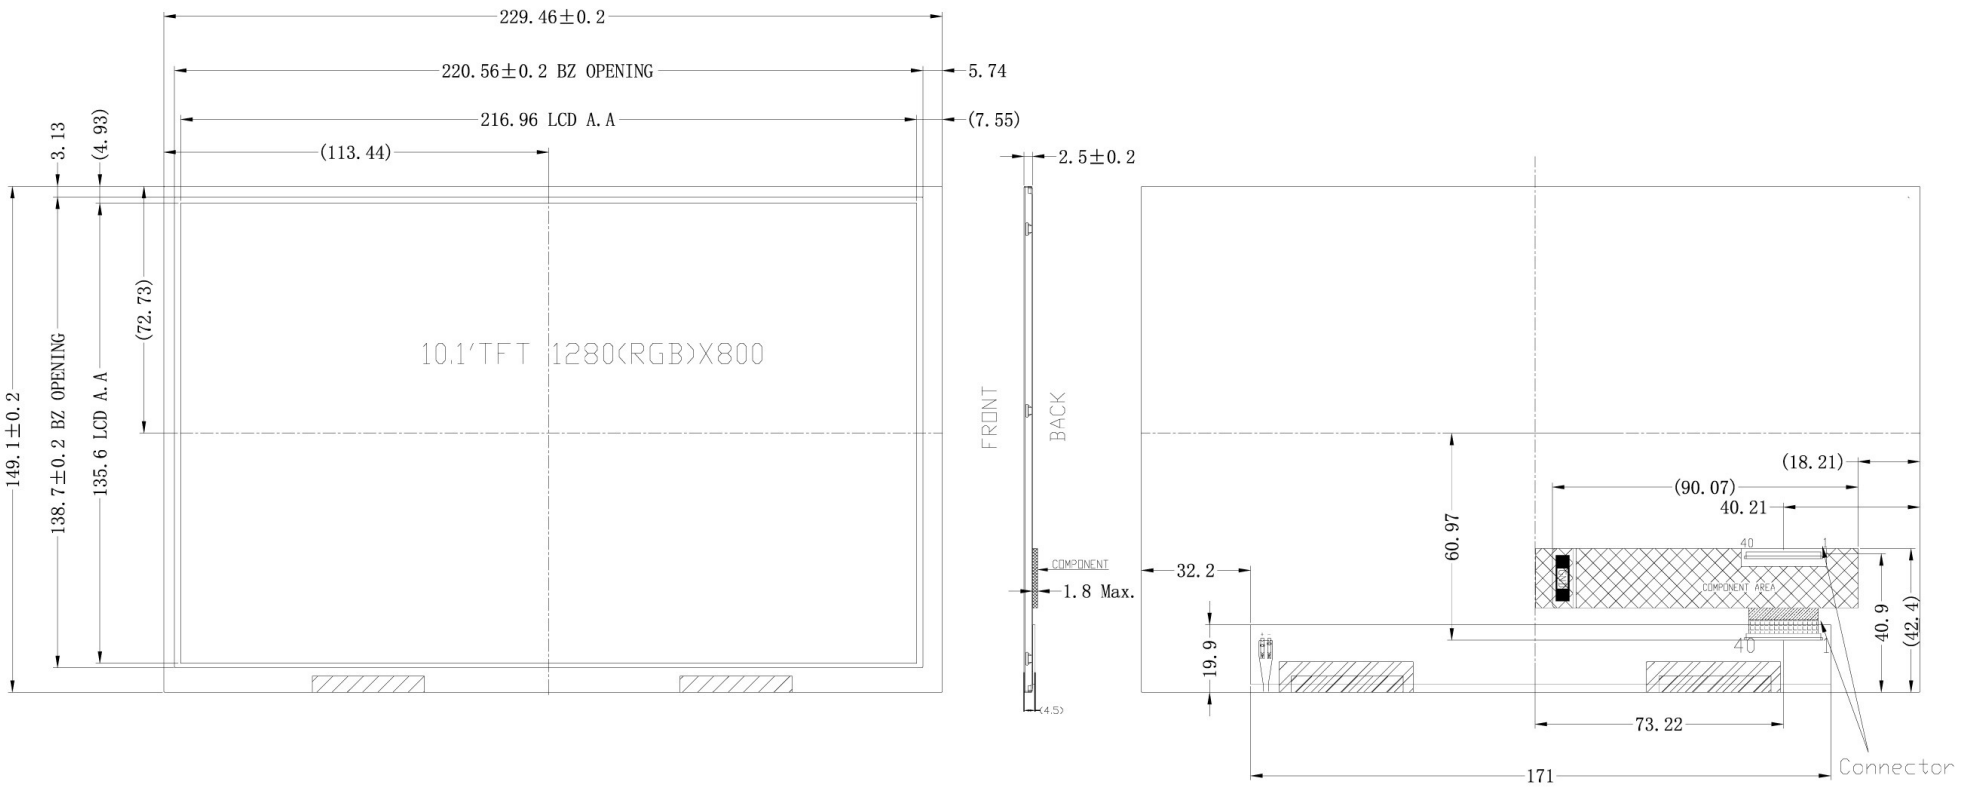

PIN FUCTION	
PIN	SYMBOL
1	NC
2	VDD(3.3V)
3	VDD(3.3V)
4	NC
5	NC
6	NC
7	NC
8	Rxin0-
9	Rxin0+
10	VSS
11	Rxin1-
12	Rxin1+
13	VSS
14	Rxin2-
15	Rxin2+
16	VSS
17	RxCLK-
18	RxCLK+
19	VSS
20	Rxin3-
21	Rxin3+
22	VSS
23	LED_GND
24	LED_GND
25	LED_GND
26	NC
27	LED_PWM
28	NC
29	CABC_EN
30	NC
31	LED_VCSS(5.0V)
32	LED_VCSS(5.0V)
33	LED_VCSS(5.0V)
34	NC
35	NC
36	NC
37	NC
38	NC
39	NC
40	NC

NOTES:

1. DISPLAY TYPE: 10.1 IPS TFT
2. VIEWING DIRECTION: ALL
3. DISPLAY MODE: TRANSMISSIVE/NORMALLY BLACK
4. OPERATING TEMP.: -10°C-+50°C
5. STORAGE TEMP.: -20°C-+60°C
6. CONNECTOR: F62240-H1210A
7. UNMARKED TOLERANCE: ±0.2
8. RoHS Complicant

精进光电 JINGJIN	东莞市精进光电有限公司 Jingjin Optoelectronics Co., Ltd.		
DRAWN		UNIT	Customer NO.
		mm	
CHECKED	SCALE	NO.	Part NO. JTA1010ZLD1
	1:1	1/1	
APPROVED	DATE	VERSION	TITLE OUTLINE