


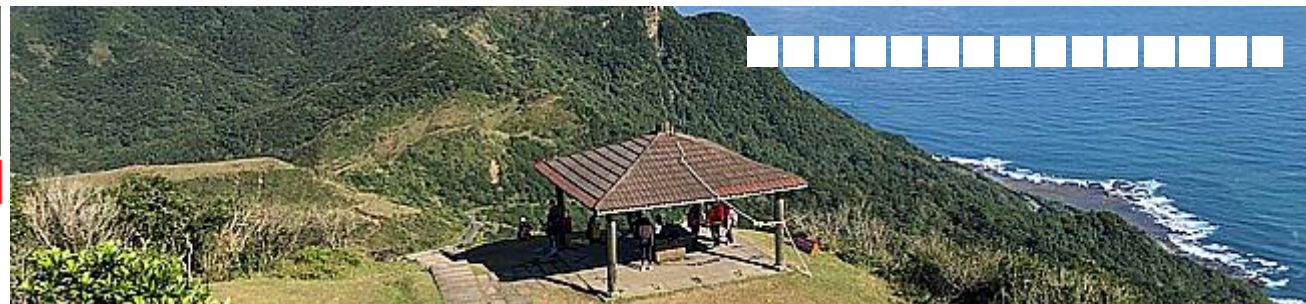

Category

[SWITCH](#)
[SOCKET](#)
[- INLET](#)
[- OUTLET](#)
[- IEC EMI FILTER](#)
[- RECEPTACLE](#)
[- PLUG](#)
[INDICATOR](#)
[SENSOR](#)
[ELECTRO-MODULE](#)
[BREAKER](#)
[FUSE HOLDER](#)
[FUSE](#)
[ENCODER](#)
[POTENTIOMETER](#)
[CONNECTOR](#)
[WIRE HARNESS](#)
[BUZZER](#)
[NEW PRODUCT](#)


OUR PRODUCT

[Home](#) ▶ [Our Product](#) ▶ [VK Series](#) ▶ [VK Series](#)

SOCKET / INLET

VK Series Multi-function Socket, Power Inlet with Fuse Holder or Switch


EN60320 C14 Inlet with rocker switch and single fuse holder

Approved by UL, CUL, VDE/ENEC & CCC

C14 inlet up to 10A 250VAC

Snap-in or screw mounting

Solder or quick connect terminals

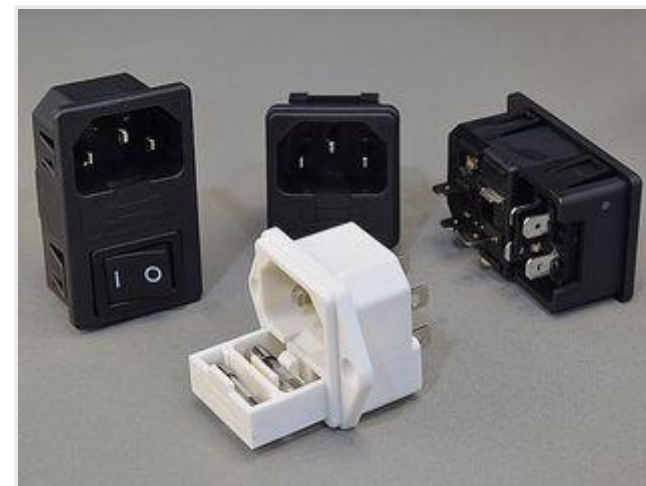[PDF Download](#)
[Get Information](#)
[Print this page](#)


ZOOM IN

Feature



Products Search

Search



- 10A 250VAC (UL, CUL)
- 10A 250VAC (VDE/ENEC, CCC)
- Fuse holder: 1x 2,5 W / 10 A 250VAC (VDE/ENEC)
- Insulation resistance: 100M Ohms min, DC 500V
- Dielectric strength: 1,500VAC for 1 minute
- AC power inlet C14 according to IEC/EN 60320
- Fuse holder according to IEC/EN 60127
- Fuse holder spec: for 5*20mm fuse
- Quick-connect or solder terminals
- Snap-in or screw mounting

Specification

How to order



VK — 2 0 0 — N B — X

SOCKET TYPE	FUSE HOLDER	TERMINAL	MOUNTING TYPE	BASE COLOR	SUFFIXES
2 2 IN 1 (C14 Inlet + Fuse Holder)	0 NO FUSE 1 FUSE	0 Q. C. 1 SOLDER	N SNAP IN S SCREW	B BLACK W WHITE	
3 3 IN 1 (C14 Inlet + Fuse Holder + Switch Bracket)					


Item



VK-210-NB

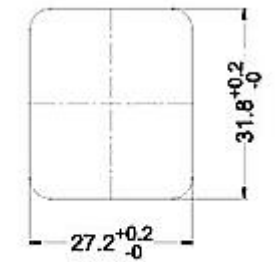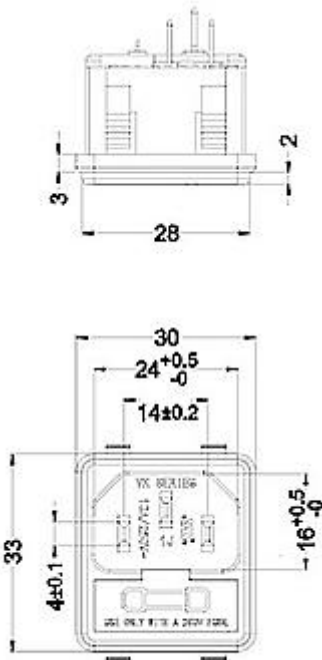


PANEL CUT-OUT

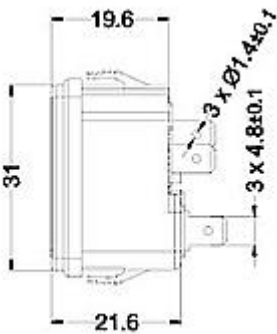




VK-211-SW

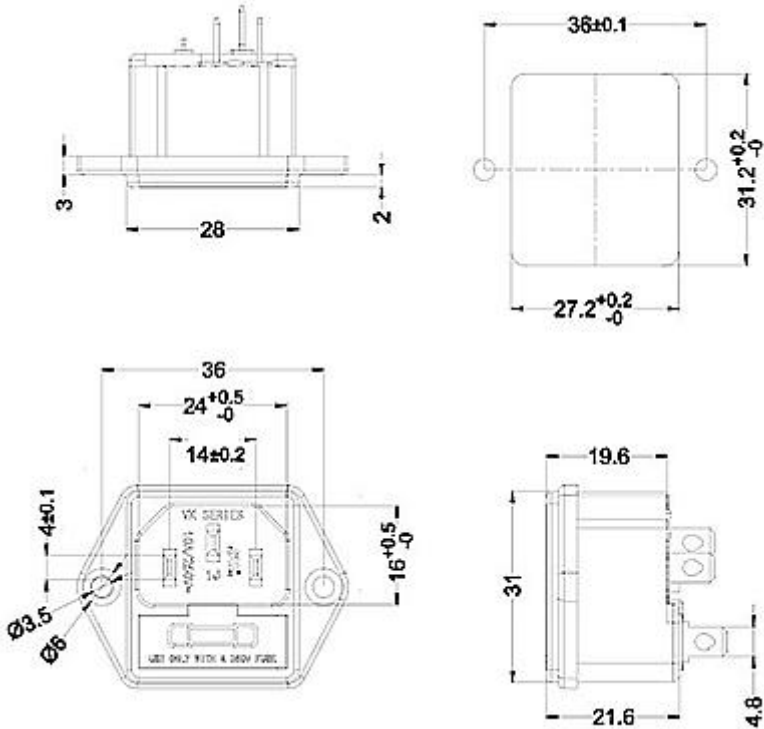


VK-301-NB-106

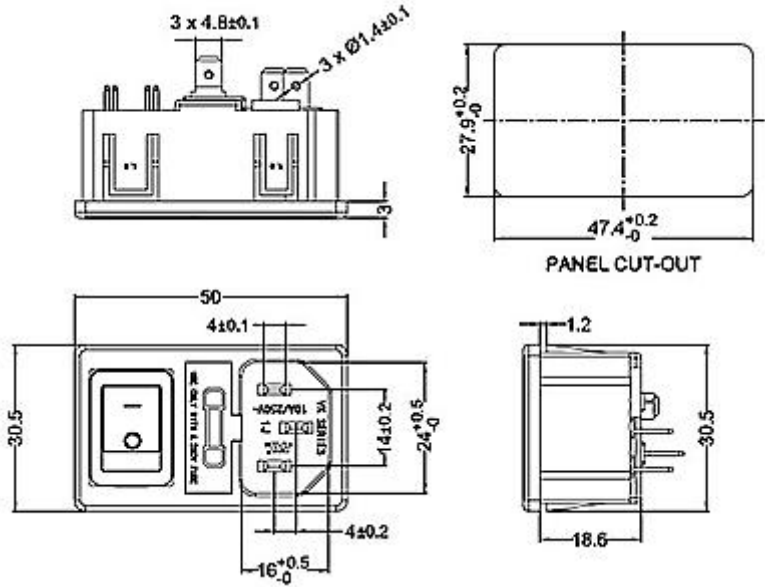



VK-301-SW-105

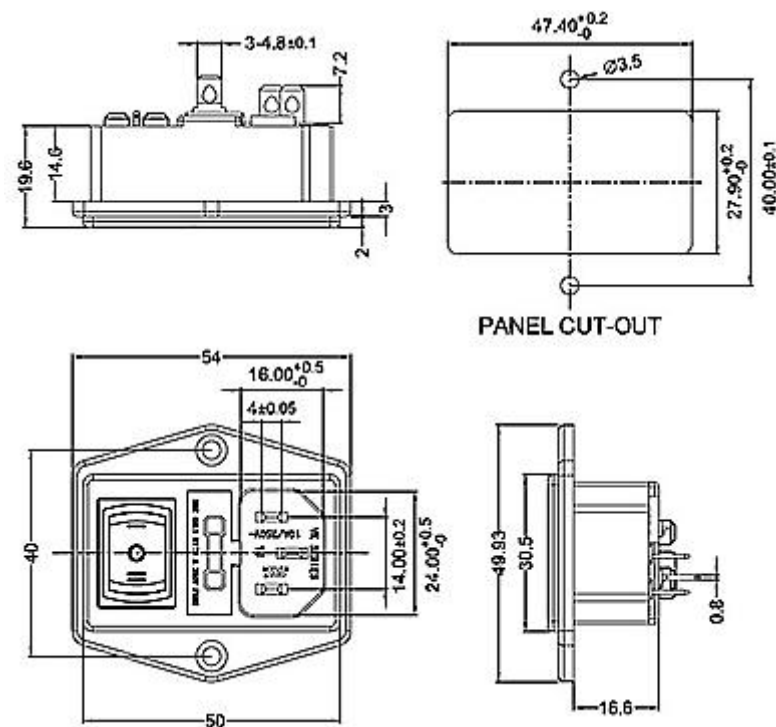

◀ BACK



5F., No.10, Lane 218, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, R. O. C.

Tel: +886-2-29161263 Fax: +886-2-29117574 canal@c-components.com.tw

©2009 Canal Components Inc. All Rights Reserved