

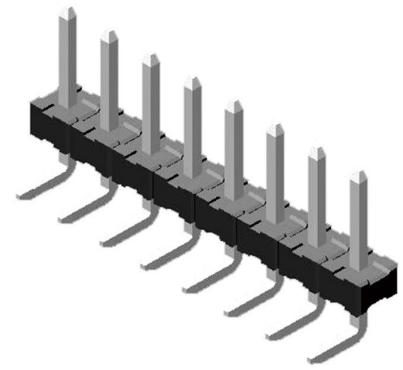
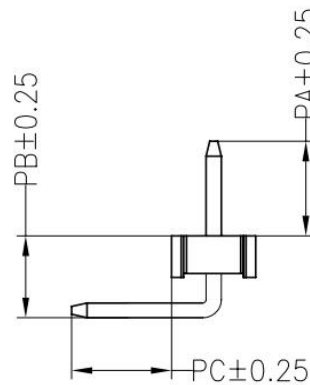
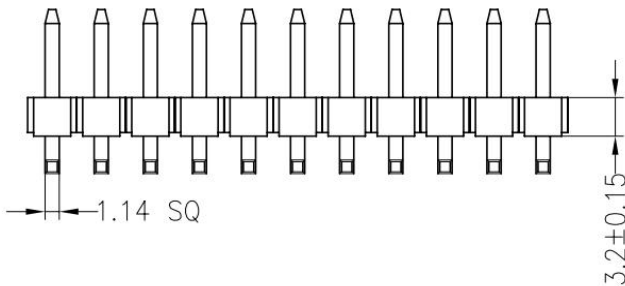


SPECIFICATIONS:

Rated Current	5.0AMP
Contact Resistance	20mΩ Max
Withstand Voltage	500V AC/DC
Insulation Resistance	1000mΩ Min
Operation Temperature	- 40°C to +105°C
Contact Material	Brass
Contact Plating	Au over Ni
Insulator Material	LCP
Max. Processing Temp:	230°C for 30-60 seconds 260°C for 10 seconds

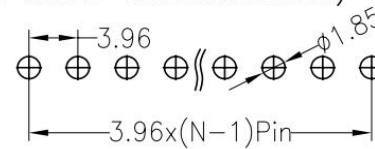

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

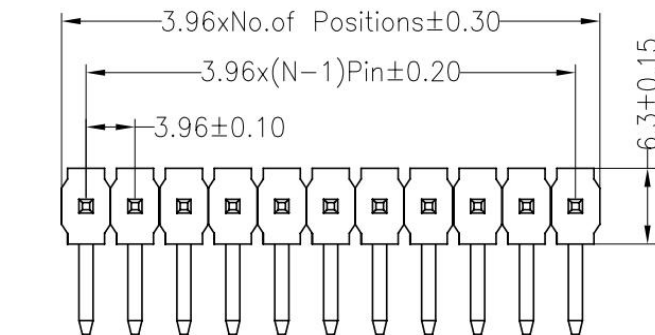

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	8.00	6.50	3.50	20.3
Alternate				

Ordering Information

HC Series	No. of Pin Per Row	Insulator Option	N	Plating	Type	PIN Length	Packing	End code
HC-PH33211 3.96mm Pin Header	1x02P	F=LCP		G0=Gold Flash	R=Right Angle	XXX	0=PE Bag	01
	1x20P			SN=Tin Plated			A=Tray	
				SM=Matted Tin			T=Tube	
							P=Tube+Cap	
							R=Reel+Cap	
							M=Reel+Mylar	
							X=Special	