
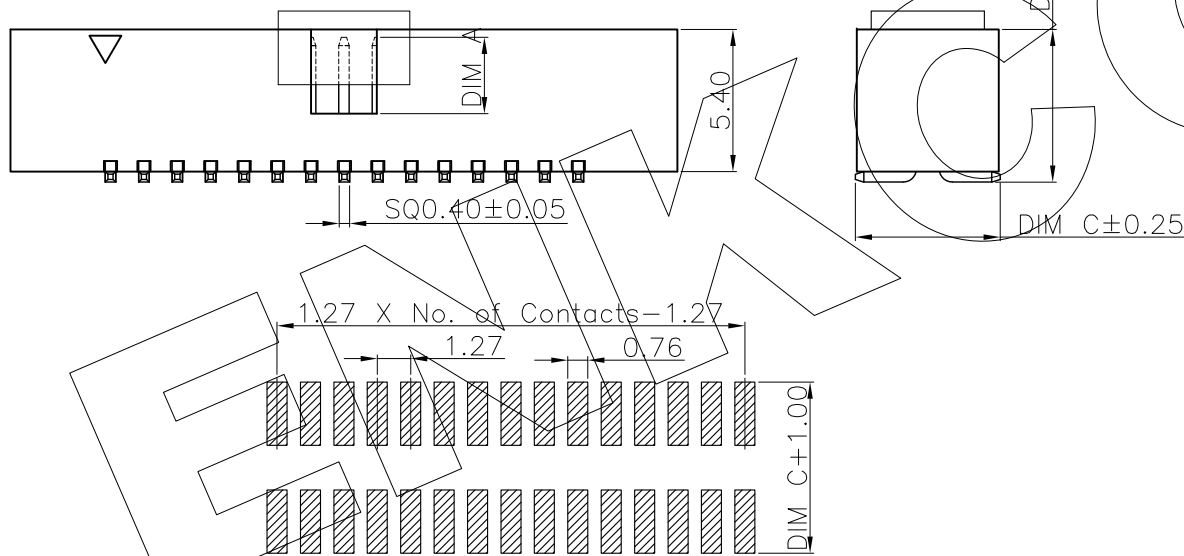


零件图	成品图	客户图
		○

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	Songjun	2020-09-28

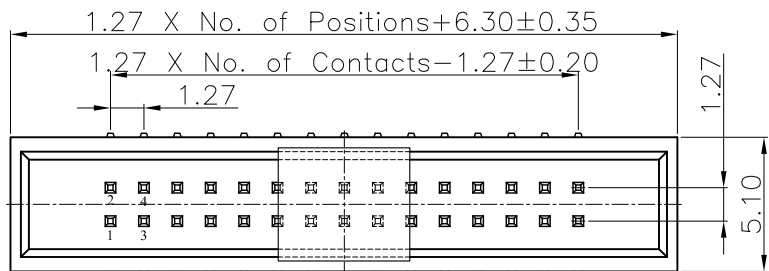

Recommended P.C.B Layout
General Tolerance±0.05

BHF	XXX	12	S	XX	C	X	N	SXXX
HOUSING TYPE F PH1,27 H5,4	PIN No. No. of Positions XXX Positions	PRODUCT TYPE 12 Dual Row Single Base	ANGLE OPTIONS R 90° D 180° S SMT	PIN PLATING G0 Gold Flash G1 1u" Au G6 Au10u" S1 Sn+Au1u" S7 Sn+Au15u" S8 Sn+Au30u" T3 Matte Sn	INSULATOR MATERIAL C PA6T+30%GF	COLOR B BLACK W WHITE L BLUE G GREEN Y YELLOW R RED N NATURAL		PIN LENGTH L=XXXXmm

Technical Data

Material:
Contact Material: Brass
Contact plating: Au or Sn Over Ni
Insulator Material: Black Polyester UL94 V-0
Standard: PA6T+30%G/F.

Electrical:
Rating current: 1.0Amps/contact max.
Rating voltage : 100 V AC/DC
Contact resistance: ≤20mΩ/contact
Insulation resistance: ≥1000MΩ
Withstanding Voltage: 500V AC/minute

Mechanical:
Mechanical life cycle: min.200
Operating temperatures: Gold Plated: -55°C to +105°C
Tin plated: -40°C to +105°C
Soldering temperature: +260°C max (PA6T).

DIM A&B&C CAN BE CUSTOMIZED BY CUSTOMERS

ENKCOM® www.enkcom.com TEL: +86(0)769 8904 9672 FAX: +86(0)769 8904 9671 E-MAIL: sales@anycom.tw					东莞市恩康电子科技有限公司 DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD				
TOLERANCE ANGLE ±5° X.XXX ±0.15 X.XX ±0.25 X.X ±0.38 X. ±0.50	DATE :	2020-09-28	TITLE:			PH2.54 H8.90 Double Row Straight Box Header			
	DRAWN :	Songjun	CHECKED :			PART NO: BHFXXX12SXXCXNSXXX			
	APPROVED :		PROJECTON			REV: A0	UNIT: mm	SCALE: 1:1	SIZE: A4
									PAGE: 1/1