

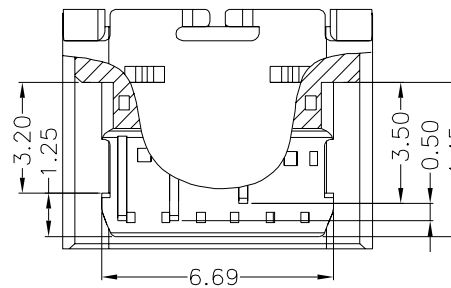
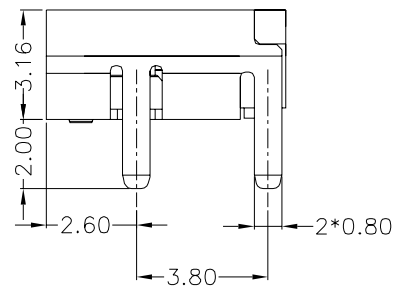
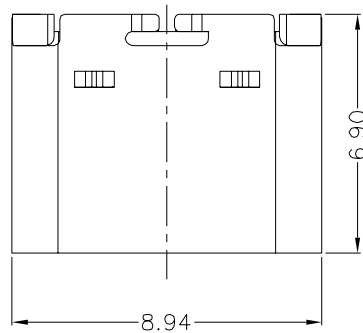
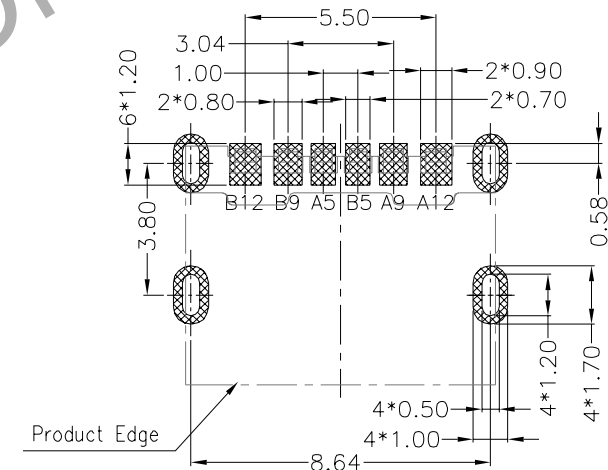
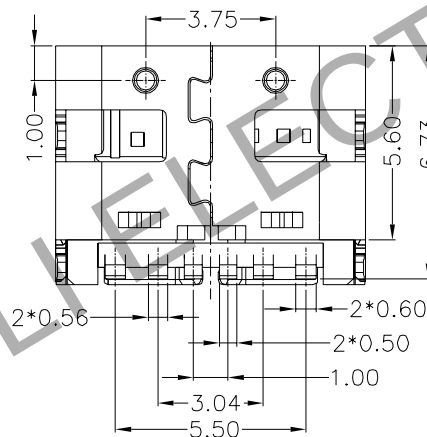


A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

Pin Assignments And Mating Sequence:

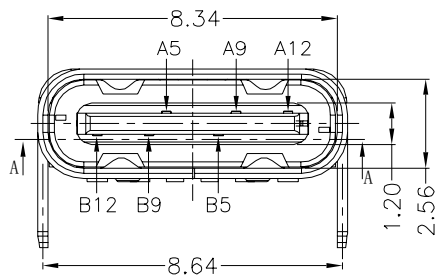

SECTION A-A

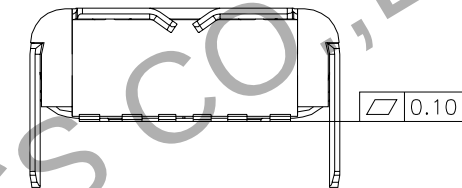

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: $-30\text{ }^{\circ}\text{C} \sim 85\text{ }^{\circ}\text{C}$
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:10000 CYCLES

8					TOLERANCE UNLESS SPECIFIED					
7					WITHIN 1.5: $\pm 0.1\text{mm}$ OVER 1.5: $\pm 0.2\text{mm}$ ANGLES: $\pm 2^{\circ}$					
6						ISSUE	DATE	DESCRIPTIONS	APPD.	
5										
4										
3	TERMINAL/CONTACT	BRONZE	6	Ni UNDER PLATED OVERALL, GOLD PLATED AT CONTACT AREA, GOLD PLATED AT TERMINATION	TITLE: USB 2.0 TYPE-C FEMALE	UNIT: mm		DRWG. NO:		
2	HOUSING	LCP	1	BLACK	MODEL NO: USB-20C-F-06	SCALE: 4:1		DWN		
1	SHELL	STAINLESS STEEL	1	Ni PLATED OVERALL, TAP WITH GOLD PLATED	DONGGUAN JINBAOLI ELECTRONICS CO.,LTD		CHK'D			
NO.	DESCRIPTION	MATERIAL	QTY	PLATING			APPD.			