
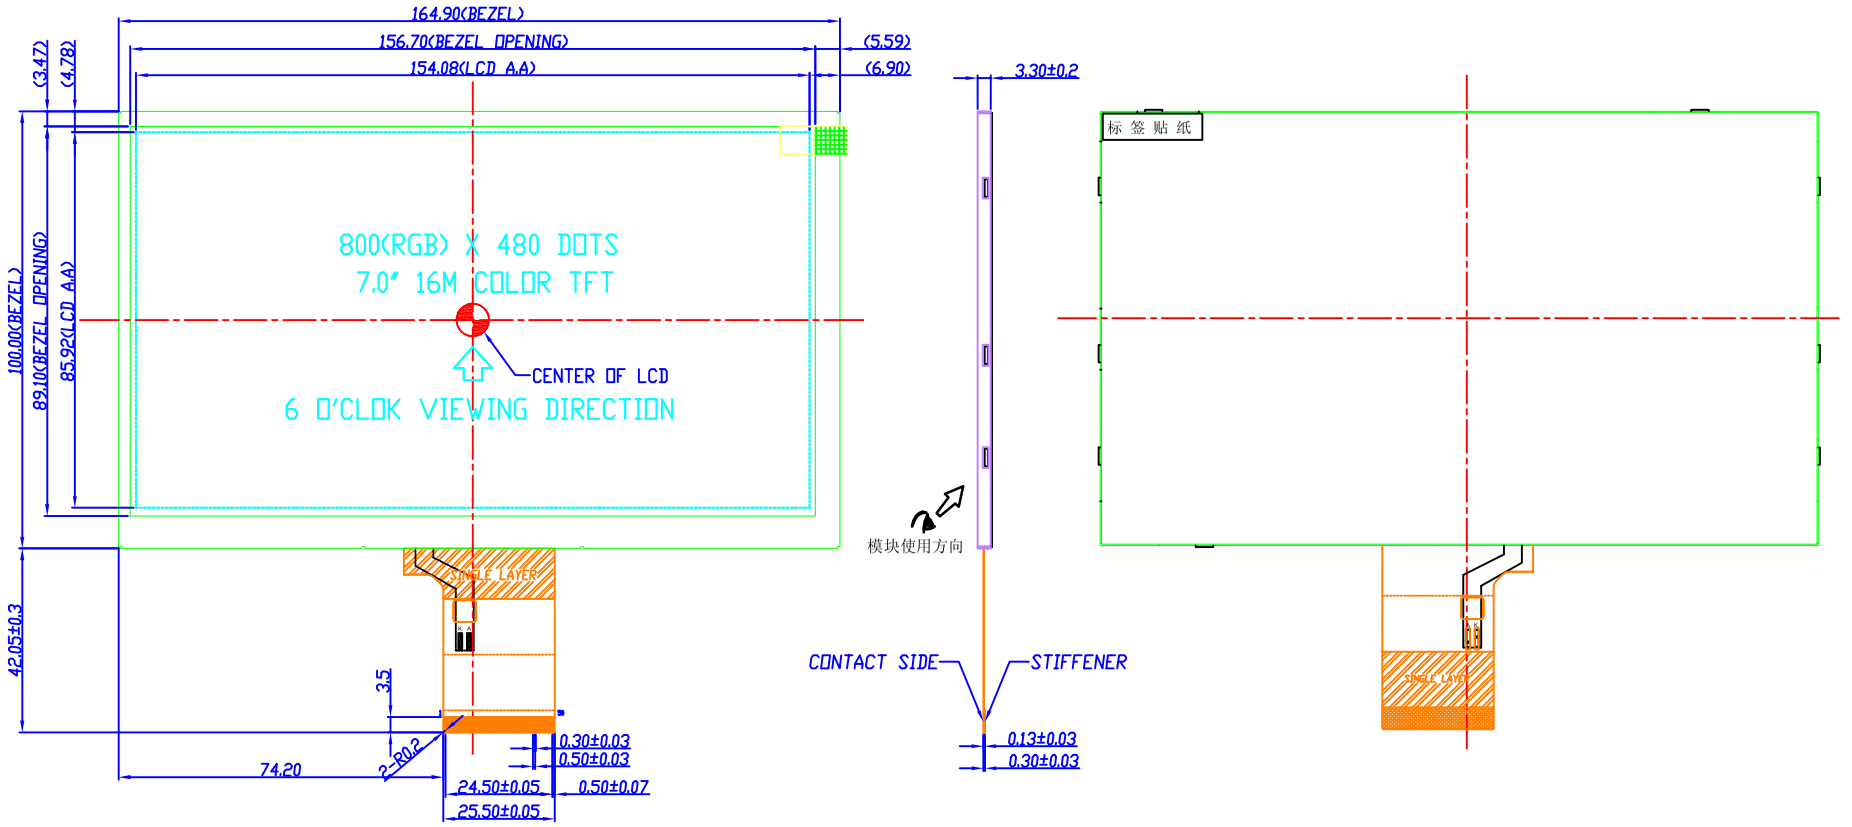


PIN	SYMBOL
1	VLED+
2	VLED+
3	VLED-
4	VLED-
5	GND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VS
11	HS
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DCLK
38	GND
39	L/R
40	U/D
41	VGH
42	VGL
43	AVDD
44	RESET
45	NC
46	VCOM
47	ITHB
48	GND
49	NC
50	NC

Notes:
1. "*" IS CRITICAL DIMENSION.
2. "()" IS REFERENCE DIMENSION.
3. PRODUCT CONFORM TO Rohs STANDARD.
4. 建议外壳可视区域比模块可视区域VAmds单边小0.3mm,并保证在AA区之间.

DISPLAY TYPE	7.0" a-Si Transmistive, NW TFT, 16.7M
DISPLAY RESOLUTION	800*480 DOTS
VIEWING DIRECTION	6 O'clock
LCD DRIVER IC	-
POWER SUPPLY	VCI=3.0~3.6V
INTERFACE	24bit Paralell RGB
CONNECTOR	-
BACK-LIGHT	3 LEDs Serial*6ways(Vf=9.6V)
OPERATION TEMPERATURE	-20° C ~ +70° C
STORAGE TEMPERATURE	-30° C ~ +80° C

CIRCUIT DIAGRAM (LED 3X6=18 dies)



ISSUE	AMENDMENT	NAME	DATE
0	新版发行	LONG	2014-12-12

TOLERANCE UNLESS OTHERWISE SPECIFIED: LINER: X.x ±0.3, X.xx ±0.2
DIMENSIONS IN: MM | SIZE: A4 | ANGLE: 0.1°
MATERIAL: PART MATERIAL | THICKNESS:1.6±0.2MM
SCALE: DRAWING SCALE | FINISH:FINISHED | THIRD PROJECT ANGLE


	SIGN	DATE
DRAWN		
CHECKED		
APPROVED		

三圆科技有限公司
SANYUAN TECHNOLOGY CO.,LTD


TITLE: MODULE_SPECIFICATION

ITEM NO.:MS-Y70001B00N | REV.: C
DWG NO.:MS-Y70001B00N.DWG | SHEET:1/1

正面

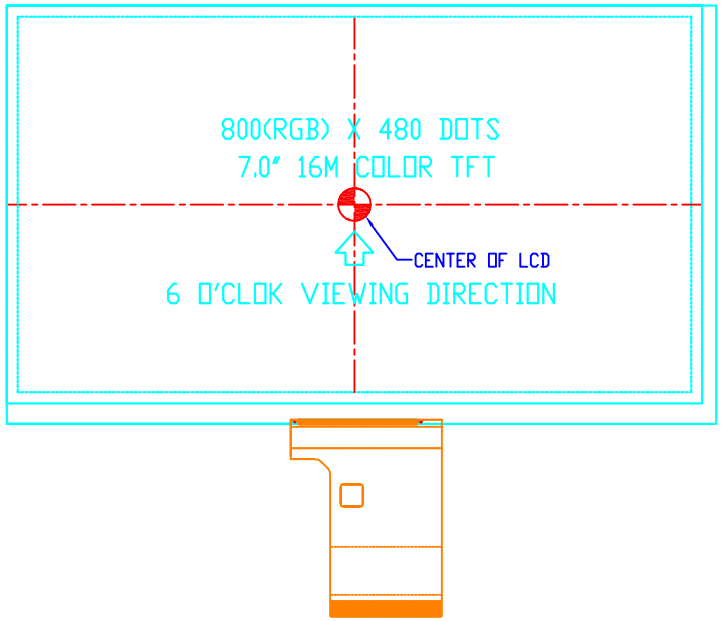

反面

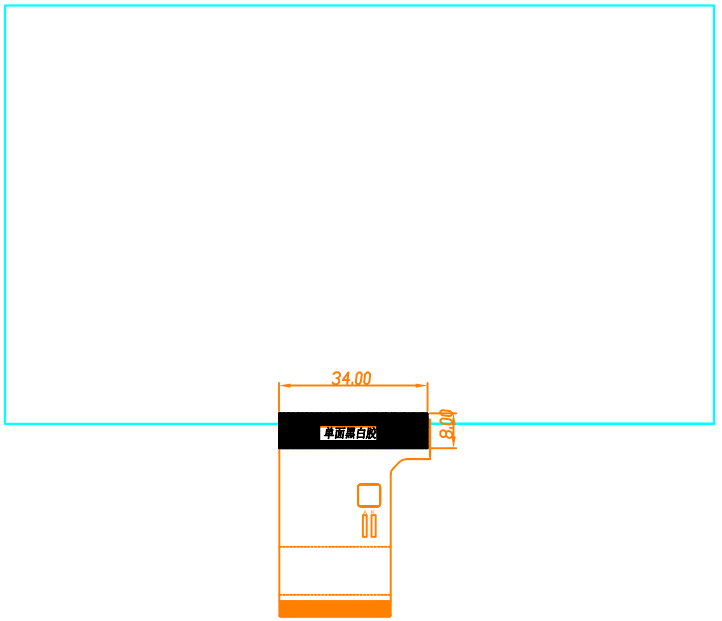

A0	新规则图纸	LONG	2014-12-12
ISSUE	AMENDMENT	NAME	DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED: LINER: X.x ±0.3, X.xx ±0.2
DIMENSIONS IN: MM | SIZE: A4 | ANGLE: 0.1°
MATERIAL: PART_MATERIAL | THICKNESS:1.6±0.2MM
SCALE: DRAWING_SCALE | FINISH:FINISHED | THIRD PROJECT ANGLE

	SIGN	DATE
DRAWN		
CHECKED		
APPROVED		

三圆科技有限公司
SANYUAN TECHNOLOGY CO., LTD

TITLE: MODULE_SPECIFICATION

ITEM NO.: FOG-Y70001A0 | REV.: C

DWG NO.: Y70001B00N. DWG | SHEET: 1/1