


Product Description:

- ★ Rated temperature: 105°C
Rated voltage: 600V
- ★ Reference Standard: UL Subject 758, UL1581 & CSA C22.2 NO.210.2
- ★ Tinned or bare, stranded, Top coated, Over coated copper wire or solid copper conductor
copper wire, 50 AWG minimum
- ★ Colour-coded lead free PVC or SR-PVC insulation
- ★ Uniform insulation thickness to ensure easy stripping and cutting
- ★ Passes UL VW-1 & CSA FT1 vertical flame test
- ★ Ultra fine version are available
- ★ Application: For internal wiring of electronic and electrical equipment, and power adaptor for portable PC

Conductor			Insulation		Spiral Shield		Jacket		Maximum Resistance at 20 °C Ω/km
AWG	No./mm	Dia. mm	Nom. Thick. mm	Nom.Dia. mm	No./mm	Nom.Dia	Nom. Thick. mm	Nom.Dia. mm	
36	7/0.050	0.15	0.15	0.45	-	-	-	-	1490
34	7/0.065	0.195	0.15	0.5	-	-	-	-	908
32	7/0.08	0.24	0.23	0.70	-	-	-	-	597
30	7/0.1	0.30	0.30	0.90	28/0.1	1.10	0.35	1.80	354
30	7/0.1	0.30	0.20	0.70	-	-	-	-	354
28	7/0.127	0.38	0.26	0.90	28/0.1	1.10	0.35	1.80	223
28	7/0.127	0.38	0.26	0.90	-	-	-	-	223
26	7/0.16	0.48	0.26	1.00	-	-	-	-	139
24	7/0.2	0.6	0.25	1.10	-	-	-	-	88.9
22	7/0.16	0.76	0.32	1.40	37/0.12	1.64	0.58	2.80	57.5
22	17/0.16	0.76	0.25	1.25	-	-	-	-	57.5
20	26/0.16	0.94	0.43	1080	57/0.1	2.00	0.56	3.10	34.6
18	65/0.127	1.18	0.30	1.78	47/0.12	2.02	0.59	3.20	23.3
16	51/0.18	1.52	0.32	2.15	54/0.12	2.39	0.61	3.60	15.1

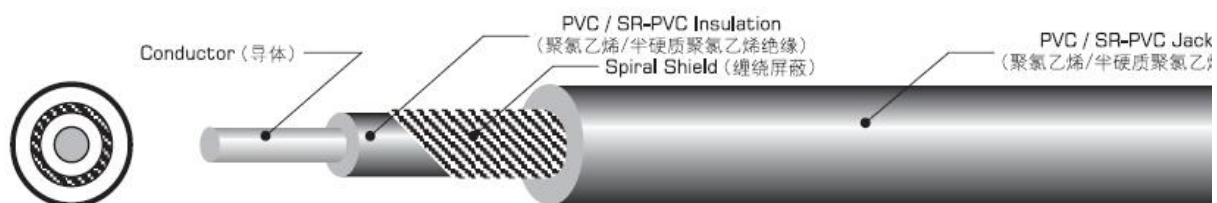

UL 1571 Hook-up Wire 连接线

cket
(烯护套)

