


十五、中间电源供电安装图 Middle power Feeding Installation Diagram

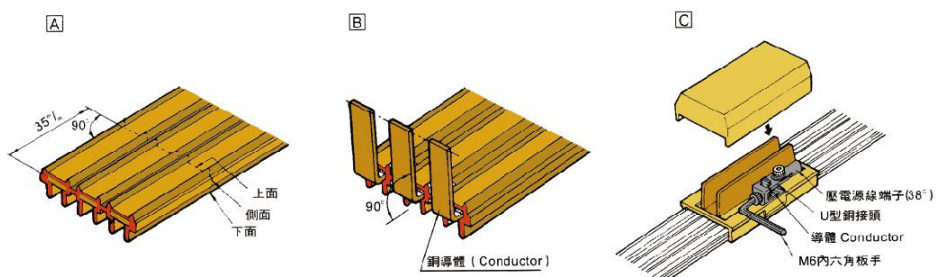

自电轨末端起35mm处将塑料去除。
Remove the PVC housing from 35mm conductor rail at the end.

再将铜导体往上折90°
Fold the copper bar into 90°

将两端弯好之滑线套入接头内
用U型铜接头夹住锁紧即可。
Put the folded conductor rails into the U copper connector and clamp.

Put the folded conductor rails into the U copper connector and clamp.

十六、滑触线及配件清单

序号No	名称 name	单位unit	配置Parameter
1	无缝滑触线 Flexible conductor rail	米 M	任意长度，根据客户要求而定 No joint, according to customer's requirements
2	支架 Bracket	只 Piece	0.5~1.0米（视工况条件而定） One piece each 0.5-1 m
3	滑线夹 Hanger clamp	只 Piece	支架数×1 The same to the bracket
4	中间供电 Line feed	付 set	实际需要而定 According to customer's requirements
5	拉紧器 End feed	付 set	每条线工作数量×2 Two set for one power line
6	集电器 Current collector	付 set	视行车台数、线数而定 According the number of mobile devices
7	拨叉 Fix square bar (tow arm)	只 Piece	集电器×1 The same to the current collector

具体所配数量可根据实际需要参见导轨技术参数表，或联系本公司列出详细设计方案及配件清单
The quantity of the accessories is according to the standard configuration or customer's requirements.

TBW安全滑触线系列

TBWL、TBWT Single-pole combination-type slide wire

一、产品概述 Product overview

工矿企业的各类起重机、电动葫芦的移动供电，如：各种发电厂、钢铁厂、石油化工厂、汽车厂、港口码头、机械制造厂、造船厂、造纸厂、纺织厂、车辆厂、铁路、糖厂、酒厂、化工厂、家电制造厂、仓库及货场等。



Supplying power to all kinds of cranes and electrical gourd used in many industries: Power Plants, Steel Industry, Oil & Chemical Industry, Auto Industry, Port, Plating Works, Shipbuilding Industry, Paper Mills, Textile Mills, Transportation System, Sugar & Wine Plants, Cement Plants, Warehouse and Material handling system

一些专用设备的移动供电，如：自动化生产线、游乐场的旋转或移动游乐车、飞机维修机库大门、厂房自动门、钢结构桥梁的维护小车、摄影厂、自来水厂设备的移动供电等。



Providing power to some special equipments in such places as Robotics, Amusement Parks, Airport, Bridges, Studio, Sewage & Water Treatment Plants.

二、产品型号 Model of product



规格型号 Model and specification	TBWG 60A	TBWG 100A	TBWG 125A
重量 (kg) L=4.5m	2.34	3.76	4.76





规格型号 Model and specification	TBWT 160A	TBWT 250A	TBWT 400A
重量 (kg) L=4.5m	2.76	3.04	4.40



规格型号 Model and specification	TBWL 160A	TBWL 200A	TBWL 250A	TBWL 315A	TBWL 400A	TBWL 500A
重量 (kg) L=4.5m	2.15	2.17	2.24	2.39	2.61	3.02




规格型号 Model and specification	TBWG 630A	TBWG 800A	TBWG 1000A	TBWG 1250A
重量 (kg) L=6m	10.38	12.66	17.28	20.58





三、产品配件Accessories

1、膨胀段系列 Expansion section

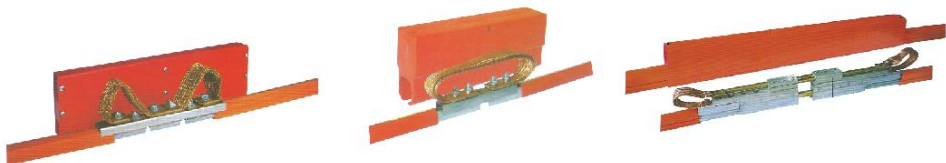


TBWG-4.5#
60A-400A

TBWL-4.5#
60A-500A

TBWL-6#
630A-1250A

2、接头装配件系列 Connector kit

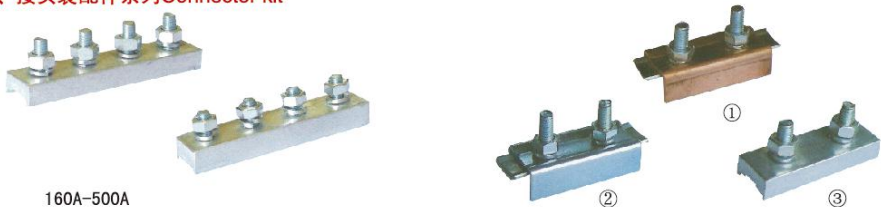

160A-500A

3、接头护套系列 Splice cover kit



60A-500A

2*120mm²

2*120mm²

4、集电器支架系列 Tow arm



0.75kg

1.50kg

5、动力输入系列 Power feeding kit



端部
End power feeding

端头
End cap

中间件
middle power feeding

6、提挂装配件系列 Hanger



0.06kg

0.03kg

0.04kg


0.05kg 0.06kg 0.08kg 0.09kg

7、通用集电器系列 Safe Slide-contact Wire




2*250A集电器
2*250A Current collector

100A双绝缘集电器
100A Double insulation current collector

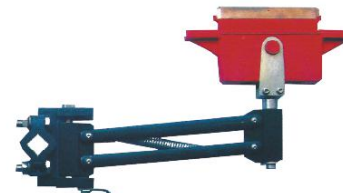

250A集电器
250A Current collector

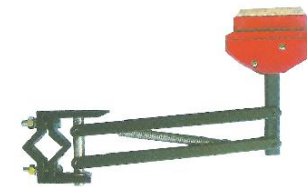

100A集电器
100A Current collector

