

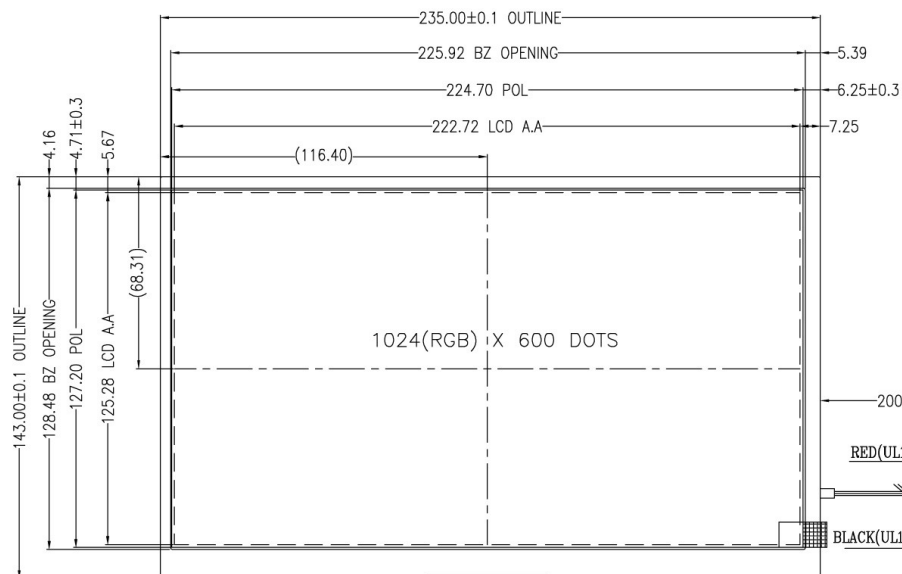


PIN	SYMBOL
1	AGND
2	AVDD
3	DVDD
4	GND
5	VCOM
6	DVDD
7	GND
8	V14
9	V13
10	V12
11	V11
12	V10
13	V9
14	V8
15	GND
16	DVDD_LVDS
17	GND
18	PIND3
19	NIND3
20	GND
21	PINC
22	NINC
23	GND
24	PIND2
25	NIND2
26	GND
27	PIND1
28	NIND1
29	GND
30	PIND0
31	NIND0
32	GND
33	DVDD_LVDS
34	GBR
35	STBYB
36	SHLR
37	DVDD
38	UPDN
39	AGND
40	AVDD
41	VCOM
42	DITH
43	GND
44	DVDD
45	GND
46	V7
47	V6
48	V5
49	V4
50	V3
51	V2
52	V1
53	GND
54	DVDD
55	SELB
56	VGH
57	DVDD
58	VGL
59	GND
60	NC

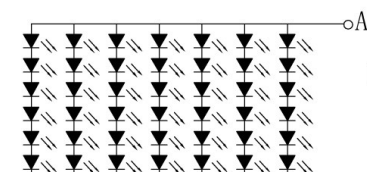

4.50±0.15

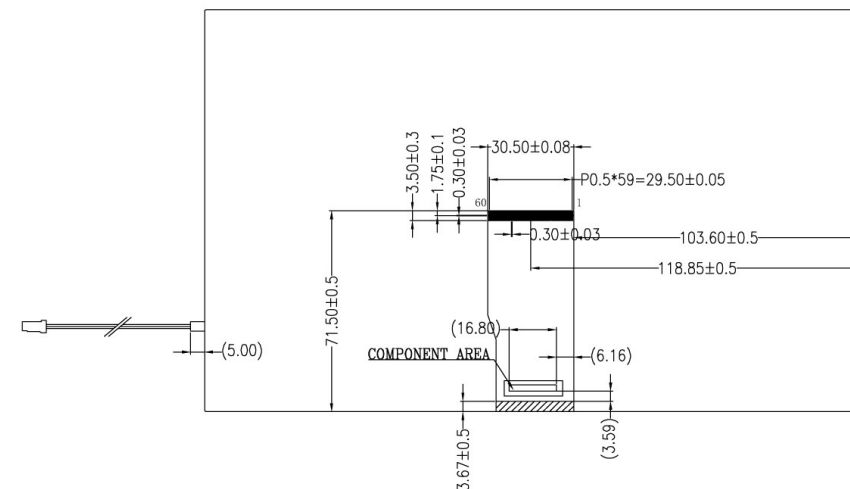

Backlight LED Circuit

6*7=42EA

If=25*7=175mA

NOTES:

- 1.DISPLAY TYPE: 10.1" TFT
- 2.DISPLAY MODULE: Transmissive, Normal
- 3.OPERATING TEMP.: -20° C--+70° C
- 4.STORAGE TEMP.: -30° C--+80° C
- 5.BACKLIGHT: LED
- 6.RoHS Complicant



东莞市精进光电有限公司

Jingjin Optoelectronics Co., Ltd.

DRAWN	UNIT	Customer NO.
	mm	
CHECKED	SCALE	Part NO.
	1:1	
APPROVED	DATE	TITLE
	VERSION	
	A	

JTA1010PZD1

OUTLINE