




EVER GRAND


DC BLOWER EB13540 SERIES



DIMENSIONS DRAWING

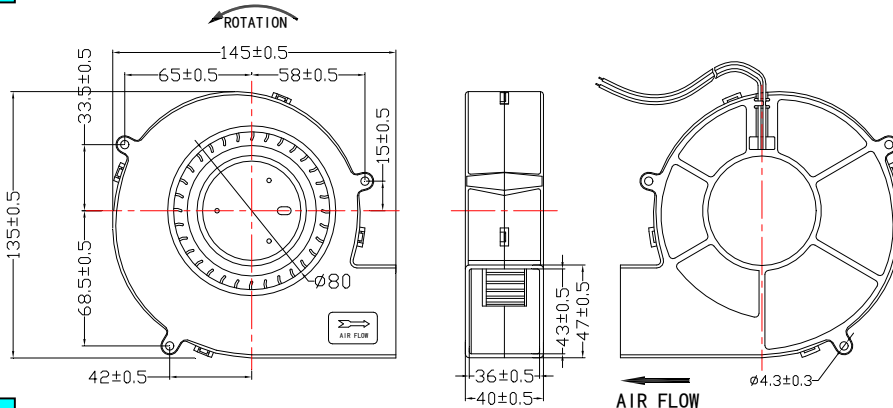

P&Q CURVE (AT RATED VOLTAGE)

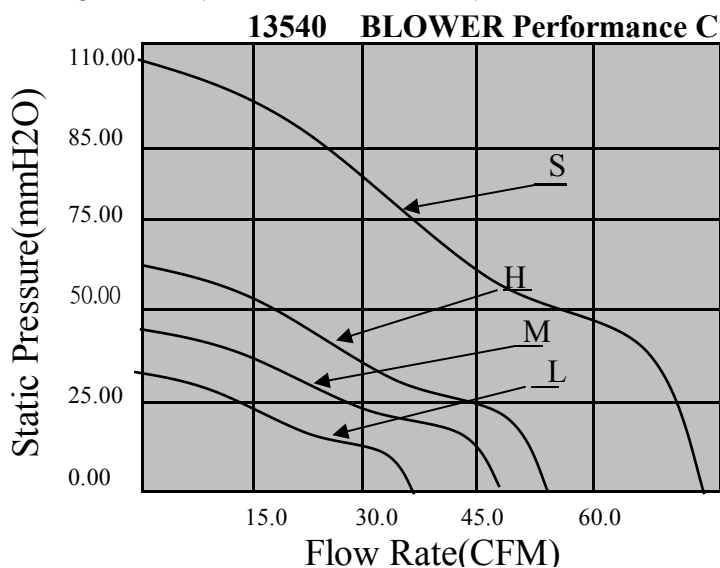

- *Material: housing/impeller: plastic UL94-V0
- *Operating Temperature: -10°C-70°C(35%-85%RH)
- *Storage Temperature: -40°C-70°C(35%-85%RH)
- * Lead wire type: #26AWG

Model	Bearing	Code	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
PART NO.			VDC	VDC	Amp	Watt	RPM	CFM	mmH2O	dBA	g
EB13540S(B)12S	S.B	S	12	9-13.5	4	48	3800	72.5	103.2	65.4	352
EB13540S(B)12H	S.B	H		9-13.5	2	24	2800	55.9	60.3	58.2	
EB13540S(B)12M	S.B	M		9-13.5	1.4	16.8	2500	46.4	41.4	55.7	
EB13540S(B)12L	S.B	L		9-13.5	1	12	2000	37.8	25.8	53.2	
EB13540S(B)24S	S.B	S	24	12-26.4	2	48	3800	72.5	103.2	65.4	
EB13540S(B)24H	S.B	H		12-26.4	1	24	2800	55.9	60.3	58.2	
EB13540S(B)24M	S.B	M		12-26.4	0.7	16.8	2500	46.4	41.4	55.7	
EB13540S(B)24L	S.B	L		12-26.4	0.5	12	2000	37.8	25.8	53.2	
EB13540S(B)48S	S.B	S	48	24-55.8	1	48	3800	72.5	103.2	65.4	
EB13540S(B)48H	S.B	H		24-55.8	0.5	24	2800	55.9	60.3	58.2	
EB13540S(B)48M	S.B	M		24-55.8	0.4	19.2	2500	46.4	41.4	55.7	
EB13540S(B)48L	S.B	L		24-55.8	0.3	14.4	2000	37.8	25.8	53.2	

*Function type is optional.

*The max air flow and the speed are measured in free air ;max .airpressure is measured at zero air flow.

*Noise is measured in anechoic chamber in free air ,one meter from intake side.

*All readings are typical values at rates voltage.

*Specifications are subject to change without notice.