



CAD FILE:




ELECTRICAL CHARACTERISTICS








1. RATING: DC 50V 0.5A
2. CONTACT RESISTANCE: $100\text{m}\Omega$ MAX
3. INSULATION RESISTANCE: $100\text{M}\Omega$ MIN
4. DIELECTRIC STRENGTH: AC 250V (50~60Hz) / 60S

MECHANICAL CHARACTERISTICS

1. PRACTICAL TEMPERATURE RANG: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
2. OPERATING FORCE: $180 \pm 50\text{gf}$
3. MECHANICAL LIFE: 30,000 cycles



SCHEMATIC

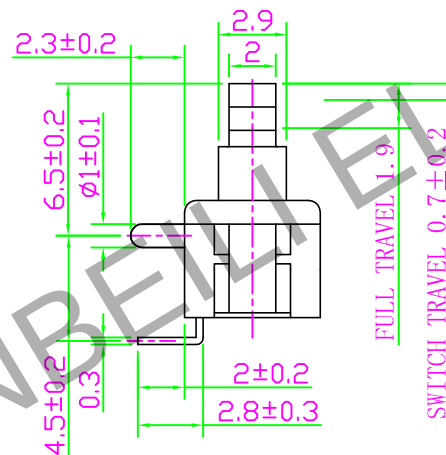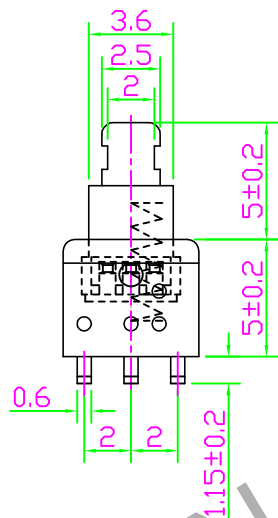

P. C. B LAYOUT

8	BASE	PA66	1	GREY	TOLERANCE UNLESS SPECIFIED				
7	LOCK PIN	STAINLESS STELL	1	NATURAL					
6	CONCACT	BRONZE	3	Ag PLATED	WITHIN 1.5: $\pm 0.1\text{mm}$ OVER 1.5: $\pm 0.2\text{mm}$ ANGLES: $\pm 2^{\circ}$				
5	SPRING	STAINLESS STELL	1	NATURAL	ISSUE	DATE	DESCRIPTIONS		APPD.
4	TERMINAL	BRASS	3	Ag PLATED	TITLE: VERTICAL PUSH SWITCH		UNIT:mm	DRWG. NO.:	
3	SPRING TERMINAL	STAINLESS STELL	1	Ni PLATED	MODEL NO: PB-22E60E		SCALE:4:1	DWN	
2	COVER	PBT	1	BLACK	DONGGUAN JINBAOLI ELECTRONICS CO.,LTD			CHK'D	
1	BUTTON	PA66	1	WHITE				APPD.	
NO.	DESCRIPTION	MATERIAL	QTY	PLATING					