


惠州宏利源电器有限公司

HONYONE ELECTRICAL APPLIANCE CO.,LTD

S-03DF

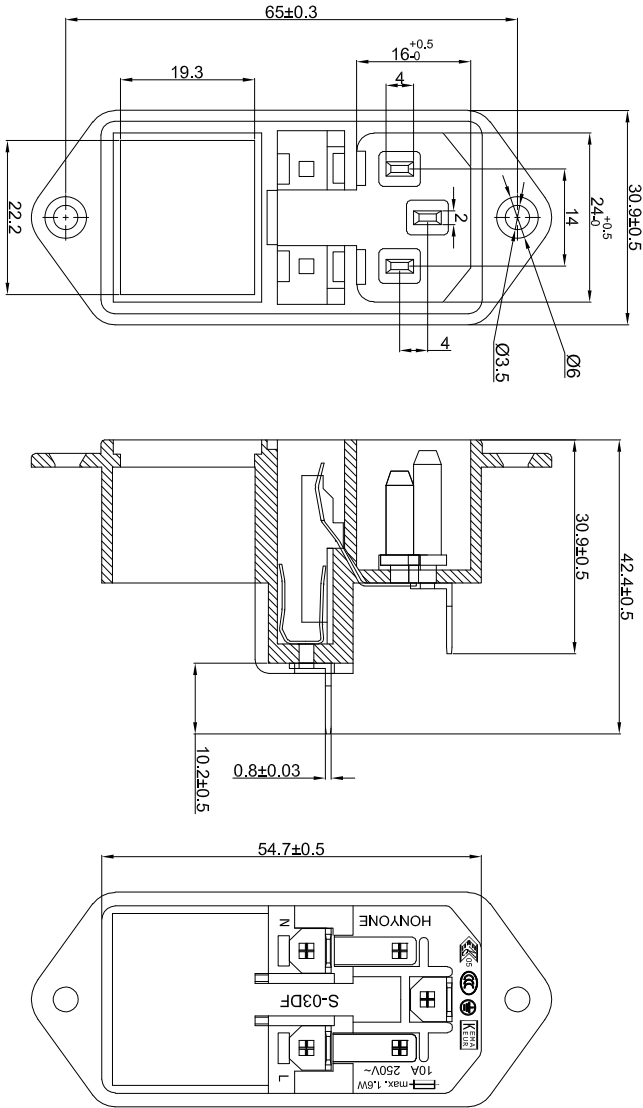

Rating:

10A 250VAC max. 1.6W (ENEC K-MARK)
10A 250VAC max. 1.6W (CCC)

Insulation Resistance:DC 500V 100MΩ Min

Dielectric Strength:AC 2000V1minute




Fuse:Ø5.0x20mm

MATERIAL:

Base: PBT, UL rated:94 V-0 Min;

Cap: PA66;

Terminal: Brass, Tin plated .

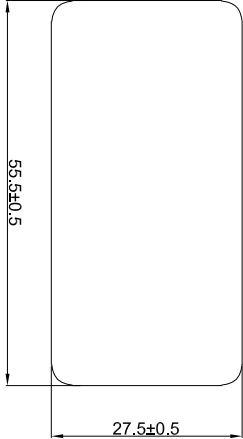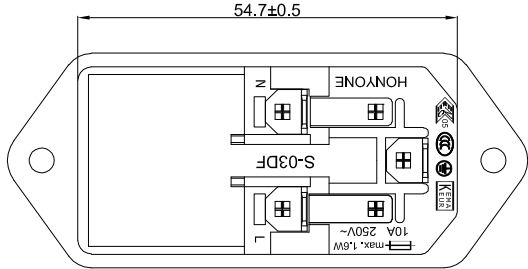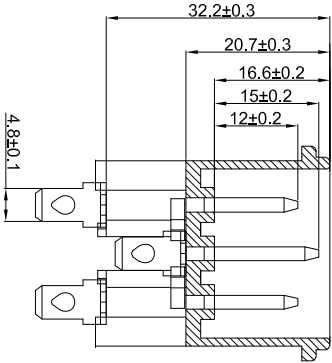

PANEL CUTOUT

			公差 TOLERANCES		.X± 0.3 .XX± 0.15		角度 ANGLE ± 1°		单位	DIMENSION UNIT		mm.
			视角		比例尺	NONE	日期		品 名		图 号	
A1	认证信息更新		VIEWING ANGLE		SCALE		DATE	2020.05.29	TITLE		DRAWING NO	
A0	New Issue								S-03DF-11S		S-03DF-11S_CP_A1	
版本 VER.	变更说明	CHANGE DESCRIPTION	日期 DATE	ECN NO.	核准	核 对	绘图		CHECKED BY	Sinc	DRAWN BY	姜庆勇