


APPROVED BY:


Ver	Date	Modify Contents

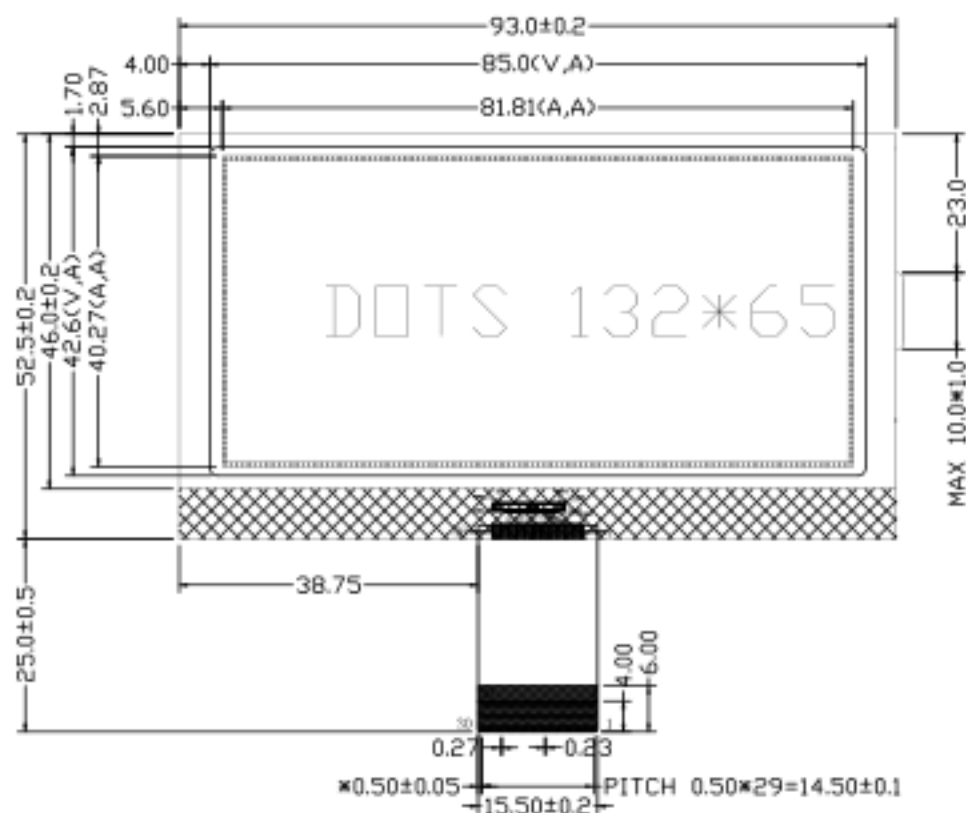


NOTE:

1. GENERAL TOLERANCE: $\pm 0.2\text{mm}$
2. THE PART OF *ARE THE KEY DIMENSION TO CONTROL

LCD TYPE	FSTN	BACKLIGHT COLOR	*****
POLARIZER TYPE	TRANSFLECTIVE	FRAME TYPE	*****
DISPLAY TYPE	POSITIVE	DATA TRANSFER	SPI/PARALLEL
LCD COLOR	*****	CONNECTOR TYPE	FPC
VIEWING ANGLE	12:00	TECHNOLOGY	COG
OPERATING TEMP	-20°C ~ +70°C	DC-DC IC	BUILT IN
STORAGE TEMP	-25°C ~ +75°C	LCD DUTY	1/85
BACKLIGHT TYPE	*****	LCD BIAS	1/9
CONTROLLER IC	ST7565P	ROHS	
REMARKS	VDD=3.3V, Vlcd=9.5V(typ)		



SCALE 10:1

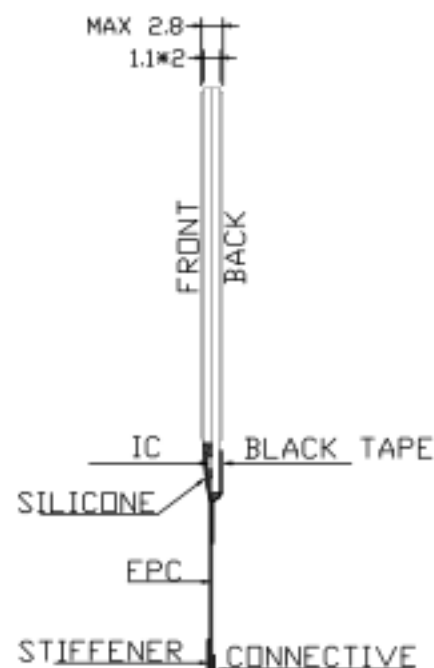

PIN CONNECTION

NO	SYMBOL
1	/CS1
2	/RES
3	A0
4	/R/W:/WR
5	EP:/RD
6	DB0
7	DB1
8	DB2
9	DB3
10	DB4
11	DB5
12	DB6:SCL
13	DB7:SI
14	VDD
15	VSS
16	VOUT
17	CAP3+
18	CAP1-
19	CAP1+
20	CAP2+
21	CAP2-
22	V4
23	V3
24	V2
25	V1
26	V0
27	VR
28	CB6
29	P/S
30	/IRS



安徽金视界光电科技有限公司

GOLDEN-VISION CORPORATION SPECIFICATION

TEL: (0559) 7528035

FAX: (0559) 7528266

PRODUCT NO.	GVH13265GFFN011-21855A(LCM)				
CUSTOMER NO.					
DRAWN BY	CQ 2015.11.26	SCALE	1:1	REV.	V01
CHECKED BY		PAGE	4th		
APPROVED BY	Frank 2015.11.26	UNIT	mm		

发至: ■开发 ■COG质量 ■COB质量 ■生管 ■销售 ■FAE ■LCD贴片 ■IQC