



Category

- SWITCH
- SOCKET
- INLET
- OUTLET
- IEC EMI FILTER
- RECEPTACLE
- PLUG
- INDICATOR
- SENSOR
- ELECTRO-MODULE
- BREAKER
- FUSE HOLDER
- FUSE
- ENCODER
- POTENTIOMETER
- CONNECTOR
- WIRE HARNESS
- BUZZER
- NEW PRODUCT



OUR PRODUCT

[Home](#) ▶ [Our Product](#) ▶ [JZ-DC](#) ▶ [JZ-DC](#)

SOCKET / INLET

JZ-DC
DC Power Socket with Fuse Holder, up to 20A, 12~48VDC

2-in-1 socket inlet with fuse holder
Inlet up to 20A 12~48VDC
Snap-in Mounting or panel built with holes for screws fastening
Quick-connect terminal with .250 or .187 type available

[PDF Download](#)

[Get Information](#)

[Print this page](#)



ZOOM IN

Feature

- Rating: 20A 12~48VDC
- Fuse holder spec.: Max. 15A
- Insulation resistance: 100M Ohms min, DC 500V

Products Search

Search








- Dielectric strength: 2,000VAC for 1 minute
- Fuse holder type: Standard medium size blade fuse
- Quick-connect terminal: .250 or .187 type
- Housing: PA66 (black), UL-94V-0
- Application: Car refrigerator, portable fridge units

Specification



JZ-DC-01

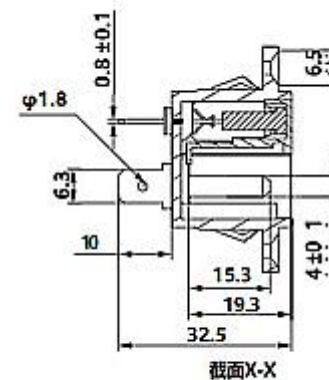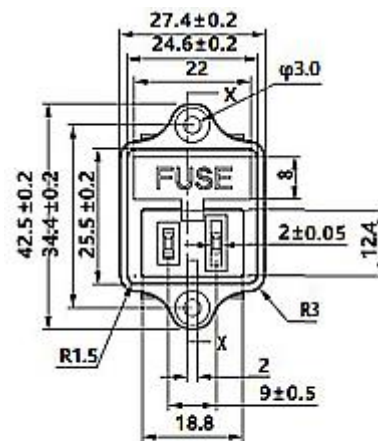

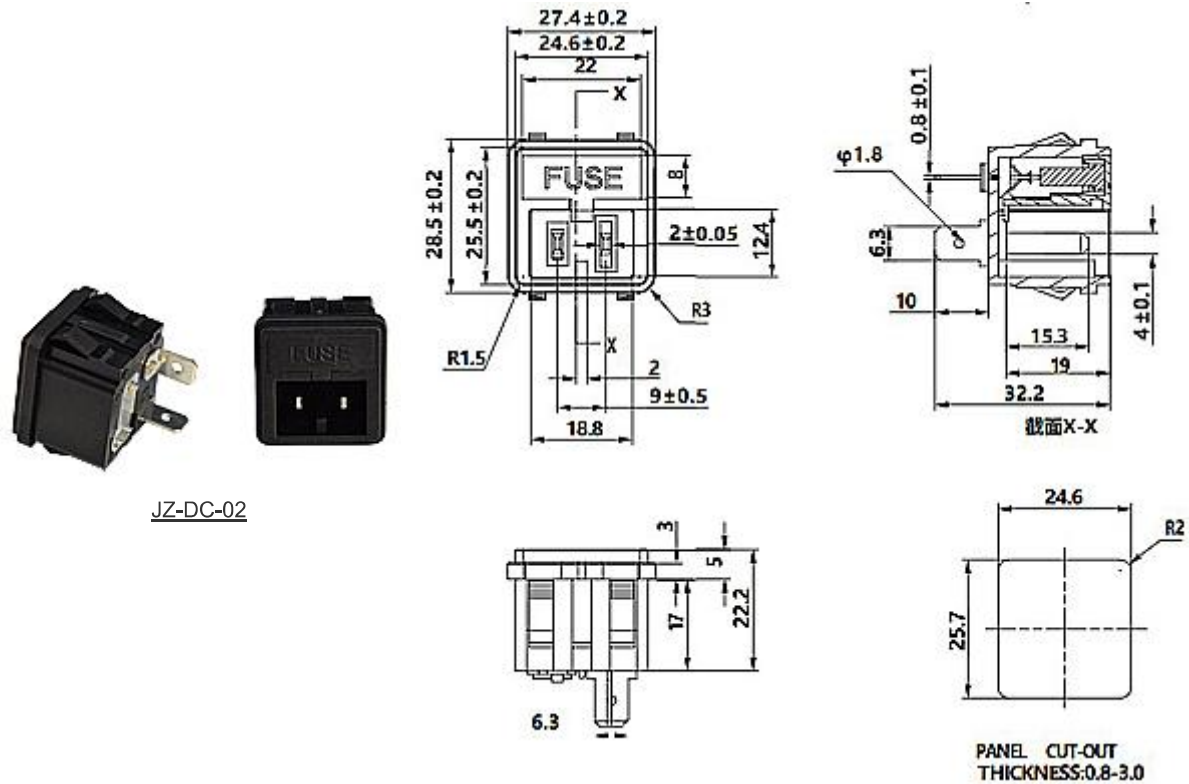

JZ-DC-02

◀ BACK



5F., No.10, Lane 218, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, R. O. C.

Tel: +886-2-29161263 Fax: +886-2-29117574 canal@c-components.com.tw

©2009 Canal Components Inc. All Rights Reserved