

1

2

3

4

5

6

7

8

9

SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c


Contact Material:Brass

Contact Plating:Au or Sn Over Ni


Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

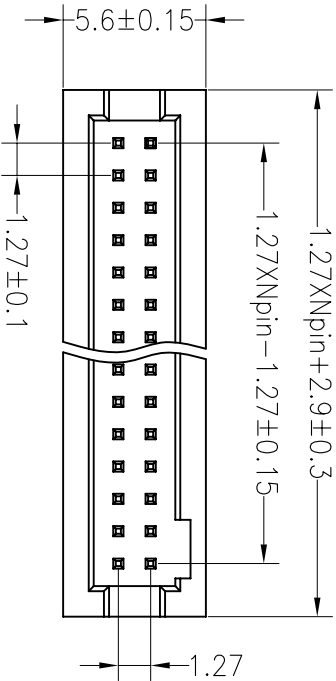

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

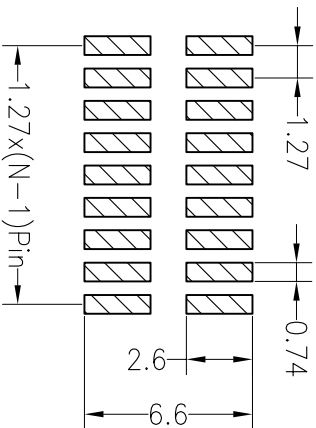

G

F

E

D

C

B

A

Ordering Information

3257 2 XX G0 X M X1

No.of Pins Per Row 6--64
Contact Plating G0:Gold Flash
Insulator Material Option
Packing A=Troy
T=Tube
R=Tape&Reel
A=BK-PBT
B=BK-PA66
C=BK-PA6T
D=BK-PA46
F=BK-LCP
S0:Gold Flash/Tin
SN:Tin

