



吸盘位置

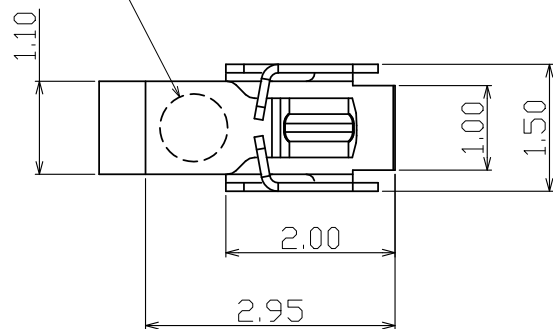





NOTES:

- 1.Mechanical Characteristics :
Material: Stainless T=0.10mm
Durability: 1500 cycles min.
Contact force : 30gf Min of press 0.60mm .
- 2.Plating
Contact Area : Au 3 μ Over Ni 50~120 μ
SMT Area : Gold Flask Over Ni 50~120 μ
- 3.Environmental Characteristics
Salt-Mist: 35℃, 5%NaCl,24hour min
Solderability: 245℃, 5sec. (Solder tail shall be covered more than 95% of immersed area with flash solder)
- 4.Flatness inside 0.05mm (Max)

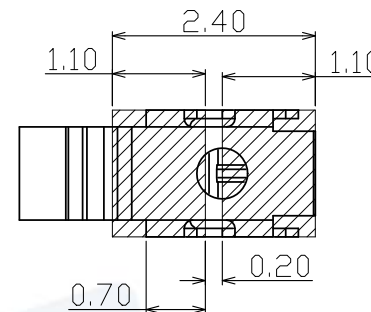


RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE(TOLERANCE ± 0.05)

PAD AREA

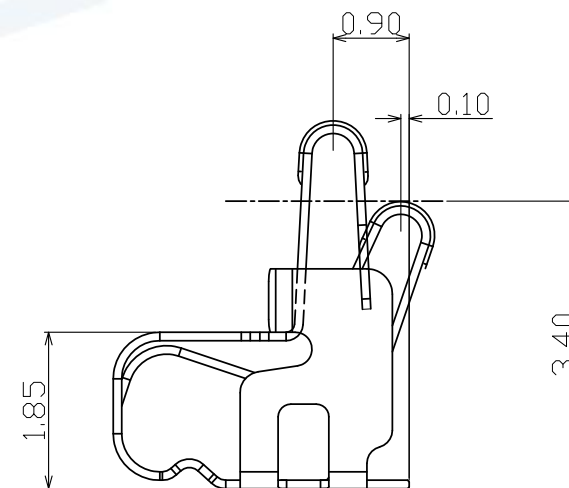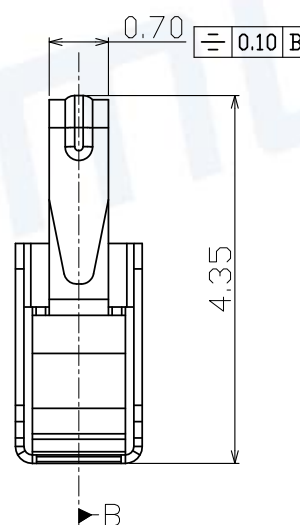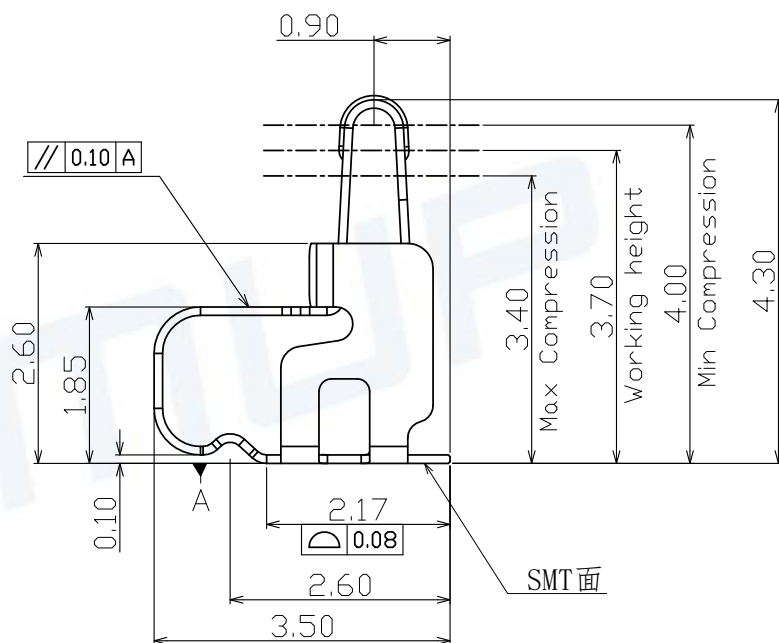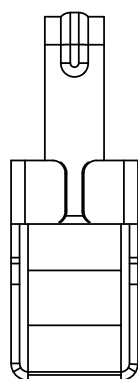

Working height 3.4mm



Unless otherwise specified, other tolerance are:				MUP ® MUP INDUSTRIAL CO.,LTD.			
X	±0.35	X°	±5°	NAME: RF Antenna Spring SMT			
X.X	±0.25	X.X°	±4°	MODEL NO: MUP-S1102-1			
X.XX	±0.15	X.XX°	±3°	TYPE : L3.5*W1.5*H4.3			
X.XXX	±0.10	X.XXX°	±2°	PROJ.	UNIT	SCALE	DRAWN
					mm	1:1	C.J.Deng 2019/2/28
				CUSTOMER DRAWING		CHECKED	C.J.Deng 2019/2/28
						APPROVAL	WANG 2019/2/28
						DWG NO.:	DWG-MUP-S1102-001
						SHEET	1/1
						REVISION	1

