


VC-PL7008R Monitor Parameter



bracket



U-shape bracket

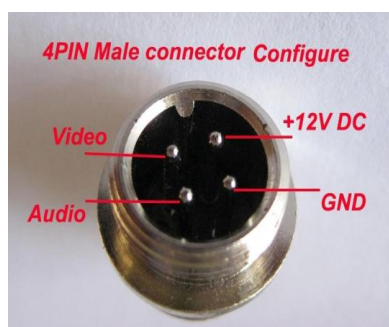

4PIN Male connector Configure

Video
Audio

+12V DC

GND



1. 7.0 inches **digital** LCD monitor
2. **Pixel: 800×3(RGB)×480**
3. Brightness: 350 cd/m²
4. Contrast: 300:1
5. Operation temperature: **-30℃~80℃**
6. Picture display format: 16:9/ 4:3
7. Key color: Electroplating silver with 6pcs
8. System: Automatic PAL / NTSC
9. Size:175 W×128 H×22mm T
10. **With Tech well USA import IC**
11. Power Consumption: < 500mA, **built-in 24V (8-32V DC Wide voltage, advise 24V DC)**
12. The display with 3 video frequency input (AV1, AV2,AV3)
Automatic/manual switcher
13. **Software with trigger delay for left and right side**
14. 9 languages OSD menu: Chinese, English, Russian, German, Portuguese, Spanish, French, Italian, **Traditional Chinese**
15. Waterproof:**IP55** (for optional)