



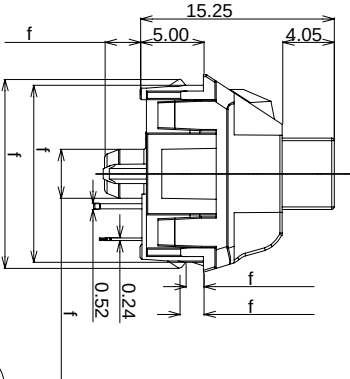


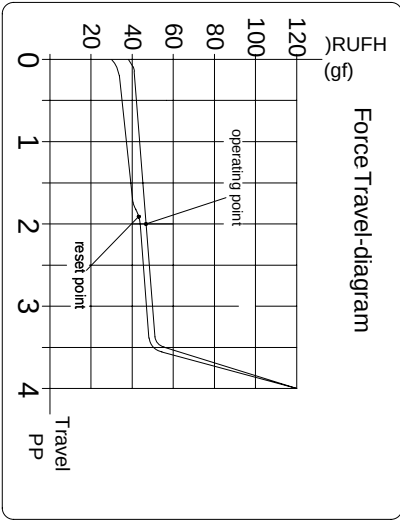



ABIDE BY ROHS

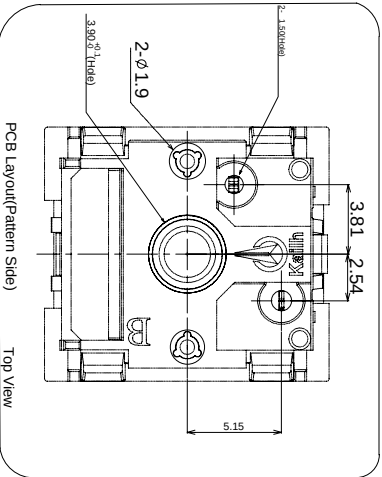

- Specification :
- 1. Rating : 12V AC/DC max. 2V DC min. 10mA AC/DC max. 10 μ A DC min.
 - 2. Contact Resistance : 200m Ω Max
 - 3. Insulation Resistance : 100M Ω Min (DC500V)
 - 4. Withstand Voltage : AC100V(50-60Hz) for 1 minute
 - 5. Bounce Time : $\leq$ 5msec (at 16 in/sec. actuation speed)
 - 6. Operation Force : 45 ± 5 gf
 - 7. Pre travel : 2.0 ± 0.5 mm
 - 8. Total travel : 3.4 ± 0.4 mm
 - 9. Operating Life : 70,000,000 Cycles(temporary).
- <Feel is allowed to have difference before and after life test>



⑧	Light guide	1	PC		
⑦	Base	1	POM		
⑥	Spring	1	Stainless Steel		
⑤	contact	2	Composite gold		
④	Cover	1	POM		
③	Keystroke	1	POK		
②	static plate	1	Brass		
①	movable plate	1	Copper Alloy		
ITEM	PART NAME	TERNO QTY	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	DRAWN		2023.07.17	CHECKED		APPROVALS	
			Duxiaosheng						
			Kaifu						
			TITLE:		PG1511 Keystroke Switch				
			PART NO.		CP0151101S285				
			SCALE: 1:1		PROJ				
			DRAFTING NO.		KEM-PO1511-495EN				
			SHEET 1 OF 1						

ECN-2310-027	B	2023.10.18							
ECN NO.	REV.	DATE.							

Cover added customer LOGO		NEW		CHANGE.		CHECK.		APPRO.	

TOLERANCES ARE		ANGLE		UNIT: mm		SCALE: 1:1		PROJ	