
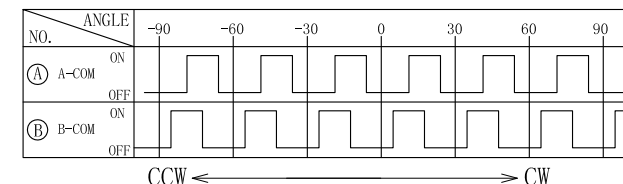
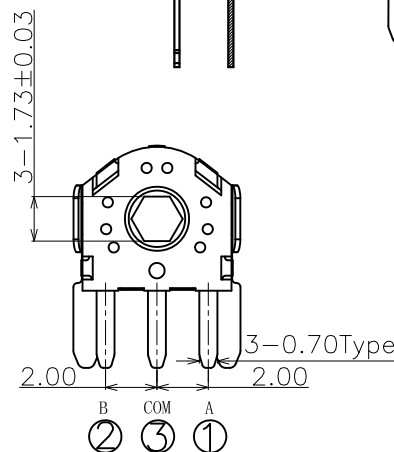

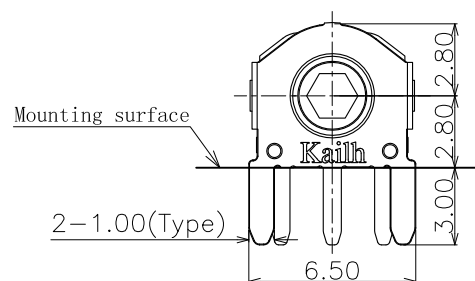
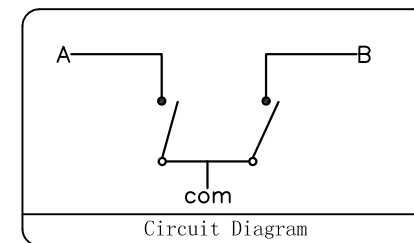




ABIDE BY ROHS




Numbers of detent: 12
Pulse/Rotation: 12 Pulse/360° (reverse)

Specification :


- 1. Rated voltage: D.C. 5V
- 2. Maximum operating current(resistive load)
Each load :1mA
- 3. Resolution: 12 pulses/360° for each phase
- 4. Contact Resistance: 5Ω (Max)
- 5. Insulation resistance: 50MΩ (Min) DC50V
- 6. Dielectric strength: AC50V (50-60Hz) for 1 minute
- 7. Detent torque: 10-25gf.cm
- 8. Life Test :100,000 Cycles(min)

Shaft hole shape and dimension

Shaft hole position
will be at random



(Tolerance: ±0.1)

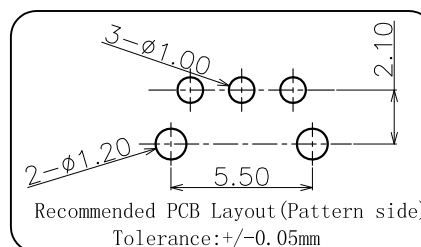

备注：底座背面的压针孔★是根据产品模具成型要求而定的，其规格的大小与数量的多少对产品结构、功能及使用无任何影响。

⑧	Fixed Plate	—	1	Stainless Steel	—	—
⑦	Revolving Wheel	—	1	PA66	Gray	—
⑥	Contact	—	1	Phosphor bronze	—	—
⑤	Base	—	1	PA66	Gray	—
④	Shell	—	1	Stainless Steel	Plating Tin	—
③	Terminal COM	3	1	Brass	Plating Silver	—
②	Terminal B	2	1	Brass	Plating Silver	—
①	Terminal A	1	1	Brass	Plating Silver	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE		 Kailh	东莞市凯华电子有限公司 DONGGUAN CITY KAIHUA ELECTRONICS CO.,LTD		
DRAWN	WUYU	2018.08.28					
CHECKED				TITLE:	Encoder(H=2.80mm/DIP)		
APPROVALS				PART NO.	CEN652812R01		
TOLERANCES ARE		30<L	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10<L≤30	±0.20				
		5<L≤10	±0.15				
		L≤5	±0.10				
		±2°		DRAWING NO.			SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			