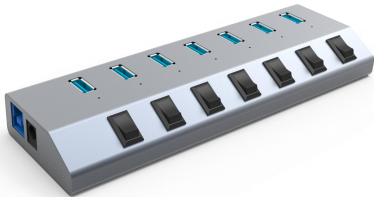


		Winstars Product Specifications		Version	V2.1						
				Page	1/1						
		Model	WS-UH3076			Date	2020-09-10				
		Name	7 Ports USB-3.0 Hub with Fast Charging		Writer		彭祥云				
Picture tupia 图片				Features: 特点							
				1. Seven USB3.0 ports Super-Speed USB3.0 interface support transfer rates up to 5Gbps 2. Each port support fast charging USB BC1.2 (max. 1.5A) at PC Off-Line or Sleep Mode 3. Each port have Power On/Off switch 4. Each port have Led indicators, display when through PC connection and USB device plug in. 5. Each port support (OCP) Over current protection at current 2.4A have been cut off 6. Backward compatible with USB 2.0/1.1 7. Support hot swapping, Plug and Play 8. Supports Microsoft Windows 7/8/10 & MAC OSX							
Title 标题											
Vertical 7 Ports USB-3.0 Hub with Fast Charging											
Description 介绍				Package content 标配		SYSTEM REQUIEMENT: 系统配置					
Attractive brushed aluminum and compact design with 7 independent port with blue LEDS to Simple and convenient to complement high end Tablet PC/ Laptop or Apple PC products. Individual power switch for convenient shut-off of lights and devices. The hub supports USB 3.0 transfer rates up to 5Gbps to allow data to move quickly between devices, ideal for high-throughput devices such as USB external hard drives, flash drives, and USB graphics adapters. Fully plug and play, devices can be hot-swapped, supports USB over-current protection.				1 x 7 Ports USB-3.0 Hub 1 x USB3.0 extension cable 1 x DC20V/3.25A Power Adapter		Supports Microsoft Windows 7/8/10 and MAC OSX					
Specification 规格											
Hardware 硬件				Functions 功能		Exterior 外观					
Ports	DC Jack, USB3.0 Type-B, USB3.0 Type-A x 7			Working Standards	Data: USB3.0 at 5Gbps Fast Charging: USB BC1.2 at 1.5A	Color	Charcoal gray				
Button	On/ Off Switch x 7					Cable	Black				
LED	Blue x 7										
Chipset	GL3520										
Flash	512k Byte			Operating System Support	Microsoft Windows 7/8/10 & MAC OSX						
SDRAM	NIL										
Power Supply	Self Power										
Power Plug	DC Jack			Max. Pixels	NIL						
Power Consumption	55W full Loading			Max. Charing Current(A	1.5A per port						
Rated Voltage/ frequency /current		100-240 Va.c. 50/60Hz, 1.5A Max									
Dimensions 尺寸				Certification 证书							
Unit Dimensions	188.1*59.1*20.65mm (L x W x H)			CE-EMC	by Request						
Weight	160G			CE-RTTE	by Request						
Housing Material	Aluminum alloy			CE-LVD	by Request						
Shell color	Aluminum alloy Gray			FCC DOC	by Request						
Package Dimensid	By Request			FCC ID	by Request						
Environmental 环境				ROHS	by Request						
Operating Temperature		0℃~40℃		Reach	by Request						
Storage Temperature		-10~70℃		3C	by Request						
Relative Humidity(Operational)		10%~90%,noncondensing		Others 其他							
Relative Humidity(Storage)		10%~90%,noncondensing		Method	See Manual						
Drop test (1 Meters)		5 st		Performance	See Test Report						
Cycle work (hours)		24H		Reliability	See Test Report						