

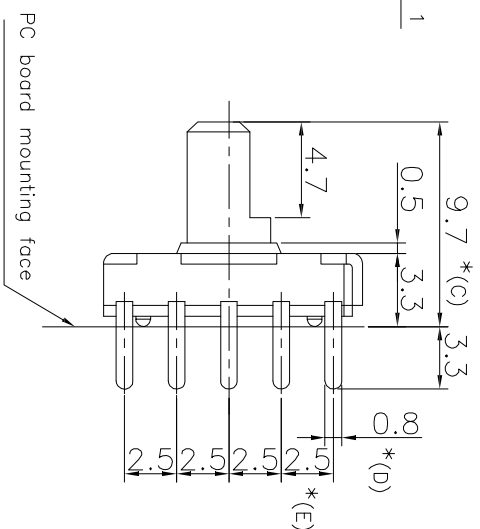




1. RATING:DC 16V 0.1A.
2. Contact resistance:<100m $\Omega$
3. INSULATION RESISTANCE:100 M $\Omega$  MIN(DC 100V).
4. WITHSTAND VOLTAGE:AC 100V/1 MINUTE.
5. OPERATING TEMPERATURE:-25 $^{\circ}$  C~+85 $^{\circ}$  C.
6. ROTATIONAL TORQUE:13 $\pm$ 5mN $\cdot$  m
7. LIFE CYCLE:10000 CYCLES.

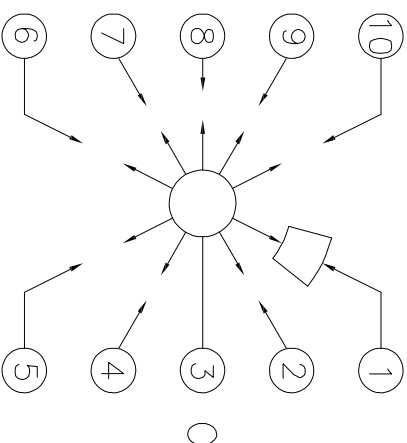

CIRCUIT

|                                                         |       |           |              |              |  |  |
|---------------------------------------------------------|-------|-----------|--------------|--------------|--|--|
| TOLERANCE<br>UNLESS SPECIFIED                           |       |           |              |              |  |  |
| less than 10±0.3<br>above 10-30±0.5<br>above 30-100±1.0 |       |           |              |              |  |  |
|                                                         | ISSUE | DATE      |              |              |  |  |
| TITLE:旋转开关                                              |       | UNIT:mm   |              | DESCRIPTIONS |  |  |
| MODEL NO:BM-1009-R                                      |       | SCALE:4:1 |              | DRWG. NO.:   |  |  |
|                                                         |       | DWN       | YINCONG      |              |  |  |
|                                                         |       | CHK'D     | ZHENGZHILIU1 |              |  |  |
| DONGGUAN CITY JINBEILI ELECTRICAL TECHNOLOGY CO.,LTD    |       | APPD.     | LILISANJUN   |              |  |  |