


CRXCONEC

CRXCONEC COMPANY LTD.

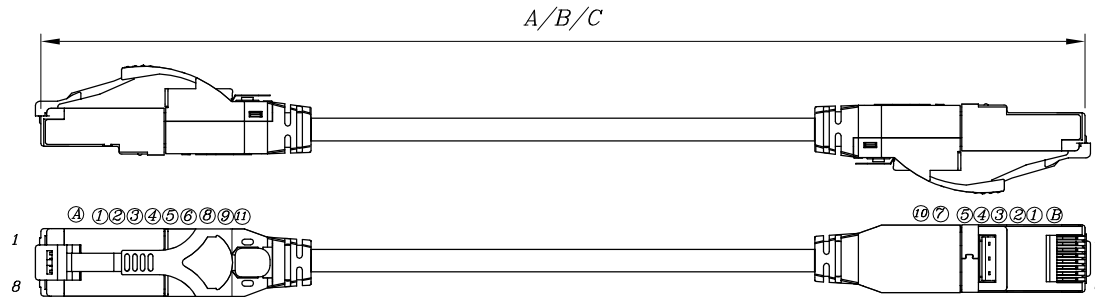


PLUG:

Drawing						
Mark					✓	✓
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"
Mark						✓
TYPE	Shielded	Unshielded				
Mark	✓					
PC	UL 94-V0	UL 94-V2				
Mark		✓				





ARRANGE METHOD:





Remarks:


- I. "A" indicate Length 1~10M(10M not included), tolerance $\begin{smallmatrix} +80 \\ -0 \end{smallmatrix}$
- II. "B" indicate Length 10~20M(20M included), tolerance $\begin{smallmatrix} +150 \\ -0 \end{smallmatrix}$
- III. "C" indicate Length above 20M(20M not included), tolerance $+(C*1\%)/-0$

ITEM	DESCRIPTION		MATERIAL			COLOR		Q'TY	ITEM	DESCRIPTION		MATERIAL			COLOR		Q'TY	DWG NO. P60UTB152-001						
①	PLUG HOUSING		C6RH5Z50V2IL-3R			transparent		2	⑧	BATTERY		CR927			/		1							
②	Insert		3R I1.1 V2			transparent		2	⑨	BATTERY COVER		PC UL 94-V2 01-150			transparent		1							
③	Cross Insert		3R V2			transparent		2	⑩	FULL COVER		PC UL 94-V2 01-150			transparent		1							
④	Boot		Top cover V2 01-151			transparent		2	⑪	BATTERY BLOCKER		PET			red		1	TITLE 60-UT-08-XX-YYYY-ZZ CAT.6 UTP TRACEABLE PATCH CORD						
⑤	Boot		Buttom cover Ø6.5 V2 01-152			transparent		2	⑫	Cable Tie		"C"MM			white		2							
⑥	PCB		EV06FT-REVL Red button			red light		1	⑬															
⑦	PCB		EV06FT-REVL Black button			red light		1	⑭															
MATERIAL				WIRE CONNECTION TABLE									LENGTH		TOTAL		MOLD NO.		UNIT		SCALE		SHEET	
				white / orange		orange	white / green	blue	white / blue	green	white / brown	brown							red	green	mm		1/1	
CAT.6 UTP (4P*24AWG+ 2C*30AWG)		PVC											(A/B/C+80)*[25(0)]*[25(0)]		02-151		DRAWN DATE		PROJ.		REV			
		LSOH													02-152		2019/05/09				1			
																			APPROVAL		CHECKED		DRAWN	
CABLE COLOR			red	orange	yellow	green	blue	purple	gray	white	black							Carine		Wuming		CathyLi		



CRXCONEC
CRXCONEC COMPANY LTD.

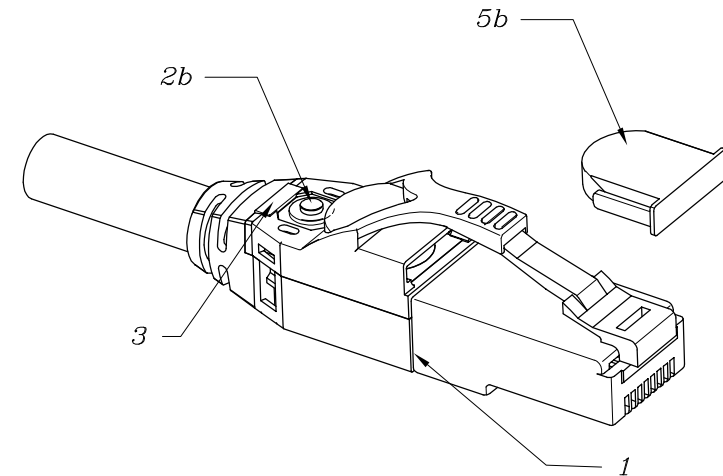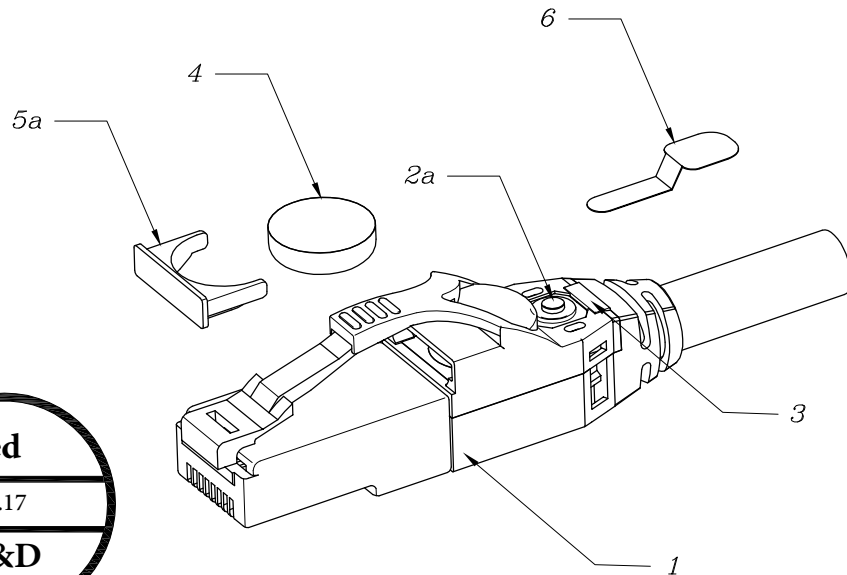

NO.	Part Name	Material		DWG NO. ASSEMBLY.SR-482-1		
1	PLUG HOUSING	PC UL 94-V2/50" gold plating		TITLE CAT.6 UTP TRACEABLE PATCH CORD		
2a	BUTTON	Red button	>1000 button press			
2b	BUTTON	Black button	>1000 button press			
3	LED	Red light				
4	BATTERY	CR927 Lithium battery cell	>500 hours LED lighting	UNIT mm	SCALE 3/2	SHEET 1/1
5a	BATTERY COVER	PC UL 94-V2		DRAWN DATE 2019/05/09	PROJ. 	REV 1
5b	FULL COVER	PC UL 94-V2		APPROVAL	CHECKED	DRAWN
6	BATTERY BLOCKER	PET	Pull out when first time using	Carine	Zach	Ma