


SPECIFICATIONS:

- 1、Rated Voltage: 0.66KV
- 2、Insulation Voltage: 3KV
- 3、Rated Frequency: 50HZ or 60HZ
- 4、Operating Temperature: -15℃ to 60℃
- 5、Flame resistance: UL94-V0
- 6、Certificates: CE、UL2808
- 7、Class: 0.5

FEATURES:

- 1、Small cost
- 2、Split core design ,Easier installation
- 3、Build diode ,no high voltage danger
- 4、Good linearity at very low current
- 5、High accuracy

DIMENSIONS(mm):

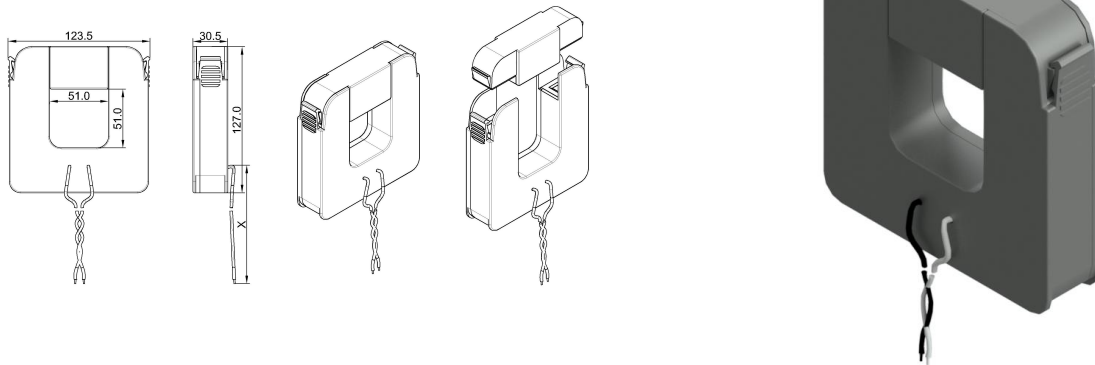

PARAMETERS:

Model	Input(A)	Max current (A)	Output
XH-SCT-2000S	0-1600	1600	mA/0.333VAC/0-5VAC

