

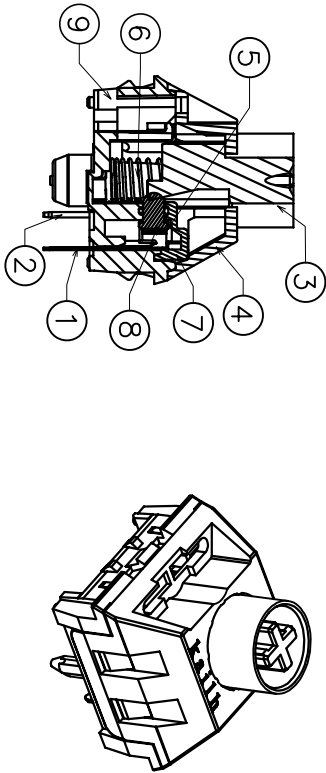
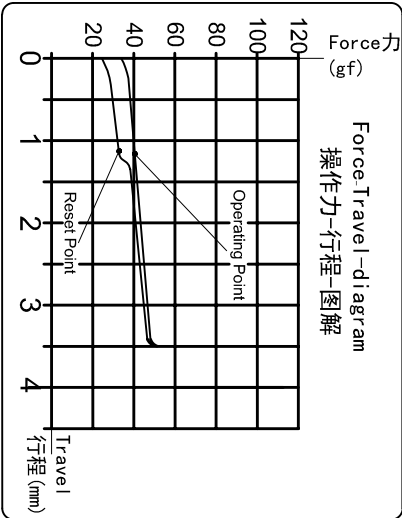






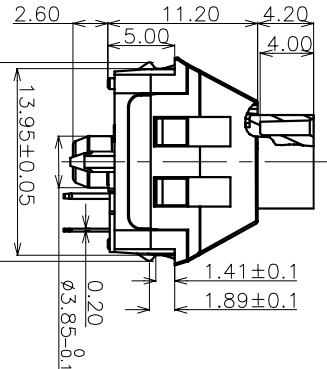


■ 电路图



- Specification :
- 1. Rating: 12V AC/DC max. 2V DC min. 10mA AC/DC max. 10 μ A DC min.
 - 2. Contact Resistance: 200m Ω Max
 - 3. Insulation Resistance: 100M Ω Min. (DC100V)
 - 4. Withstand Voltage: AC100V(50-60Hz) for 1 minute
 - 5. Operation Force: 40 $\pm$ 10gf
 - 6. Conduction travel: 1.0 $\pm$ 0.1mm
 - 7. Total travel: 3.5 $\pm$ 0.3mm
 - 8. Electrical Life: 50,000,000 Cycles(min).
 - 9. Degree of protection: IP54(Only for the electrical functional Box sealed part)
- <Feel is allowed to have difference before and after life test>

■ 轴倾斜角度

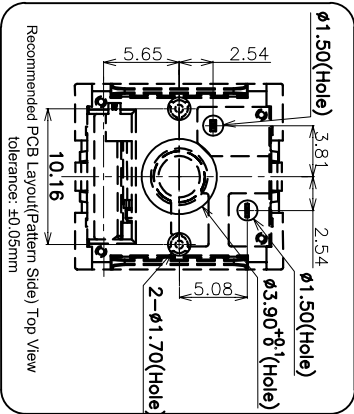

A

B

C

D

E

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
5	A		NEW			
4						
3						
2						
1						

A

B

C

D

E