


JP2	
Pin NO.	Pin Name
1	SCL
2	SDA
3	VDD
4	VSS
Interface IIC	

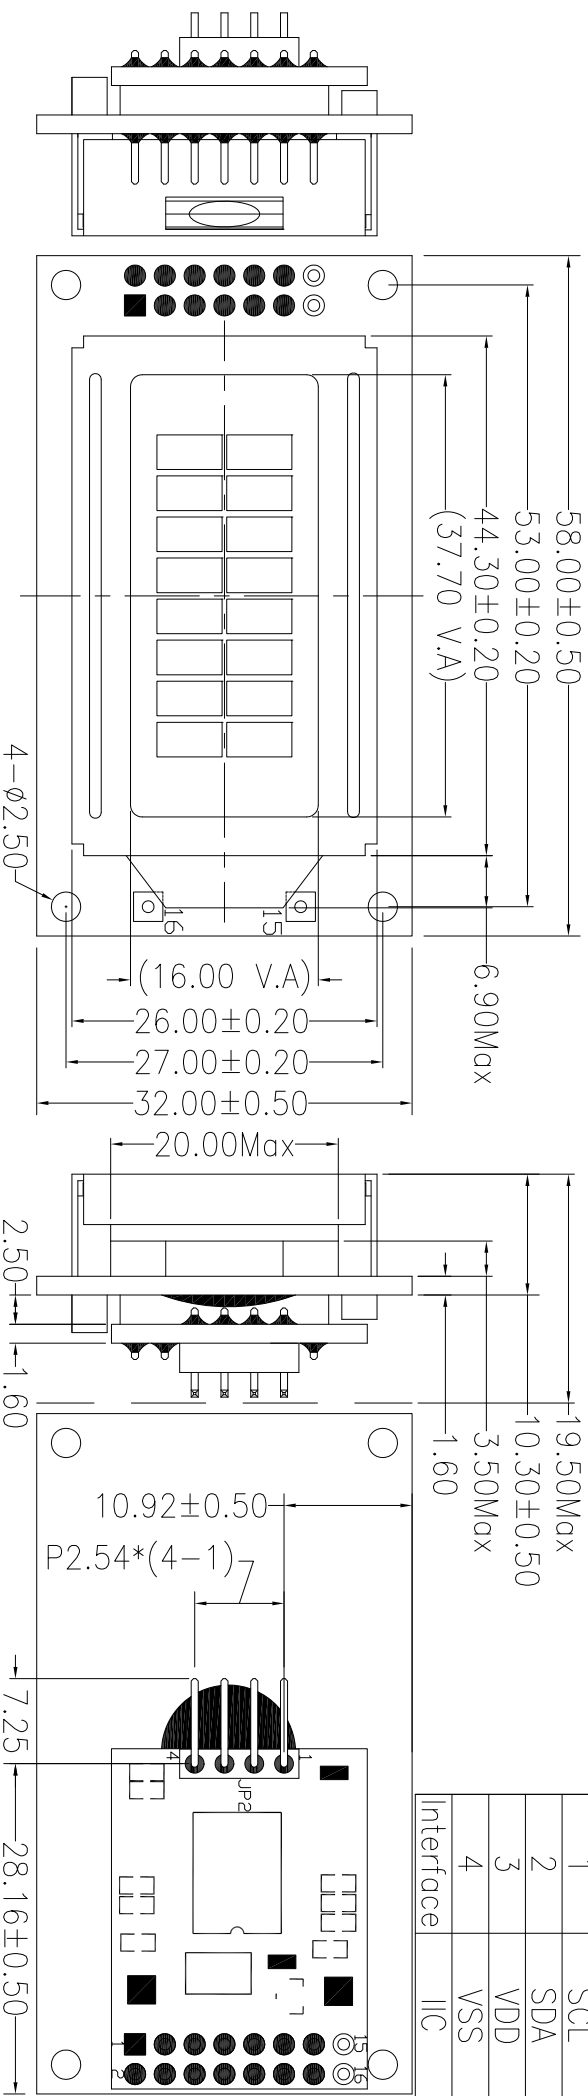

DETAIL DOTS

SPECIFICATIONS:

- 1.DISPLAY TYPE:YELLOW—GREEN/STN
- 2.VIEWING DIRECTION:6:00 O'CLOCK
- 3.POLARIZER MODE:TRANSPARENT/POSITIVE
- 4.DRIVE METHOD:1/16 DUTY,1/5 BIAS
- 5.OPERATING TEMP:-20°C---+70°C
- 6.STORAGE TEMP:-30°C---+80°C
- 7.WORKING VOLTAGE:VDD—VSS=+5.0VDC
- 8.BACKLIGHT:YELLOW—GREEN
- 9.ALL UNMARKED TOLERANCES:±0.30mm/±0.5°



深圳市佳显电子技术有限公司
Shenzhen Goodview Electronic Technology Co.,Ltd



绘图: 李建清 Drawn by: 李建清	绘图编号: LCM-SJXD0802A-IDYSYWN Drawing No.: LCM-SJXD0802A-IDYSYWN	单位: mm Unit: mm
审核: 李建清 Checked by: 李建清	客户编号: 20240809 Customer No.: 20240809	日期: 2024-08-09 Date: 2024-08-09
批准: 李建清 Approved by: 李建清	图纸版号: V1 Drawing Version: V1	页数: 1/1 Sheet No.: 1/1

版本 标记 Ver. Mark	更 改 Modify the content	内 容 Content	更 改 人 Modified by	日 期 Date	版本 标记 Ver. Mark	更 改 Modify the content	内 容 Content	更 改 人 Modified by	日 期 Date
					V1		First issue	李建清	20240809