

Toslink to Coaxial Audio Converter

Quick Installation Guide Ver. 1.0

All brand names and trademarks are properties of their respective owners

INTRODUCTION:

This Converter enables a Toslink audio signal to be converted to Coaxial Digital Audio, for Home Theater Surround Sound Applications or Computer Musical Systems.

This converter supports both PCM and Bitstream signals. These do not decode the audio signal just convert between the electrical signal and the coaxial signal. They support all decode formats that the respective interface supports.

FEATURES:


- Supports Toslink to coaxial conversion
- Supports up to Dolby Digital or DTS 5.1
- Sample Rates: 44.1 kHz/ 48kHz / 96 kHz/ 192kHz
- Small size
- Easy installation

PACKAGE CONTENTS:

Before attempting to use this unit, please check the packaging and make sure the following items are contained in the shipping carton:

- 1) 1 x Toslink to Coaxial Audio Converter
- 2) 1 x USB Power Cable
- 3) 1 x User manual

CONNECTION DIAGRAM:

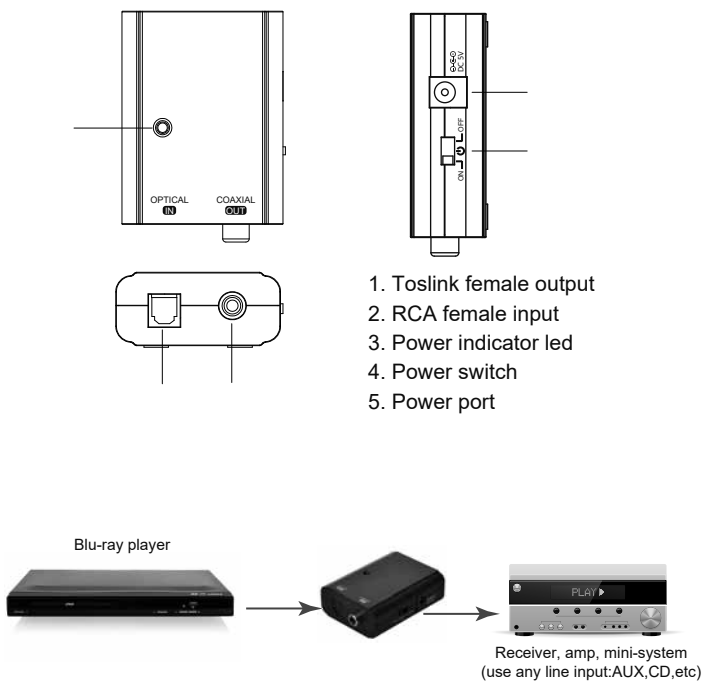

SPECIFICATIONS:

Product	Digital Audio Converter
Dimensions (l x w x h)	
Weight	
Power input	5.0 VDC / 0.6 A
Conversion	Toslink to RCA
Power switch	Yes
Power indicator LED	Yes
Supported formats	DTS, DTS5.1, Dolby Digital, Dolby Digital 5.1, PCM, AAC, MPEG02
Supported bitrates	44.1 kHz 24-bit 48 kHz 24-bit 96 kHz 24-bit