


MR2-R SERIES


ROUND ROCKER SWITCHES UP TO 20A 125VAC

Single pole illuminated or non-illuminated

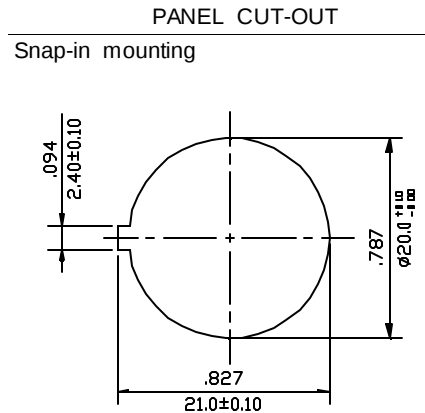

- 20A 125VAC, 12A 250VAC (UL, CUL)
- 10A 125VAC / 6A 250VAC (UL, CSA)
- 6A 125VAC / 3A 250VAC (UL, CSA)
- 6A 250VAC (CQC)
- 10(4)A 250VAC-T125 (VDE, SEMKO, DEMKO, NEMKO, FIMKO, SEV)
- Initial contact resistance : 20m Ω max.
- Insulation resistance : 100M Ω min, at 500VDC
- Dielectric strength : 1,000 VAC for 1 minute
- Electrical life : 10,000 cycles
- Temperature range : -20 to + 125

- Switch for Class II appliances
- Base : Nylon 66, UL rated 94V-2 min.
- Actuator : PC, UL rated 94V-2 min.
- Spring : Piano wire
- Contact arm : Silver plated copper alloy
- Terminals : Silver plated copper
- Lamp: Neon for AC; Tungsten bulb for DC
- Soft outlook / round rocker for illuminated types

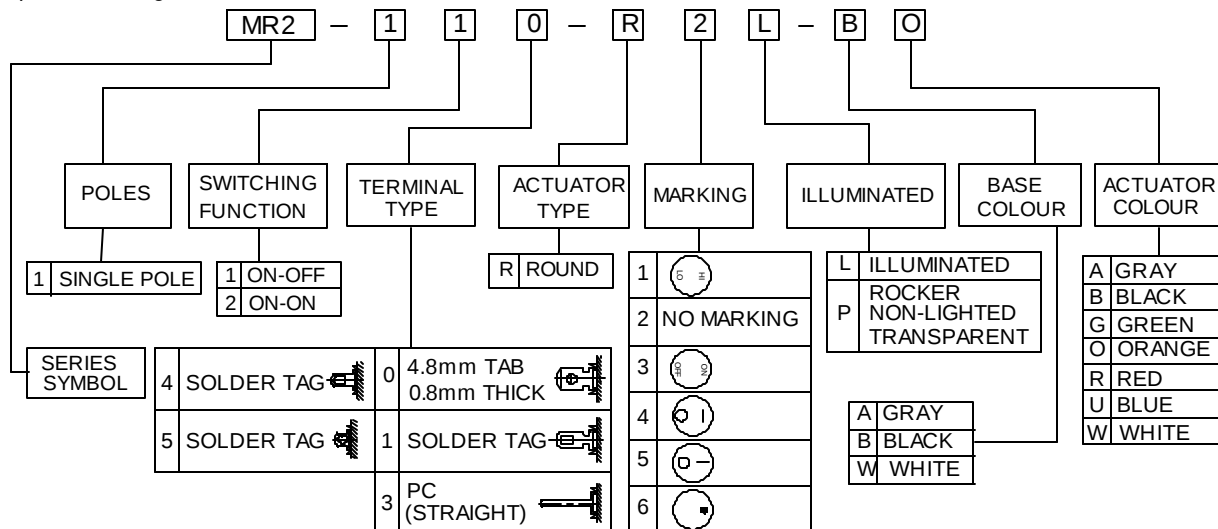

MR2-110-R2L-BR

