




SIM800L_Hardware_Design_V1.00

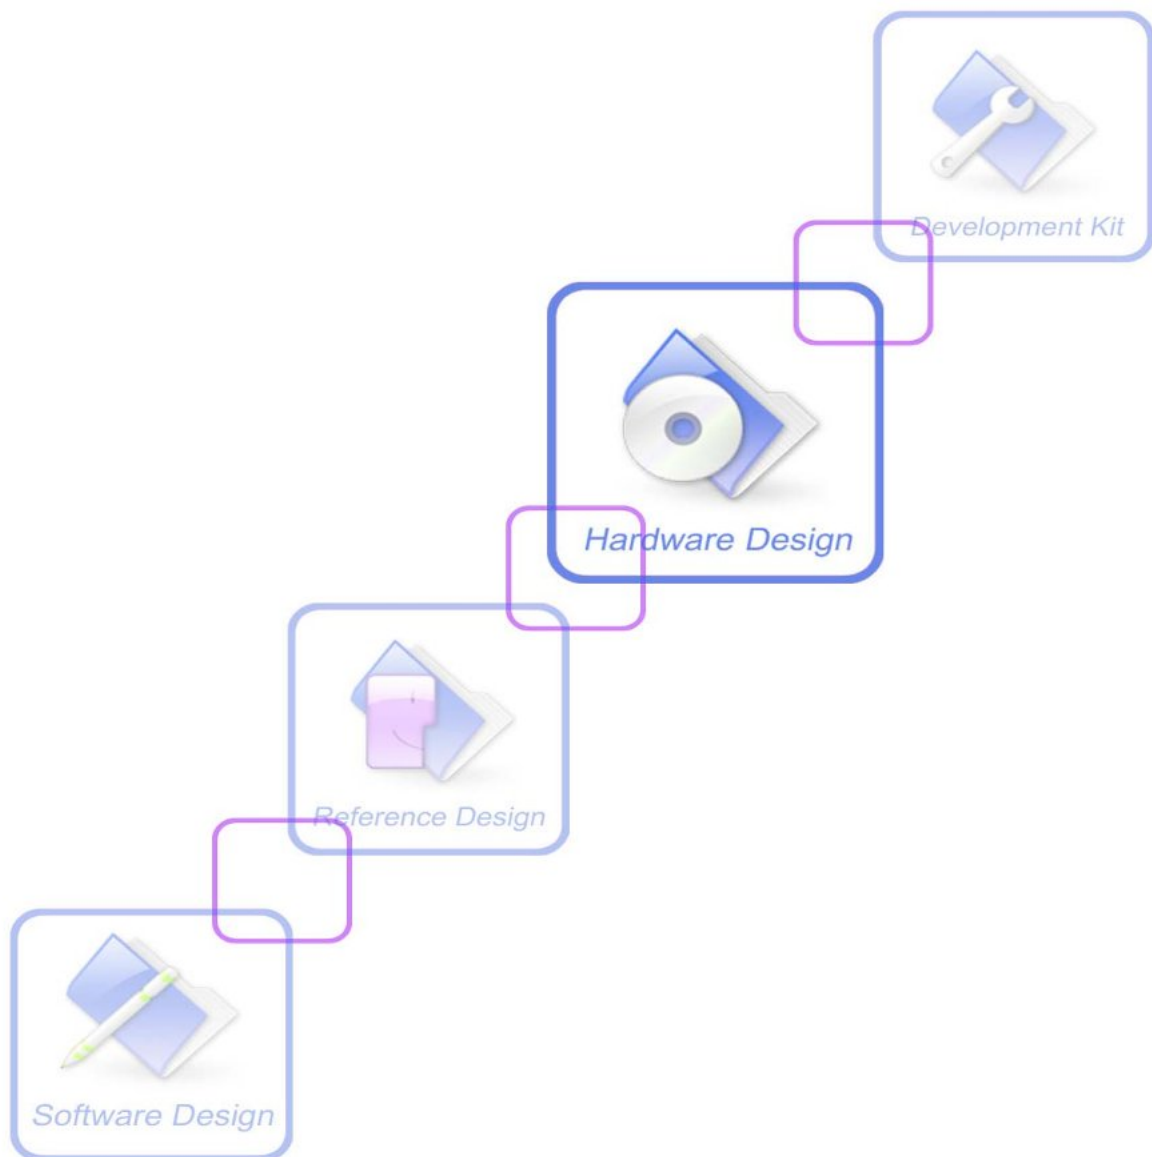

Document Title	SIM800L Hardware Design
Version	1.00
Date	2013-08-20
Status	Release
Document Control ID	SIM800L_Hardware_Design_V1.00

General Notes

SIMCom offers this information as a service to its customers, to support application and engineering efforts that use the products designed by SIMCom. The information provided is based upon requirements specifically provided to SIMCom by the customers. SIMCom has not undertaken any independent search for additional relevant information, including any information that may be in the customer's possession. Furthermore, system validation of this product designed by SIMCom within a larger electronic system remains the responsibility of the customer or the customer's system integrator. All specifications supplied herein are subject to change.

Copyright

This document contains proprietary technical information which is the property of SIMCom Limited, copying of this document and giving it to others and the using or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights reserved in the event of grant of a patent or the registration of a utility model or design. All specification supplied herein are subject to change without notice at any time.

Copyright © Shanghai SIMCom Wireless Solutions Ltd. 2013

Contents

Version History.....	10
1. Introduction.....	11
2. SIM800L Overview.....	11
2.1. SIM800L Key Features.....	11
2.2. Operating Mode	13
2.3. Functional Diagram.....	14
3. Package Information	15
3.1. Pin out Diagram	15
3.2. Pin Description.....	16
3.3. Package Dimensions	19
4. Application Interface.....	21
4.1. Power Supply	21
4.1.1. Power supply pin.....	22
4.1.2. Monitoring Power Supply	23
4.2. Power on/down Scenarios.....	23
4.2.1. Power on SIM800L	23
4.2.2. Power down SIM800L	24
4.2.3. Reset Function.....	26
4.3. Power Saving Mode	27
4.3.1. Minimum Functionality Mode	27
4.3.2. Sleep Mode (AT+CSCLK=1)	28
4.3.3. Wake Up SIM800L from Sleep Mode (AT+CSCLK=1).....	28
4.4. RTC Backup.....	28
4.5. Serial Port and USB Interface.....	29
4.5.1. Function of Serial Port	30
4.5.2. Serial Interfaces.....	30
4.5.3. Debug Interface.....	33
4.5.4. Software Upgrade and Debug	33
4.5.5. Multiplexing function of serial port	34
4.6. RI Behaviors	35
4.7. Audio Interfaces.....	36
4.7.1. Speaker Interfaces Configuration.....	37
4.7.2. Microphone Interfaces Configuration	37
4.7.3. Audio Electronic Characteristic	38
4.7.4. TDD	38
4.8. SIM Card Interface.....	38
4.8.1. SIM Card Application	39
4.8.2. SIM Card Design Guide.....	40

4.8.3.	Design Considerations for SIM Card Holder	40
4.9.	PCM Interface	42
4.9.1.	PCM Multiplexing Function	43
4.9.2.	PCM Interface	43
4.9.3.	LCD Display/SPI Interface	44
4.9.4.	SD Card Interface.....	44
4.10.	Keypad Interface	45
4.10.1.	Keypad Multiplexing Function.....	47
4.11.	I2C Bus	47
4.11.1.	I2C Multiplexing Function	48
4.12.	General Purpose Input/Output (GPIO)	48
4.13.	ADC	48
4.14.	PWM	48
4.14.1.	PWM Multiplexing Function.....	49
4.15.	Network Status Indication.....	49
4.15.1.	NETLIGHT Multiplexing Function.....	50
4.16.	Operating Status Indication.....	50
4.16.1.	STATUS Multiplexing Function	51
4.17.	LED Interface.....	51
4.18.	RF Synchronization Signal	51
4.19.	Antenna Interface.....	52
4.19.1.	GSM Antenna Interface	52
4.19.2.	FM Antenna Interface	53
5.	PCB Layout	55
5.1	Pin Assignment	55
5.2	Principle of PCB layout	56
5.2.1	Antenna Interface.....	56
5.2.2.	Power Supply	56
5.2.3	SIM Card Interface.....	56
5.2.4	Audio Interface.....	56
5.2.5	Others	56
5.3	Recommended PCB Layout.....	57
6.	Electrical, Reliability and Radio Characteristics	58
6.1	Absolute Maximum Ratings	58
6.2	Recommended Operating Conditions	58
6.3	Digital Interface Characteristics.....	58
6.4	SIM Card Interface Characteristics.....	59
6.5	SIM_VDD Characteristics	59
6.6	VDD_EXT Characteristics	59
6.7	VRTC Characteristics	59
6.8	Current Consumption (VBAT=3.8V)	60
6.9	Electro-Static Discharge	61
6.10	Radio Characteristics	61
6.10.1.	Module RF Output Power.....	61
6.11	Module RF Receive Sensitivity	62