

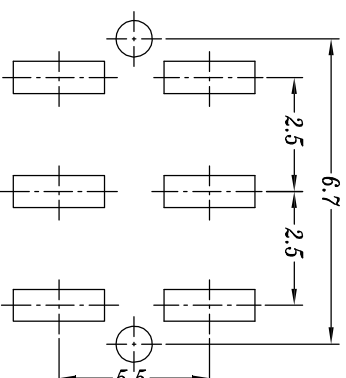





P.C.B LAYOUT

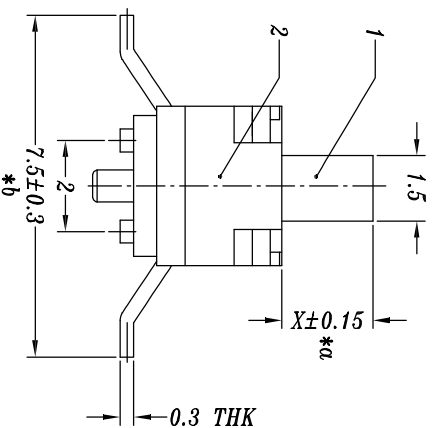

SPECIFICATION

1. Rating: DC 12V 0.3A
2. Travel: 2 mm
3. Function: 2P2T
4. Contact Resistance: $\leq 70\text{m}\Omega\text{MAX}$
5. Operating Force: $150\pm 50\text{gf}$, $200\pm 80\text{gf}$, $300\pm 100\text{gf}$
6. Life test: 10,000 cycles

KNOB $X=\sqrt{3, 4, 5\text{mm}}$

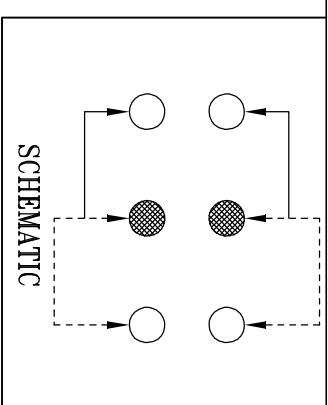

8					TOLERANCE UNLESS SPECIFIED						
7											
6					WITHIN 1.5: ±0.1mm OVER 1.5: ±0.2mm ANGLES: ±2°						
5	TERMINAL	BRASS	6	Ag PLATED	ISSUE	DATE	DESCRIPTIONS		APPL.		
4	CONTACT	BRONZE	2	NATURAL	TITLE: MINI SLIDE SWITCH		UNIT: mm	DRWG. NO.:			
3	CASE	PA6T	1	BLACK	MODEL NO: MS-22D17G2 带柱		SCALE: 4:1	DWN	YINONG		
2	COVER	SUS	1					CHK'D	ZHANGZHIHUI		
1	KNOB	PA6T	1	BLACK				APPL.	LILISUNJUN		
NO.	DESCRIPTION	MATERIAL	QTY	PLATING	DONGGUAN JINBAOLI ELECTRONICS CO.,LTD						