


SPECIFICATIONS：

1、Rated Voltage：0.66KV
2、Insulation Voltage：5KV
3、Rated Frequency：50HZ or 60HZ
4、Operating Temperature：-15℃ to 60℃
5、Flame resistance：UL94-V0
6、Certificates：CE、UL2808

Model	Input（A）	Max current（A）	Output
XH-SCT-S24	0-300A	300A	mA/0.333VAC/0-5VAC

DIMENSIONS(mm)：

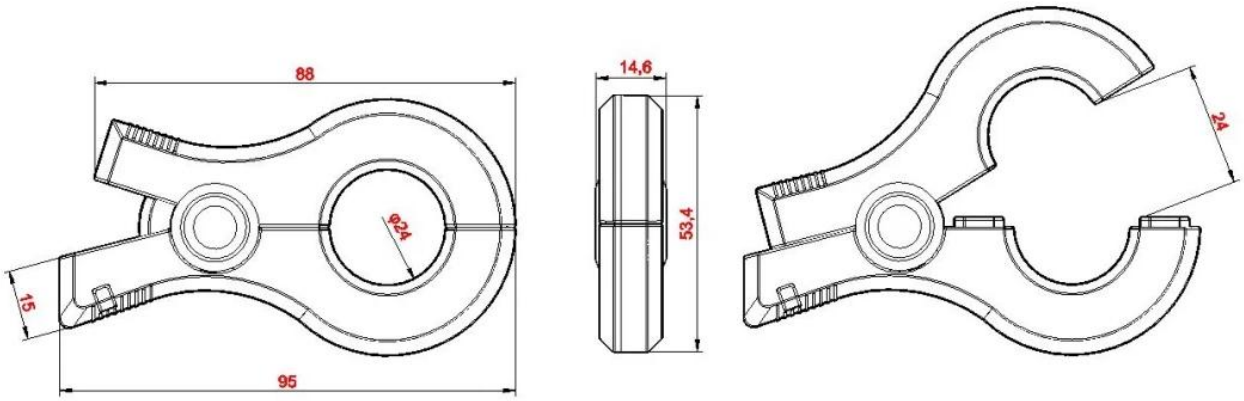

FEATURES：

1、Small cost

2、Split core design ,Easier installation
3、Build diode ,no high voltage danger
4、Good linearity at very low current

APPLICATIONS:

Sub-Metering Accurate Measurement
Data Loggers to analyze Building & Machinery Performance
Digital Fault Recorders
Smart Grid Application Features
Load Center
Three Phase Balance Control
In-Factory Display In-Home Display
Inverters for Solar & Wind Turbine Systems
Power Measurement Device For PLC

CURVE PERFORMANCE：

