


TS SERIES


ILLUMINATED TACT SWITCHES UP TO 12VDC 50mA, LEN LIGHT EFFECT
SMD type available; Round or Square Housing, 6X6mm body

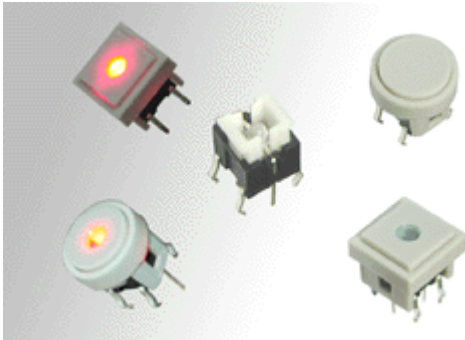


PCB Mounting Hole

- Rating: 12VDC, 50mA
- Initial contact resistance : 50m Ohm max.
- Insulation resistance : 100M min, at 250VDC
- Dielectric strength : 250 VAC for 1 minute
- Temperature range : -20 to +70 degrees in celsius
- Operating force: 160gf +/- 30
- Switch life: 100,000 cycles minimum
- LED: 20mA 4V
- Actuator: PBT
- Housing: Nylon
- Cap: ABS
- Contacts: Gold plated copper alloy
- Terminals: Brass, gold plated


How-to-Order

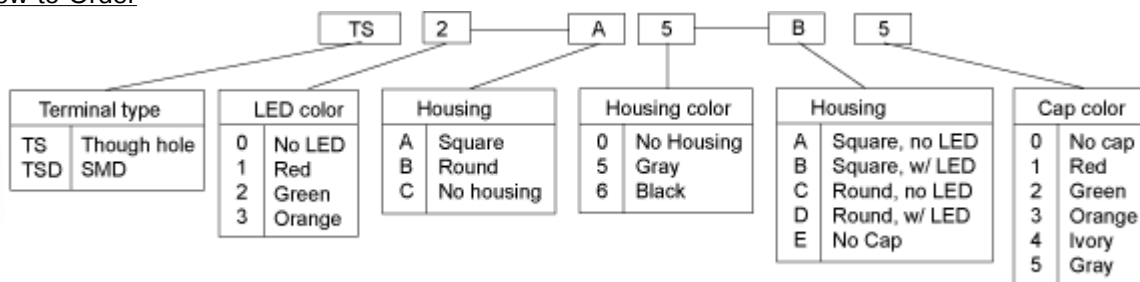


TSD-2-A5-B5

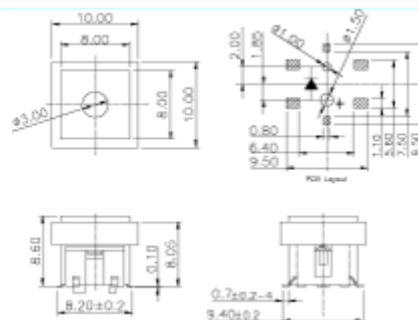

TS-*C

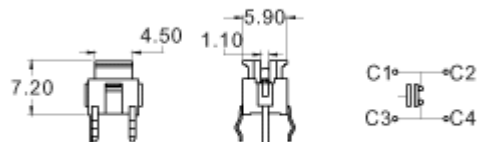

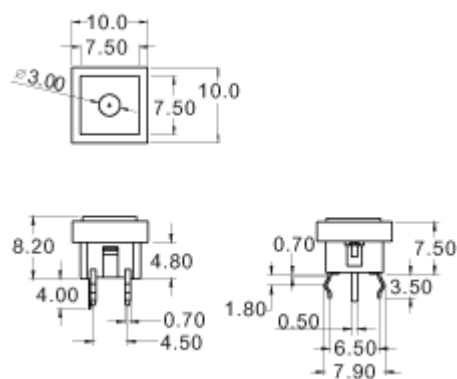TS-*ATS-*B